


ECOHiLUX照明器具 配光データシート

意匠図

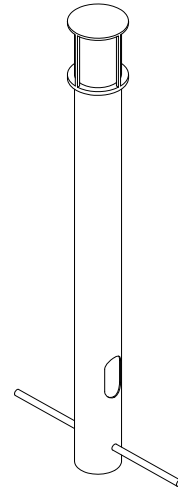


器具品名	ガーデンライト			保守率	
器具品番	TEE6-E17GSIS TEE6-E17GBIS			良	0.90
部品品名	LED電球			中	0.85
部品品番	LDA4L-G-E17-4T5			否	0.80
器具光束	440lm	最大取付間隔		器具効率	
光源	-	AA	-	上方向	46%
光源光束	-	BB	-	下方向	54%
				全方向	100%

照明率表

作業面照明率(×0.01)

反(天井)	80								70								50				30				0				
	壁		70		50		30		10		70		50		30		10		50		30		10		30		10		0
射率)	床		30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10
室 指 数	0.4	35	33	22	21	15	15	10	32	30	20	20	14	13	9	17	16	11	11	7	8	8	5	2					
	0.6	47	43	32	30	23	22	16	42	39	29	28	21	20	15	24	23	17	16	12	13	13	9	4					
	0.8	56	51	40	37	30	29	22	50	46	36	34	27	26	20	30	28	22	22	17	18	17	13	6					
	1	63	56	47	44	36	34	27	57	51	43	40	33	32	25	35	33	27	26	21	22	21	17	9					
	1.25	70	62	54	50	43	40	33	63	57	49	46	39	37	31	40	38	32	31	26	26	25	21	12					
	1.5	75	66	60	54	49	45	38	68	60	55	50	45	42	35	45	42	37	35	30	30	29	24	15					
	2	83	72	69	62	58	53	46	75	66	63	57	53	49	43	51	48	44	41	36	35	34	30	19					
	2.5	88	76	75	67	65	59	52	79	70	69	62	60	55	48	56	52	49	46	41	40	38	34	22					
	3	92	79	80	70	71	63	57	83	73	73	65	65	59	53	60	55	53	50	45	43	41	37	25					
	4	97	83	87	76	79	69	64	88	76	79	70	72	64	59	65	60	59	55	51	48	46	42	29					
5	101	85	92	79	84	74	68	91	79	84	73	77	68	64	69	63	64	59	55	52	49	46	32						
7	105	88	98	83	92	79	75	95	82	89	78	84	74	70	73	66	69	63	60	56	53	51	37						
10	108	91	103	87	98	83	80	98	84	94	81	90	78	75	77	70	74	67	65	60	57	55	40						

配光曲線

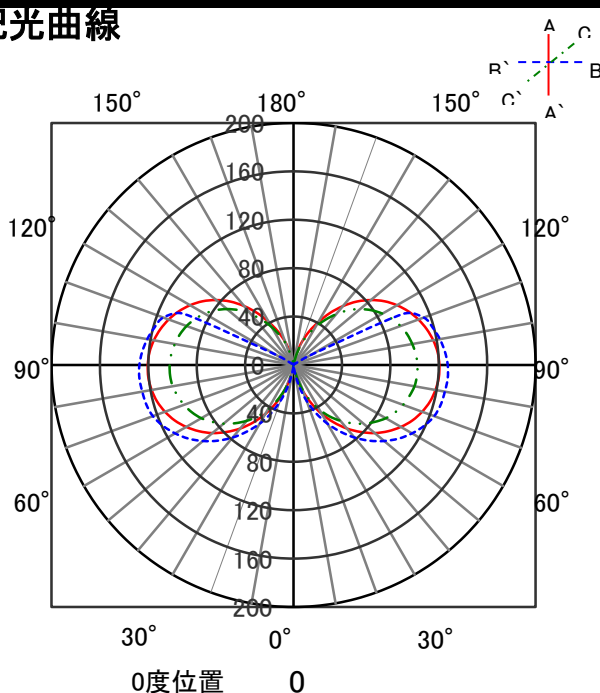

直射水平面照度

