


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ベースダウンライト	保守率	
器具品番	DL8L38-7A4BW-D DL8L38-7A4BW-DLS	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	719lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

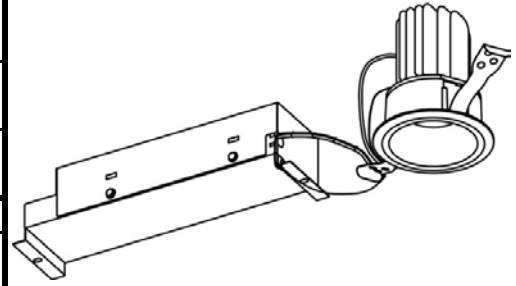

照明率表

		作業面照明率(×0.01)																						
反射率	天井	80				70				50				30				0						
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	10	30	10	10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室 指 数	0.4	62	58	50	48	44	43	39	61	57	50	48	44	43	39	49	48	43	43	39	43	42	39	38
	0.6	81	74	69	66	62	60	57	79	73	68	65	62	60	56	67	64	61	60	56	60	59	56	55
	0.8	92	83	81	76	73	70	67	90	82	80	75	73	70	67	78	74	72	70	66	71	69	66	65
	1	99	89	88	82	81	77	73	96	88	87	81	80	77	73	84	80	79	76	73	77	75	72	71
	1.25	105	93	96	88	89	83	80	103	92	94	87	88	83	80	91	86	86	82	79	84	81	79	77
	1.5	109	96	100	91	94	87	84	106	95	98	90	92	87	84	95	89	90	86	83	88	85	82	81
	2	115	100	107	96	101	92	89	112	99	105	95	99	92	89	100	93	96	91	88	93	89	87	85
	2.5	118	102	112	99	106	96	93	115	101	109	98	104	95	93	104	96	100	94	92	96	92	91	89
	3	121	104	115	101	110	98	96	117	102	112	100	107	97	95	106	98	103	96	94	99	95	93	91
	4	124	105	119	103	115	101	99	120	104	116	102	112	100	99	110	100	107	99	97	102	97	96	94
5	126	107	122	105	118	103	102	122	105	118	104	115	102	101	112	102	109	101	99	104	99	98	95	
7	128	108	125	107	123	105	104	124	107	121	105	119	104	103	114	103	112	103	102	106	101	100	98	
10	130	109	128	108	126	107	106	125	108	124	107	122	106	105	116	105	115	104	104	108	102	102	99	

配光曲線

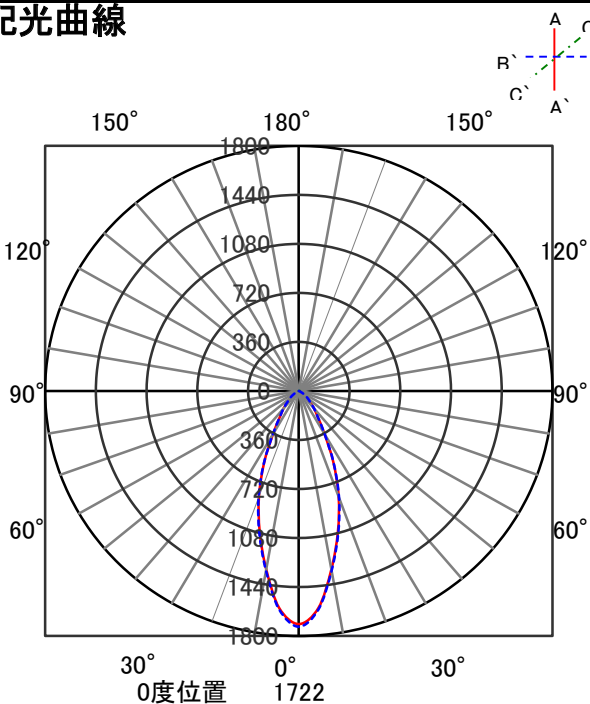

直射水平面照度

