


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	ベースダウンライト	保守率	
器具品番	DL11N8-10A6BW-D DL11N8-10A6BW-DLS	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1012lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

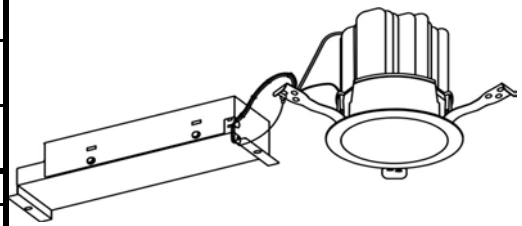

## 照明率表

		作業面照明率(×0.01)																														
反射率	天井	80								70								50				30				0						
		70	10	30	10	30	10	30	10	70	10	30	10	30	10	30	10	50	10	30	10	30	10	30	10	30	10	30	10	30	10	30
室 指 数	0.4	62	58	51	49	45	44	40	61	58	50	49	44	44	40	50	48	44	43	40	44	43	40	39								
	0.6	81	75	70	66	63	61	57	79	74	69	66	63	61	57	68	65	62	60	57	61	60	57	56								
	0.8	92	83	81	76	74	71	67	90	82	80	76	74	71	67	78	75	72	70	67	71	70	67	65								
	1	99	89	89	82	82	78	74	97	88	87	82	81	77	74	85	80	79	77	73	78	76	73	72								
	1.25	105	93	96	88	89	84	80	103	92	94	87	88	83	80	91	86	86	82	80	84	82	79	77								
	1.5	109	96	100	91	94	87	84	106	95	99	90	93	87	84	95	89	90	86	83	88	85	83	81								
	2	114	100	107	96	101	92	90	111	98	105	95	99	92	89	100	93	96	91	88	93	89	87	86								
	2.5	118	102	111	98	106	96	93	114	101	109	98	104	95	93	104	96	100	94	92	96	92	91	89								
	3	120	103	114	100	110	98	96	116	102	111	99	107	97	95	106	98	103	96	94	99	94	93	91								
	4	123	105	119	103	115	101	99	119	104	115	102	112	100	98	109	100	106	98	97	102	97	96									
5	125	106	121	104	118	103	101	121	105	118	103	115	102	100	111	101	109	100	99	104	98	95										
7	127	107	125	106	122	105	104	123	106	121	105	118	104	103	113	103	112	102	101	106	100	97										
10	129	108	127	107	125	107	106	125	107	123	106	121	106	105	115	104	114	104	103	108	102	99										

## 配光曲線

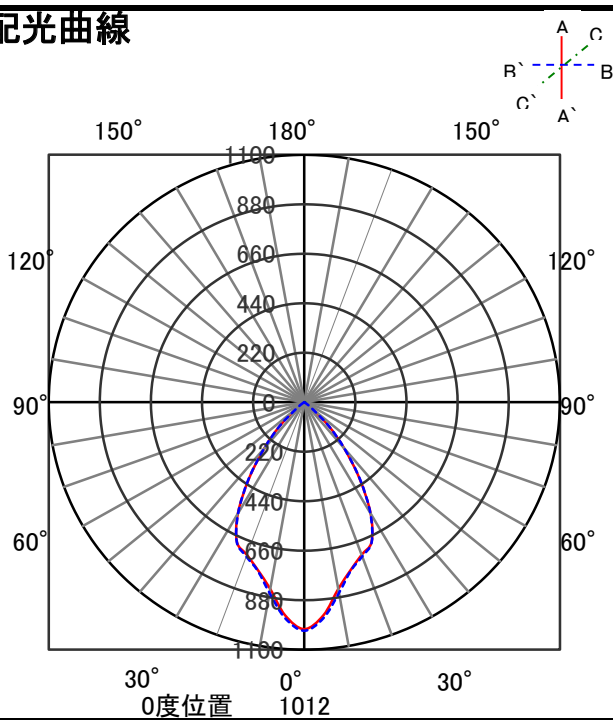

## 直射水平面照度

