


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	グレアレスユニバーサル ダウンライト	保守率	
器具品番	UV3L308-5G3W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	370lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

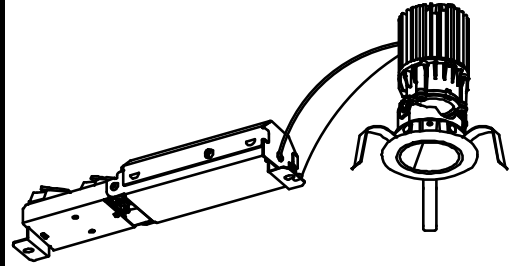

## 照明率表

		作業面照明率(×0.01)																																							
反射率	天井	80								70								50								30								0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0													
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	30	10	0													
室 指 数	0.4	68	64	57	55	51	50	47	67	63	57	55	51	50	47	56	54	50	50	47	50	49	46	45																	
	0.6	87	80	77	73	70	68	65	86	79	76	72	70	68	65	74	72	69	67	64	68	67	64	63																	
	0.8	97	88	87	82	81	77	74	95	87	86	81	80	77	74	84	80	79	77	74	78	76	73	72																	
	1	104	93	94	87	88	83	80	101	92	93	87	87	83	80	90	86	85	82	79	84	81	79	78																	
	1.25	109	97	101	92	94	88	85	107	96	99	92	93	88	85	96	90	91	87	85	89	86	84	83																	
	1.5	113	100	105	95	99	92	89	110	99	103	94	97	91	88	99	93	95	90	88	92	89	87	86																	
	2	118	103	111	99	105	96	93	115	102	108	98	103	95	93	104	97	100	94	92	97	93	91	90																	
	2.5	121	105	115	102	110	99	97	118	103	112	101	108	98	96	107	99	104	97	95	100	96	94	92																	
	3	123	106	118	103	113	101	99	120	105	115	102	111	100	99	109	101	106	99	97	102	98	96	94																	
	4	126	108	122	106	118	104	103	122	106	119	105	115	103	102	112	103	110	102	101	105	100	99	97																	
5	128	109	125	107	122	106	105	124	108	121	106	118	105	104	114	104	112	103	103	107	102	101	99																		
7	131	110	128	109	126	108	108	126	109	124	108	122	107	107	117	106	115	105	105	109	104	103	101																		
10	132	111	131	110	129	110	110	128	110	126	109	125	109	109	119	107	118	107	107	111	105	105	102																		

## 配光曲線

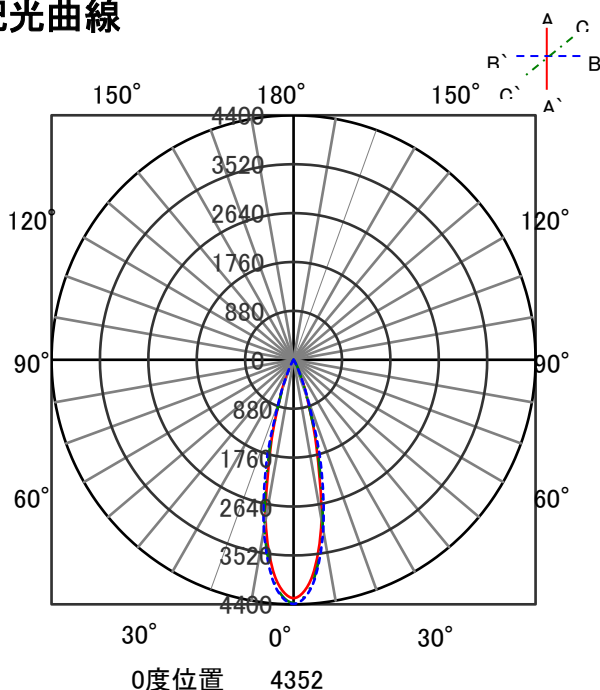

## 直射水平面照度

