


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	グレアレスピンホールダウンライト	保守率	
器具品番	UV3L278-55P2W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	360lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

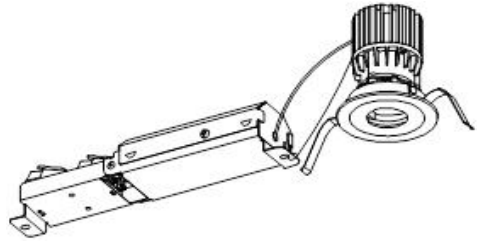

照明率表

		作業面照明率(×0.01)																																							
反射率	天井	80								70								50								30								0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0													
床		30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	0											
室 指 数	0.4	70	65	59	57	53	52	48	69	65	58	56	52	51	48	57	56	52	51	48	52	51	48	47	47	47	47	47	47												
	0.6	89	82	79	75	72	70	67	88	81	78	74	72	70	67	76	74	71	69	66	70	69	66	65	65	65	65	65	65												
	0.8	100	90	89	84	83	79	76	98	89	88	83	82	79	76	86	82	81	79	76	80	78	76	74	74	74	74	74	74												
	1	106	95	96	89	90	85	82	104	94	95	89	89	85	82	92	88	87	84	81	86	83	81	80	80	80	80	80	80	80											
	1.25	112	99	103	94	96	90	87	109	98	101	94	95	90	87	98	92	93	89	87	91	88	86	85	85	85	85	85	85	85											
	1.5	115	101	107	97	101	94	91	112	100	105	96	99	93	90	101	95	97	92	90	94	91	89	87	87	87	87	87	87	87											
	2	120	104	113	101	107	98	95	117	103	110	100	105	97	95	106	98	102	96	94	99	95	93	91	91	91	91	91	91	91											
	2.5	123	106	117	103	112	101	99	120	105	114	103	110	100	98	109	101	106	99	97	102	98	96	94	94	94	94	94	94	94											
	3	126	108	120	105	115	103	101	122	107	117	104	113	102	100	111	103	108	101	99	104	99	98	96	96	96	96	96	96	96											
	4	129	109	124	108	121	106	104	125	108	121	107	118	105	104	114	105	112	104	102	107	102	101	99	99	99	99	99	99	99											
5	131	111	127	109	124	108	107	126	109	123	108	121	107	106	117	106	115	105	104	109	104	103	100	100	100	100	100	100	100												
7	133	112	130	111	128	110	110	128	111	126	110	124	109	109	119	108	118	107	107	111	106	105	103	103	103	103	103	103	103												
10	135	113	133	112	132	112	112	130	112	129	111	127	111	111	121	109	120	109	109	113	107	107	104	104	104	104	104	104	104												

配光曲線



直射水平面照度

