


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	グレアレスピンホールダウンライト	保守率	
器具品番	UVS1L308-55P3W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	150lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

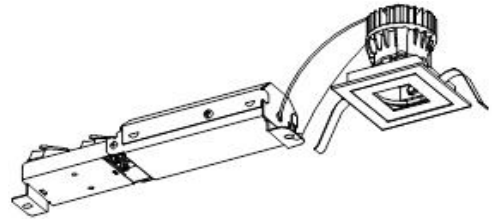

照明率表

		作業面照明率(×0.01)																																							
反射率	天井	80								70								50								30								0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0													
床		30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	0											
室 指 数	0.4	69	64	58	56	52	51	48	67	64	57	55	52	51	47	57	55	51	50	47	51	50	47	46	46	46	46	46	46												
	0.6	88	81	77	74	71	69	66	86	80	77	73	71	69	66	75	72	70	68	65	69	68	65	64	64	64	64	64	64												
	0.8	98	89	88	83	82	78	75	96	88	87	82	81	78	75	85	81	80	77	75	79	77	74	73	73	73	73	73	73												
	1	104	94	95	88	88	84	81	102	93	93	87	87	83	81	91	86	86	83	80	84	82	80	78	78	78	78	78	78												
	1.25	110	98	101	93	95	89	86	107	97	99	92	94	89	86	96	91	92	88	85	90	87	85	83	83	83	83	83	83												
	1.5	113	100	105	96	99	92	89	111	99	103	95	98	92	89	100	93	95	91	88	93	90	88	86	86	86	86	86	86												
	2	118	103	111	99	105	96	94	115	102	109	98	104	96	93	104	97	100	95	93	97	93	92	90	90	90	90	90	90												
	2.5	121	105	115	102	110	99	97	118	104	112	101	108	99	97	107	99	104	97	96	100	96	95	93	93	93	93	93	93												
	3	124	106	118	104	114	101	99	120	105	115	103	111	101	99	110	101	106	99	98	102	98	97	94	94	94	94	94	94												
	4	127	108	122	106	119	104	103	123	107	119	105	116	103	102	113	103	110	102	101	105	100	99	97	97	97	97	97	97												
5	129	109	125	107	122	106	105	124	108	121	106	119	105	104	115	105	113	104	103	107	102	101	99	99	99	99	99	99													
7	131	110	128	109	126	108	108	126	109	124	108	123	108	107	117	106	116	106	105	110	104	104	101	101	101	101	101	101													
10	132	111	131	111	130	110	110	128	110	127	109	125	109	109	119	107	118	107	107	111	105	105	102	102	102	102	102	102													

配光曲線

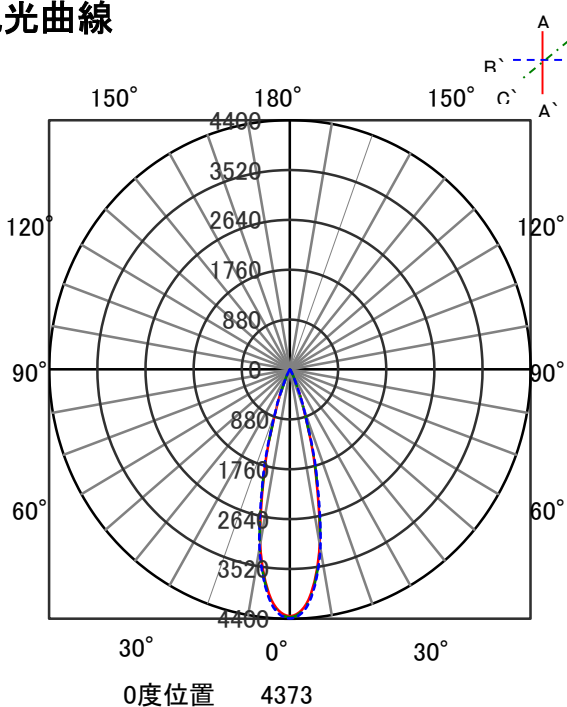

直射水平面照度

