


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	非常灯			保守率	
器具品番	IREL-DB23111			良	0.96
部品品名	-			中	0.93
部品品番	-			否	0.88
				器具効率	
器具光束	352lm	最大取付間隔		上方向	0%
光源	-	AA	3.18 H	下方向	100%
光源光束	-	BB	3.18 H	全方向	100%

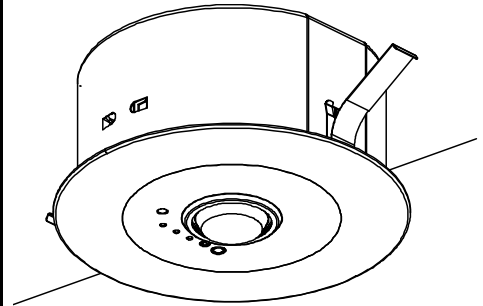

照明率表

作業面照明率(×0.01)																										
反 射 率	天井	80							70							50						30				0
	壁	70		50		30		10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室 指 数	0.4	35	33	20	19	11	11	6	34	32	19	19	11	11	6	18	18	11	11	6	11	10	6	4		
	0.6	50	46	33	32	23	22	16	48	45	32	31	23	22	16	31	30	22	21	16	21	21	15	13		
	0.8	64	58	47	44	36	34	27	61	56	46	43	35	34	27	43	41	34	33	27	33	32	27	24		
	1	74	66	57	53	46	44	37	71	64	56	52	46	43	37	53	50	44	43	36	43	42	36	33		
	1.25	83	74	68	62	57	54	47	80	72	66	61	56	53	47	63	59	54	52	46	53	51	46	43		
	1.5	90	80	76	69	66	61	55	87	78	74	68	65	60	54	70	66	62	59	54	60	58	53	51		
	2	100	87	88	79	78	72	66	96	85	86	78	77	71	65	81	75	74	70	65	71	68	64	61		
	2.5	106	92	96	85	87	79	74	102	90	93	84	85	78	73	88	81	82	76	72	78	75	71	69		
	3	110	95	101	89	94	83	79	106	93	98	88	91	83	78	93	85	87	81	77	83	80	76	74		
	4	116	98	108	94	102	90	86	111	97	105	93	99	89	85	99	90	94	87	84	90	85	83	80		
	5	119	101	113	97	107	94	90	115	99	109	96	104	93	90	103	93	99	91	88	94	89	87	84		
	7	123	103	118	100	114	98	95	118	102	114	99	110	97	95	107	97	104	95	93	98	93	91	89		
10	125	105	122	103	119	101	99	121	104	118	102	115	100	98	110	99	108	98	97	102	96	95	92			

配光曲線

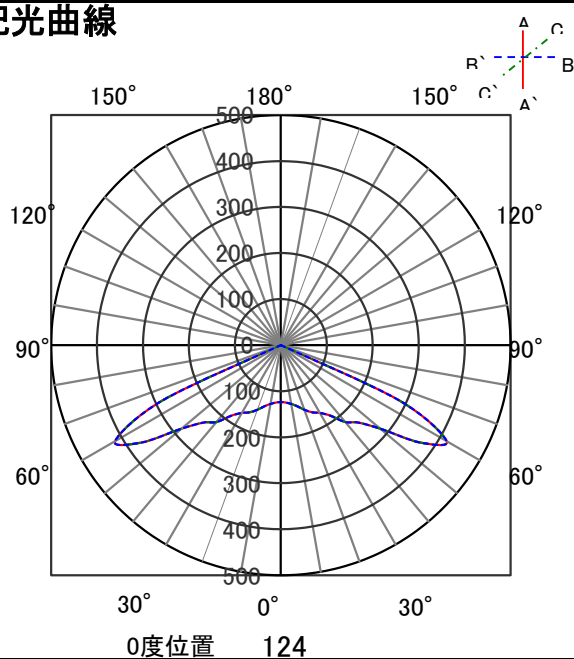

直射水平面照度

