


# ECOHiLUX照明器具 配光データシート


器具品名	グレアレスダウンライト	保守率	
器具品番	DL5L308-10G4W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	530lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

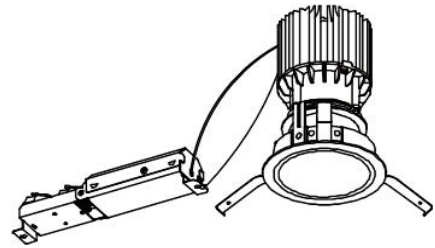

## 照明率表

		作業面照明率(×0.01)																									
反射率	天井	80								70								50				30				0	
	壁	70	10	50	10	30	10	10	10	70	10	30	10	30	10	10	10	50	10	30	10	10	10	30	10	10	10
室 指 数	0.4	67	63	57	55	51	50	47	66	63	56	55	51	50	47	56	54	50	50	47	50	49	47	45			
	0.6	86	80	76	72	70	68	65	85	79	75	72	70	68	65	74	71	69	67	64	68	67	64	63			
	0.8	96	88	87	81	80	77	74	95	87	86	81	80	77	74	84	80	79	76	74	77	76	73	72			
	1	103	92	93	87	87	83	80	100	91	92	86	86	82	79	90	85	85	82	79	83	81	79	77			
	1.25	108	96	100	91	93	88	85	106	95	98	91	92	87	85	95	89	90	86	84	88	86	84	82			
	1.5	112	98	104	94	98	91	88	109	97	102	93	96	90	88	98	92	94	89	87	91	88	86	85			
	2	116	101	109	98	104	95	92	113	100	107	97	102	94	92	103	95	99	93	91	96	92	90	89			
	2.5	119	103	113	100	108	98	96	116	102	111	99	106	97	95	106	98	102	96	94	99	95	93	91			
	3	122	104	116	102	112	100	98	118	103	113	101	109	99	97	108	99	105	98	96	101	96	95	93			
	4	125	106	120	104	117	103	101	121	105	117	103	114	102	101	111	102	109	100	99	104	99	98	96			
5	127	107	123	106	120	105	103	122	106	119	105	117	104	103	113	103	111	102	101	106	100	100	97				
7	129	108	126	107	124	107	106	124	107	122	106	121	106	105	115	105	114	104	104	108	102	102	99				
10	130	109	129	109	128	108	108	126	108	125	108	123	107	107	117	106	116	105	105	110	104	103	101				

## 配光曲線

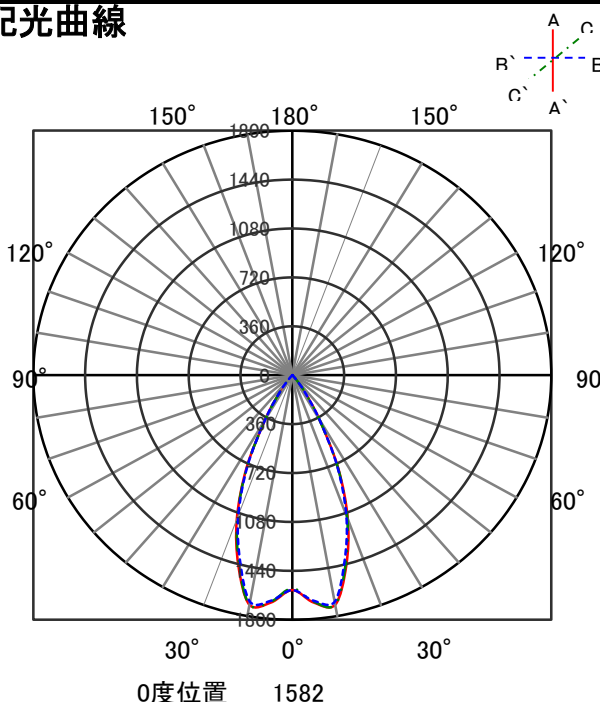

## 直射水平面照度

