


ECOHiLUX照明器具 配光データシート


器具品名	グレアレスダウンライト	保守率	
器具品番	DL5WW8-10G3W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	540lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

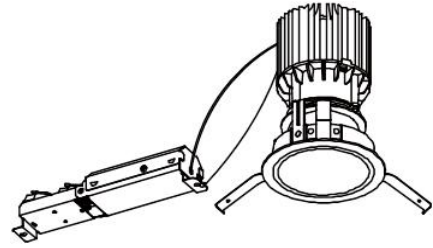

照明率表

		作業面照明率(×0.01)																								
反射率	天井	80								70								50				30				0
	壁	70	10	50	10	30	10	10	10	70	10	50	10	30	10	10	10	50	10	30	10	10	30	10	10	10
室 指 数	0.4	69	65	58	56	52	51	48	68	64	58	56	52	51	48	57	55	52	51	48	51	51	48	47		
	0.6	88	81	78	74	72	69	66	87	81	77	74	71	69	66	76	73	71	69	66	70	69	66	65		
	0.8	99	90	89	83	82	79	76	97	89	88	83	82	79	76	86	82	80	78	75	79	78	75	74		
	1	105	94	95	89	89	84	81	103	93	94	88	88	84	81	92	87	87	83	81	85	83	80	79		
	1.25	111	98	102	93	96	90	87	108	97	100	93	94	89	87	97	91	92	88	86	90	88	86	84		
	1.5	114	100	106	96	100	93	90	111	99	104	95	98	92	90	100	94	96	91	89	93	90	88	87		
	2	119	103	112	100	106	97	94	116	102	109	99	104	96	94	105	98	101	95	93	98	94	92	91		
	2.5	122	105	116	102	111	100	98	118	104	113	102	109	99	97	108	100	105	98	96	101	97	95	93		
	3	124	107	119	104	114	102	100	121	105	116	103	112	101	100	110	101	107	100	98	103	98	97	95		
	4	127	108	123	107	119	105	103	123	107	120	106	116	104	103	113	104	111	102	101	106	101	100	98		
5	129	109	126	108	123	107	106	125	108	122	107	119	106	105	115	105	113	104	103	108	103	102	100			
7	131	111	129	110	127	109	108	127	109	125	109	123	108	108	118	107	116	106	106	110	104	104	102			
10	133	111	132	111	130	111	110	129	110	127	110	126	110	109	119	108	119	108	108	112	106	106	103			

配光曲線

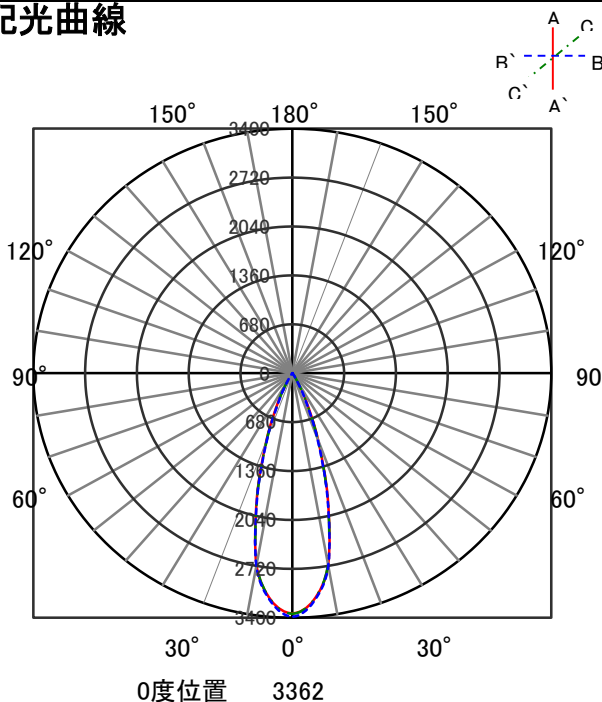

直射水平面照度

