


# ECOHiLUX照明器具 配光データシート


器具品名	グレアレスダウンライト	保守率	
器具品番	UV5L308-10G1W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	530lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

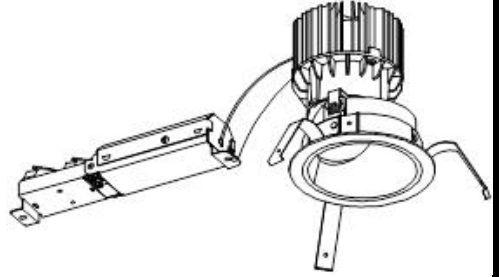

## 照明率表

		作業面照明率(×0.01)																								
反射率	天井	80								70								50				30				0
	壁	70	10	50	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10
室 指 数	0.4	69	64	58	56	52	51	47	68	64	57	55	51	51	47	56	55	51	50	47	51	50	47	46	46	46
	0.6	88	81	77	74	71	69	66	87	80	77	73	71	69	65	75	72	70	68	65	69	68	65	64	64	64
	0.8	98	89	88	83	82	78	75	97	88	87	82	81	78	75	85	81	80	78	75	79	77	74	73	73	73
	1	105	94	95	88	89	84	81	103	93	94	88	88	84	81	91	87	86	83	80	85	82	80	78	78	78
	1.25	111	98	102	93	95	89	86	108	97	100	93	94	89	86	97	91	92	88	86	90	87	85	84	84	84
	1.5	114	101	106	96	100	93	90	111	100	104	95	98	92	89	100	94	96	91	89	93	90	88	86	86	86
	2	119	104	112	100	106	97	94	116	103	109	99	104	96	94	105	98	101	95	93	98	94	92	90	90	90
	2.5	122	106	116	103	111	100	98	119	105	113	102	109	99	97	108	100	105	98	96	101	97	95	93	93	93
	3	125	107	119	104	114	102	100	121	106	116	103	112	101	100	110	102	107	100	98	103	99	97	95	95	95
	4	128	109	123	107	120	105	104	124	108	120	106	117	104	103	114	104	111	103	102	106	101	100	98	98	98
5	130	110	126	108	123	107	106	126	109	122	107	120	106	105	116	105	114	105	104	108	103	102	100	100	100	
7	132	111	130	110	127	109	109	128	110	126	109	124	108	108	118	107	117	107	106	111	105	104	102	102	102	
10	134	112	132	112	131	111	111	129	111	128	110	127	110	110	120	108	119	108	108	112	106	106	103	103	103	

## 配光曲線

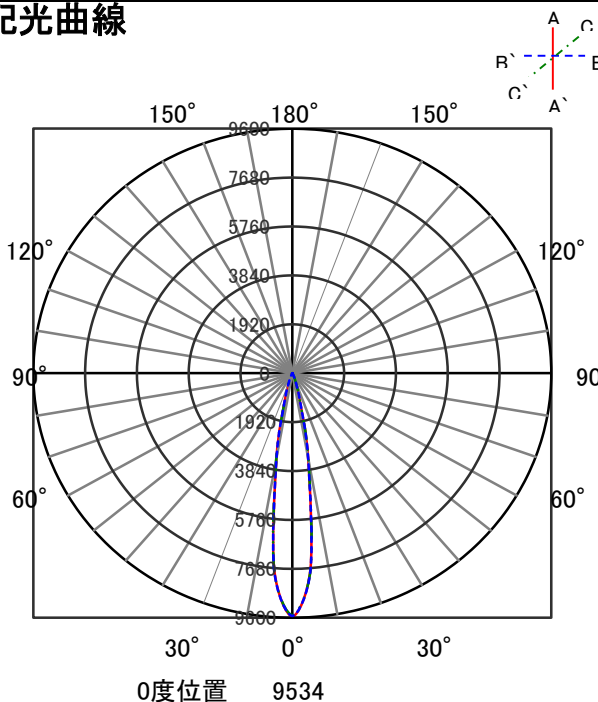

## 直射水平面照度

