

# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	高気密SB形ダウンライト	保守率	
器具品番	LSB100-E1750NCSW-V1	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
		器具効率	
器具光束	465lm	上方向	0%
光源	LDF6N-H-E17-V1	下方向	86%
光源光束	515lm	全方向	86%



## 照明率表

		作業面照明率(×0.01)																										
反射率	天井	80								70				50				30				0						
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室 指 数	0.4	47	44	33	32	26	25	21	46	43	33	32	26	25	21	32	31	25	25	21	25	25	21	19				
	0.6	65	60	50	48	42	41	35	63	58	50	47	41	40	35	48	46	41	40	35	40	39	35	33				
	0.8	75	68	60	57	51	49	43	73	67	59	56	51	49	43	57	55	50	48	43	49	47	43	41				
	1	84	75	70	65	60	57	52	81	74	68	64	60	57	52	66	62	58	56	51	57	55	51	49				
	1.25	92	82	79	73	70	66	61	89	80	78	72	69	65	60	74	70	67	64	60	65	64	59	57				
	1.5	97	86	85	77	76	71	66	94	84	83	76	75	70	65	80	75	73	69	65	70	68	64	62				
	2	105	91	94	84	86	79	74	101	90	92	83	84	78	73	87	81	81	77	73	78	75	72	70				
	2.5	110	95	101	89	94	84	80	106	94	98	88	92	84	80	93	86	88	82	79	84	81	78	75				
	3	113	97	105	92	98	88	84	109	96	102	91	96	87	83	97	89	92	86	82	88	84	81	79				
	4	118	100	111	96	105	93	89	114	99	108	95	103	92	89	102	93	97	90	88	93	88	86	84				
5	120	102	115	99	110	96	93	116	101	111	98	107	95	92	105	95	101	93	91	96	91	90	87					
7	124	104	119	102	116	99	97	119	103	115	100	112	98	96	108	98	106	97	95	100	95	93	91					
10	126	105	123	104	120	102	101	121	104	119	103	116	101	100	111	100	109	99	98	103	97	96	93					

## 配光曲線

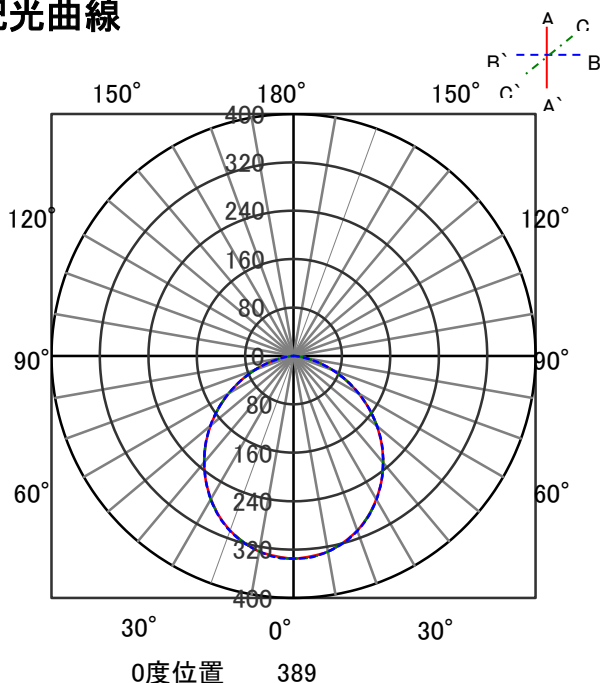

## 直射水平面照度

