


ECOHiLUX照明器具 配光データシート

器具品名	人感センサー付ダウンライト	保守率	
器具品番	LSB100-0627MSCAB-V4	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	350lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

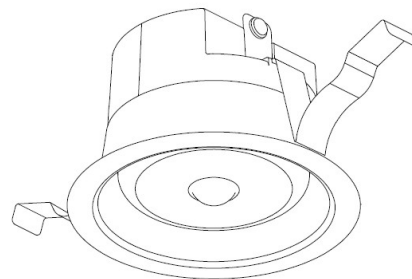


照明率表

作業面照明率(×0.01)

反射率(%)	天井	80								70								50						30				0
		壁	70		50		30		10	70		50		30		10	50		30		10	30		10	0			
			床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室 指 数	0.4	48	45	35	33	27	27	22	47	44	34	33	27	27	22	33	32	27	26	22	26	26	22	21				
	0.6	66	61	52	50	44	43	38	65	60	52	49	44	42	38	50	48	43	42	37	42	41	37	35				
	0.8	77	70	63	59	53	51	46	74	68	61	58	53	51	46	59	57	52	50	46	51	50	45	43				
	1	86	77	72	67	63	60	54	83	75	71	66	62	59	54	68	65	61	59	54	59	58	54	52				
	1.3	94	84	82	75	73	68	63	91	82	80	74	72	68	63	77	72	70	67	63	68	66	62	60				
	1.5	99	87	88	79	79	73	68	96	86	86	79	78	73	68	82	77	75	72	67	73	71	67	65				
	2	107	93	97	86	89	81	77	103	91	94	85	87	80	76	90	83	84	79	75	81	78	75	72				
	2.5	112	96	103	91	96	87	83	108	95	100	90	94	86	82	95	88	90	84	81	87	83	80	78				
	3	115	98	107	94	101	90	86	111	97	104	93	98	89	86	99	91	94	88	85	90	86	84	81				
	4	119	101	113	98	107	94	91	115	100	109	96	104	93	91	103	94	99	92	89	95	90	88	86				
	5	121	103	116	100	112	97	95	117	101	113	99	109	96	94	106	97	103	95	93	98	93	91	89				
	7	124	105	121	103	117	101	99	120	103	117	101	113	100	98	109	99	107	98	96	101	96	95	92				
10	127	106	124	104	121	103	102	122	105	120	103	117	102	101	112	101	110	100	99	104	98	97	94					

配光曲線

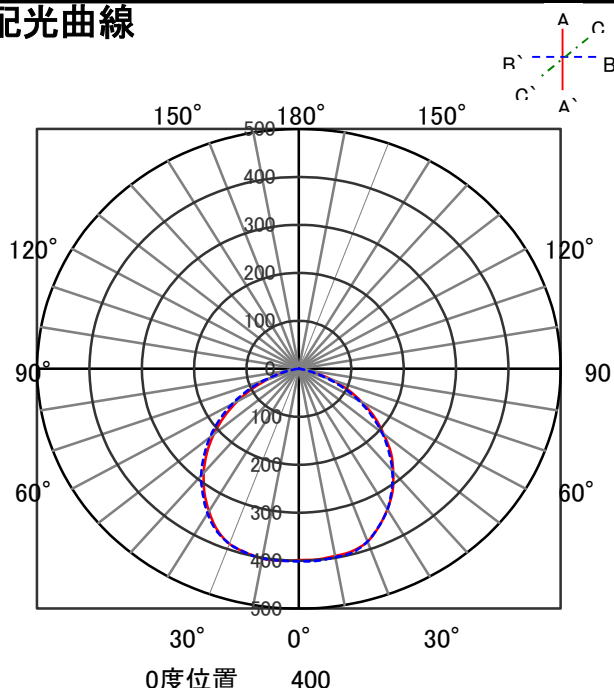

直射水平面照度

