

本シリーズは必ず専用電源ユニットとの組み合わせで使用してください。

No.				
1	1	PC		
2	1			
3	1	ADC		
4	1	SPC		
5	1	2PNCT 1.25 2C	1500mm	

ta=25






	()	(lm)	(K)	(AC-V)	Hz	(A)	(W)	(DC-V)	(h)	(kg)		
LDRSP85N-110BS	110	15000	5000	Ra75	100-242	50/60	0.87/100V 0.45/200V	85	200	60000	1	21

	(kg)			
PSU-94-215044CC	1.85	40 - 50	85 RH	

1 85%

△	
LED	85 RH
60m/s	
LED	LED
LED	LED
LED	LED
	10
	()

				LED
				LDRSP85N-110BS
				アイリスオーヤマ株式会社

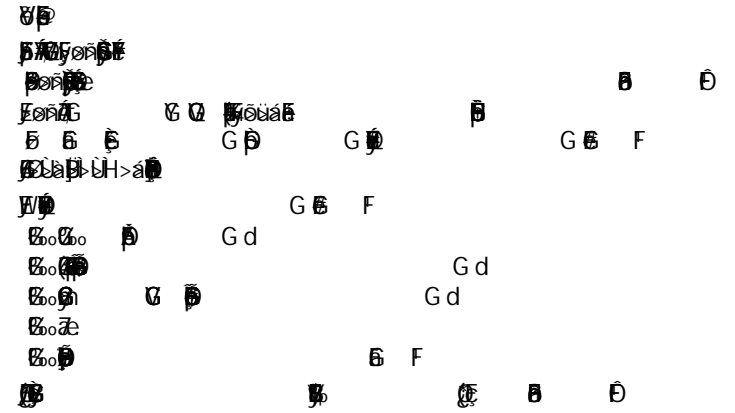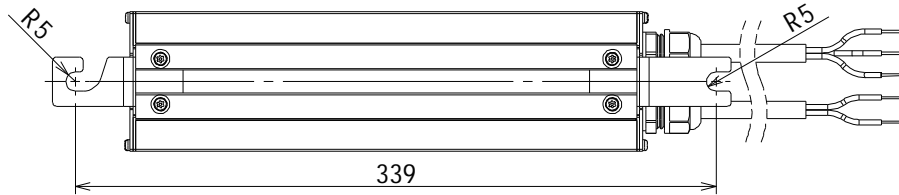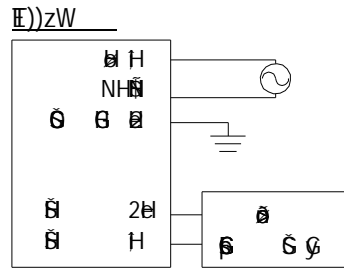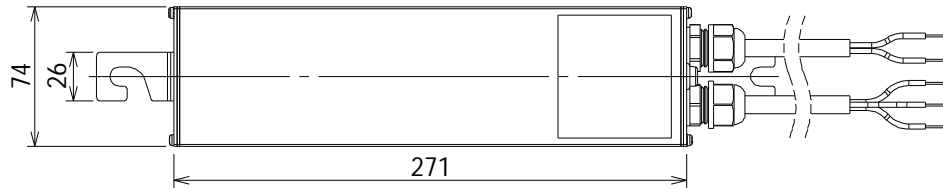

<p>警告</p> <p>電源取り付け向きに注意してください</p>	<p>口出し線向き</p> <p>鉛直下方向</p> <p>屋内：○ 屋外：○</p> <p>口出し線</p>	<p>水平方向</p> <p>屋内：○ 屋外：×</p>
	<p>電源横向き方向</p> <p>屋内：○ 屋外：×</p>	<p>上向き方向</p> <p>屋内：×</p> <p>屋外：×</p>

仕様
 仕様
 仕様

仕様
 仕様
 仕様

仕様
 仕様
 仕様

型番	A (W)	A (Hz)	A (A)	A (PH)	A (A)	A (W)	防塵 等級	重量 (kg)
PSU-1000-1000-1000-1000							IP65	1.0
PSU-1000-1000-1000-1000							IP65	1.0
PSU-1000-1000-1000-1000							IP65	1.0

25	W2	1		
30	UQ.	HIHI		
35	W	1		
40	1	1	アイリスオーヤマ株式会社	