


ECOHiLUX照明器具 配光データシート

意匠図

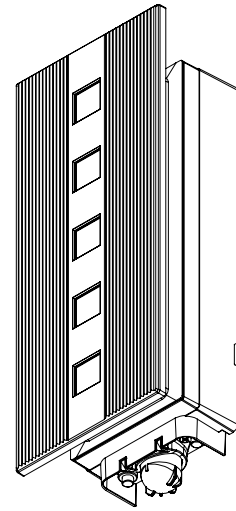


器具品名	縦型ポーチ灯	保守率	
器具品番	IRBR5N-VRSSB-MSBS	良	0.63
部品品名	-	中	0.60
部品品番	-	否	0.56
器具光束	210lm	器具効率	
光源	LED	上方向	46%
光源光束	一体型器具のため、器具光束表示	下方向	54%
		全方向	100%

照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70				50				30				0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	38	36	25	24	18	18	13	35	33	23	22	17	16	12	19	19	14	14	10	11	11	8	4					
	0.6	50	46	36	34	27	26	21	46	42	33	31	25	24	19	27	26	21	20	16	17	16	13	7					
	0.8	59	53	44	41	34	32	26	53	49	40	38	31	30	24	33	31	26	25	20	21	20	16	9					
	1	66	59	50	47	40	38	31	59	54	46	43	37	35	29	38	36	30	29	24	24	24	20	12					
	1.25	72	64	58	53	47	44	37	65	59	52	49	43	41	35	43	40	36	34	29	29	28	24	15					
	1.5	78	68	63	57	52	49	42	70	62	57	53	48	45	39	47	44	40	38	33	32	31	27	17					
	2	85	74	72	64	61	56	49	76	68	65	59	56	52	46	53	49	46	44	39	37	36	32	20					
	2.5	90	78	78	69	68	62	55	81	71	71	64	62	57	51	58	53	51	48	43	41	39	36	23					
	3	94	80	83	73	74	66	60	84	74	75	67	67	61	55	61	56	55	51	47	44	42	39	26					
	4	99	84	89	77	81	71	66	89	77	81	72	74	66	61	66	60	61	56	52	49	46	43	29					
5	102	86	94	81	87	75	71	92	80	85	75	79	70	66	69	63	65	59	56	52	49	47	32						
7	106	89	100	85	94	81	77	96	83	90	79	85	75	71	74	67	70	64	61	56	53	51	36						
10	110	92	104	88	100	85	82	99	85	95	82	91	79	76	77	70	74	67	65	60	56	55	39						

配光曲線

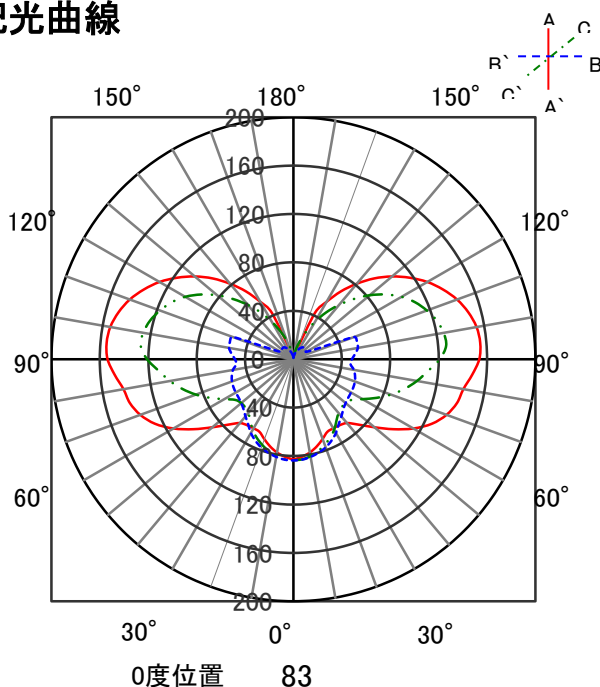

直射水平面照度

