


ECOHiLUX照明器具 配光データシート

意匠図


| | | | |
|------|--------------------|------|------|
| 器具品名 | 埋込型LEDベース照明 | 保守率 | |
| 器具品番 | BL-46WW-UKFSQ45-DA | 良 | 0.77 |
| 部品品名 | - | 中 | 0.72 |
| 部品品番 | - | 否 | 0.68 |
| 器具光束 | 4600lm | 器具効率 | |
| 光源 | - | 上方向 | 0% |
| 光源光束 | 一体型器具のため、器具光束表示 | 下方向 | 100% |
| | | 全方向 | 100% |

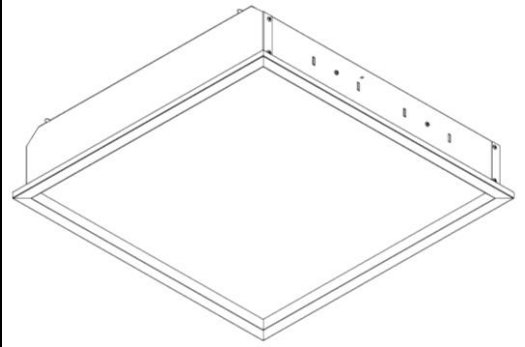

照明率表

| | | 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|----|-----|----|----|----|----|----|----|----|----|---|
| 反射率 | 天井 | 80 | | | | | | | | 70 | | | | 50 | | | | 30 | | | | 0 | | | | | | | |
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 30 | | 10 | | 30 | | 10 | | 0 | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 |
| 室 指 数 | 0.4 | 47 | 44 | 33 | 32 | 26 | 25 | 21 | 46 | 43 | 33 | 32 | 26 | 25 | 21 | 32 | 31 | 25 | 25 | 21 | 25 | 25 | 21 | 19 | | | | | |
| | 0.6 | 65 | 59 | 50 | 48 | 42 | 40 | 35 | 63 | 58 | 50 | 47 | 41 | 40 | 35 | 48 | 46 | 41 | 40 | 35 | 40 | 39 | 35 | 33 | | | | | |
| | 0.8 | 75 | 68 | 60 | 57 | 51 | 49 | 43 | 72 | 66 | 59 | 56 | 50 | 48 | 43 | 57 | 54 | 49 | 48 | 43 | 48 | 47 | 43 | 41 | | | | | |
| | 1 | 84 | 75 | 70 | 65 | 60 | 57 | 51 | 81 | 73 | 68 | 64 | 59 | 57 | 51 | 66 | 62 | 58 | 56 | 51 | 56 | 55 | 51 | 48 | | | | | |
| | 1.25 | 92 | 82 | 79 | 72 | 70 | 65 | 60 | 89 | 80 | 77 | 72 | 69 | 65 | 60 | 74 | 70 | 67 | 64 | 59 | 65 | 63 | 59 | 57 | | | | | |
| | 1.5 | 97 | 85 | 85 | 77 | 76 | 70 | 65 | 94 | 84 | 83 | 76 | 74 | 70 | 65 | 79 | 74 | 72 | 69 | 64 | 70 | 68 | 64 | 61 | | | | | |
| | 2 | 105 | 91 | 94 | 84 | 86 | 78 | 73 | 101 | 89 | 91 | 83 | 84 | 77 | 73 | 87 | 81 | 81 | 76 | 72 | 78 | 75 | 71 | 69 | | | | | |
| | 2.5 | 110 | 95 | 101 | 89 | 93 | 84 | 80 | 106 | 93 | 98 | 88 | 91 | 83 | 79 | 93 | 86 | 87 | 82 | 78 | 84 | 80 | 77 | 75 | | | | | |
| | 3 | 113 | 97 | 105 | 92 | 98 | 87 | 83 | 109 | 96 | 102 | 91 | 96 | 87 | 83 | 96 | 89 | 91 | 85 | 82 | 87 | 84 | 81 | 78 | | | | | |
| | 4 | 117 | 100 | 111 | 96 | 105 | 92 | 89 | 113 | 98 | 107 | 95 | 102 | 91 | 88 | 101 | 93 | 97 | 90 | 87 | 92 | 88 | 86 | 83 | | | | | |
| 5 | 120 | 102 | 115 | 98 | 110 | 95 | 93 | 116 | 100 | 111 | 97 | 107 | 95 | 92 | 104 | 95 | 101 | 93 | 90 | 96 | 91 | 89 | 86 | | | | | | |
| 7 | 123 | 104 | 119 | 101 | 115 | 99 | 97 | 119 | 102 | 115 | 100 | 112 | 98 | 96 | 108 | 98 | 105 | 96 | 95 | 100 | 94 | 93 | 90 | | | | | | |
| 10 | 126 | 105 | 123 | 104 | 120 | 102 | 100 | 121 | 104 | 119 | 102 | 116 | 101 | 99 | 111 | 100 | 109 | 99 | 98 | 103 | 97 | 96 | 93 | | | | | | |

配光曲線

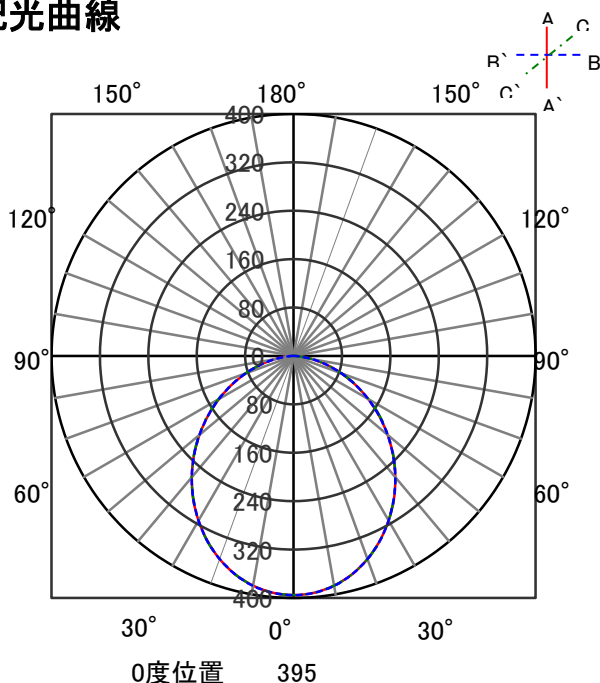

直射水平面照度

