


## ECOHiLUX照明器具 配光データシート

意匠図

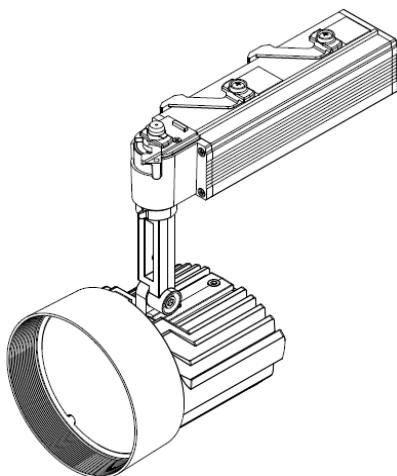


器具品名	スポットライト	保守率	
		良	0.78
器具品番	SP24W-25MUB		中 0.74
	-		否 0.70
部品品名	-		器具効率
	-		
部品品番	-		上方向 0%
	-		下方向 100%
器具光束	2880lm		全方向 100%
	-		
光源	-		
光源光束	一体型器具のため、器具光束表示		

## 照明率表

反射率	天井	作業面照明率(×0.01)																
		80				70				50				30				
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	10	
室 指 数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
	0.4	56	52	45	44	40	39	35	55	52	45	44	39	39	35	44	38	35
	0.6	73	67	62	59	56	54	51	71	66	62	59	55	54	51	60	58	54
	0.8	83	75	72	68	66	63	59	81	74	71	67	65	63	59	70	66	64
	1	89	80	79	73	72	69	65	87	79	78	73	72	68	65	76	69	67
	1.25	95	84	86	78	79	74	71	92	83	84	78	78	74	71	81	77	73
	1.5	99	87	90	82	84	78	74	96	86	88	81	82	77	74	85	80	78
	2	104	90	96	86	90	83	80	101	89	94	85	89	82	79	90	84	86
	2.5	107	92	101	89	95	86	83	104	91	98	88	93	85	83	93	86	90
	3	109	94	104	91	99	88	86	106	93	101	90	97	87	85	96	88	92
4	112	96	108	93	104	91	89	109	95	105	92	101	91	89	99	91	96	89
	5	114	97	111	95	107	93	92	111	96	107	94	104	93	91	101	92	99
	7	117	98	114	97	111	96	95	113	97	110	96	108	95	94	104	94	102
	10	118	99	117	98	115	98	97	114	98	113	97	111	97	96	106	95	104

## 配光曲線

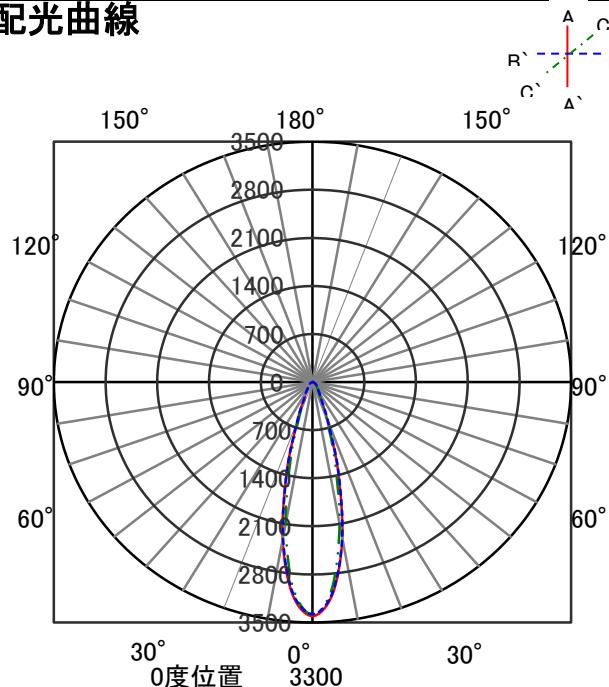

## 直射水平面照度

