


ECOHiLUX照明器具 配光データシート

意匠図


|      |                 |      |      |
|------|-----------------|------|------|
| 器具品名 | ダウンライト          | 保守率  |      |
| 器具品番 | DL20WW-60UCB-D  | 良    | 0.78 |
| 部品品名 | -               | 中    | 0.74 |
| 部品品番 | -               | 否    | 0.70 |
| 器具光束 | 1710lm          | 器具効率 |      |
| 光源   | -               | 上方向  | 0%   |
| 光源光束 | 一体型器具のため、器具光束表示 | 下方向  | 100% |
|      |                 | 全方向  | 100% |

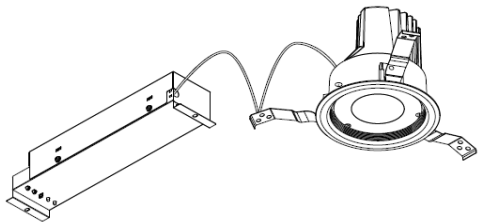

照明率表

| 作業面照明率(×0.01) |        |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |     |    |     |    |    |
|---------------|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|----|-----|----|----|
| 反<br>射<br>率   | 天井     | 80  |     |     |     |     |     |     |     | 70  |     |     |     |     |     |     |     | 50  |     |     |     |     |    | 30  |    |     |    | 0  |
|               | 壁<br>床 | 70  |     | 50  |     | 30  |     | 10  |     | 70  |     | 50  |     | 30  |     | 10  |     | 50  |     | 30  |     | 10  |    | 30  |    | 10  |    | 0  |
| 室<br>指<br>数   | 0.4    | 59  | 55  | 47  | 46  | 41  | 40  | 36  | 58  | 55  | 47  | 45  | 41  | 40  | 36  | 46  | 45  | 40  | 40  | 36  | 40  | 39  | 36 | 35  | 36 | 35  | 36 | 35 |
|               | 0.6    | 80  | 74  | 69  | 66  | 62  | 60  | 57  | 79  | 73  | 68  | 65  | 62  | 60  | 57  | 67  | 64  | 61  | 60  | 56  | 60  | 59  | 56 | 55  | 56 | 55  | 56 | 55 |
|               | 0.8    | 88  | 80  | 76  | 72  | 69  | 66  | 62  | 86  | 79  | 75  | 71  | 68  | 66  | 62  | 73  | 70  | 67  | 65  | 62  | 66  | 65  | 62 | 60  | 62 | 60  | 62 | 60 |
|               | 1      | 96  | 86  | 85  | 79  | 78  | 74  | 70  | 94  | 85  | 84  | 78  | 77  | 73  | 70  | 81  | 77  | 75  | 73  | 69  | 74  | 72  | 69 | 67  | 69 | 67  | 69 | 67 |
|               | 1.25   | 103 | 92  | 94  | 86  | 87  | 82  | 78  | 101 | 91  | 92  | 85  | 86  | 81  | 78  | 89  | 84  | 84  | 80  | 77  | 82  | 79  | 77 | 75  | 77 | 75  | 77 | 75 |
|               | 1.5    | 107 | 94  | 97  | 88  | 91  | 84  | 81  | 104 | 93  | 96  | 88  | 89  | 84  | 80  | 92  | 86  | 87  | 83  | 80  | 84  | 82  | 79 | 77  | 79 | 77  | 79 | 77 |
|               | 2      | 112 | 98  | 104 | 93  | 98  | 89  | 86  | 109 | 96  | 102 | 92  | 96  | 89  | 86  | 98  | 91  | 93  | 88  | 85  | 90  | 87  | 84 | 82  | 84 | 82  | 84 | 82 |
|               | 2.5    | 116 | 100 | 110 | 97  | 104 | 94  | 91  | 113 | 99  | 107 | 96  | 102 | 93  | 91  | 102 | 94  | 98  | 92  | 90  | 94  | 91  | 89 | 87  | 89 | 87  | 89 | 87 |
|               | 3      | 119 | 102 | 113 | 99  | 108 | 96  | 94  | 115 | 101 | 110 | 98  | 105 | 95  | 93  | 104 | 96  | 101 | 94  | 92  | 97  | 92  | 91 | 89  | 91 | 89  | 91 | 89 |
|               | 4      | 122 | 104 | 117 | 101 | 113 | 99  | 97  | 118 | 102 | 114 | 100 | 110 | 98  | 96  | 107 | 98  | 105 | 97  | 95  | 100 | 95  | 94 | 91  | 94 | 91  | 94 | 91 |
|               | 5      | 124 | 105 | 120 | 103 | 116 | 101 | 100 | 120 | 104 | 116 | 102 | 113 | 100 | 99  | 110 | 100 | 107 | 99  | 97  | 102 | 97  | 96 | 93  | 96 | 93  | 96 | 93 |
|               | 7      | 126 | 106 | 123 | 105 | 121 | 104 | 102 | 122 | 105 | 119 | 104 | 117 | 103 | 101 | 112 | 102 | 110 | 101 | 100 | 104 | 99  | 98 | 96  | 98 | 96  | 98 | 96 |
| 10            | 128    | 107 | 126 | 106 | 124 | 105 | 104 | 123 | 106 | 122 | 105 | 120 | 104 | 104 | 114 | 103 | 113 | 102 | 102 | 106 | 100 | 100 | 97 | 100 | 97 | 100 | 97 |    |

配光曲線

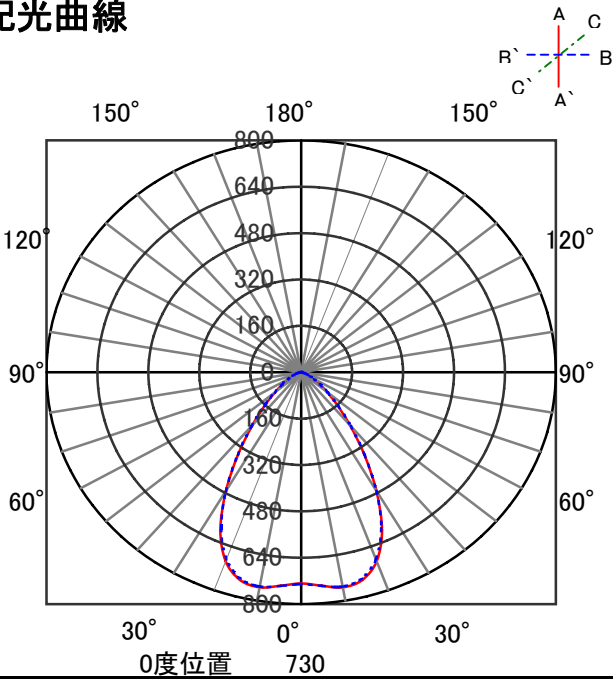

直射水平面照度

