


ECOHiLUX照明器具 配光データシート

意匠図


| | | | |
|------|-----------------|------|------|
| 器具品名 | 冷ケース用照明 | 保守率 | |
| 器具品番 | LDG7T・MM/4/RC/C | 良 | 0.69 |
| 部品品名 | - | 中 | 0.67 |
| 部品品番 | - | 否 | 0.63 |
| 器具光束 | 400lm | 器具効率 | |
| 光源 | LED | 上方向 | 5% |
| 光源光束 | 400lm | 下方向 | 95% |
| | | 全方向 | 100% |

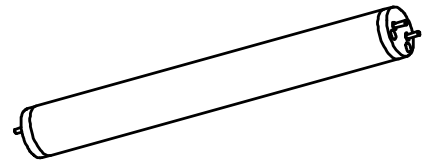

照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|------|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|----|----|-----|----|-----|----|----|----|----|----|----|----|---|
| 反射率 | 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | 30 | | 0 | |
| | | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | 50 | | 30 | | 10 | | 50 | 30 | | 10 | | 30 | 10 | |
| 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 |
| 室指数 | 0.4 | 43 | 41 | 30 | 29 | 22 | 22 | 17 | 42 | 39 | 29 | 28 | 22 | 21 | 17 | 28 | 27 | 21 | 21 | 17 | 20 | 20 | 16 | 14 | |
| | 0.6 | 59 | 55 | 44 | 42 | 35 | 34 | 29 | 57 | 53 | 43 | 41 | 35 | 34 | 29 | 41 | 40 | 34 | 33 | 28 | 33 | 32 | 28 | 25 | |
| | 0.8 | 69 | 63 | 54 | 51 | 44 | 42 | 36 | 67 | 61 | 52 | 50 | 43 | 42 | 36 | 50 | 47 | 42 | 40 | 35 | 40 | 39 | 34 | 32 | |
| | 1 | 78 | 70 | 63 | 58 | 53 | 50 | 44 | 75 | 68 | 61 | 57 | 51 | 49 | 43 | 57 | 55 | 49 | 48 | 42 | 47 | 46 | 41 | 38 | |
| | 1.25 | 86 | 76 | 72 | 66 | 62 | 58 | 52 | 82 | 74 | 69 | 64 | 60 | 57 | 51 | 65 | 62 | 58 | 55 | 50 | 55 | 53 | 49 | 46 | |
| | 1.5 | 91 | 80 | 78 | 70 | 68 | 63 | 57 | 87 | 78 | 75 | 69 | 66 | 62 | 56 | 70 | 66 | 63 | 60 | 55 | 60 | 58 | 53 | 50 | |
| | 2 | 99 | 86 | 87 | 78 | 78 | 71 | 65 | 95 | 84 | 84 | 76 | 75 | 70 | 64 | 78 | 73 | 71 | 67 | 63 | 68 | 65 | 61 | 57 | |
| | 2.5 | 104 | 90 | 94 | 83 | 85 | 77 | 71 | 100 | 88 | 90 | 81 | 83 | 75 | 70 | 84 | 78 | 78 | 73 | 69 | 74 | 71 | 67 | 63 | |
| | 3 | 108 | 93 | 98 | 86 | 90 | 81 | 76 | 103 | 90 | 95 | 84 | 88 | 79 | 75 | 88 | 81 | 82 | 77 | 73 | 77 | 74 | 71 | 67 | |
| | 4 | 113 | 96 | 105 | 91 | 98 | 86 | 82 | 108 | 94 | 101 | 89 | 95 | 85 | 81 | 93 | 85 | 88 | 82 | 78 | 83 | 79 | 76 | 72 | |
| 5 | 116 | 98 | 109 | 94 | 103 | 90 | 86 | 111 | 96 | 105 | 92 | 99 | 88 | 85 | 97 | 88 | 93 | 85 | 82 | 87 | 82 | 80 | 75 | | |
| 7 | 119 | 100 | 114 | 97 | 109 | 94 | 91 | 114 | 98 | 110 | 95 | 105 | 92 | 90 | 101 | 92 | 98 | 89 | 87 | 91 | 86 | 84 | 80 | | |
| 10 | 122 | 102 | 118 | 100 | 115 | 98 | 95 | 117 | 100 | 113 | 98 | 110 | 96 | 94 | 104 | 94 | 102 | 93 | 91 | 95 | 89 | 88 | 83 | | |

配光曲線

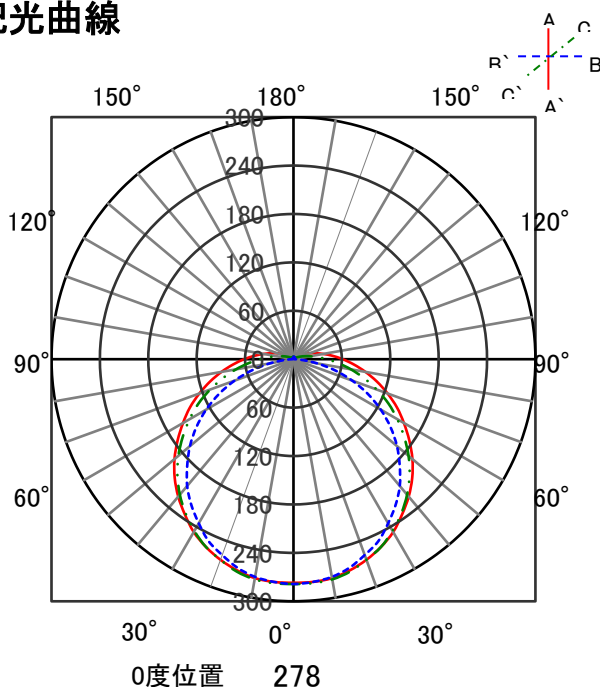

直射水平面照度

