


ECOHiLUX照明器具 配光データシート


器具品名	ローグレアユニバーサル ダウンライト	保守率	
器具品番	UV15VG-10L5W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1570lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

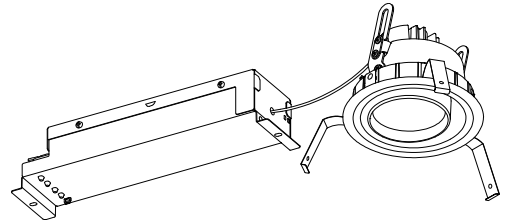

照明率表

作業面照明率(×0.01)																												
反射率	天井	80								70								50						30				0
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0
床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	0	
室 指 数	0.4	66	62	56	54	50	49	45	65	61	55	53	49	48	45	54	53	49	48	45	49	48	45	44				
	0.6	85	79	75	71	68	66	63	84	78	74	71	68	66	63	73	70	67	66	63	67	65	63	61				
	0.8	95	87	85	80	79	76	72	94	86	84	80	78	75	72	82	79	77	75	72	76	74	72	70				
	1	102	91	92	86	86	81	78	100	90	91	85	85	81	78	89	84	83	80	78	82	80	77	76				
	1.25	108	96	99	91	92	87	84	105	94	97	90	91	86	84	94	89	89	86	83	87	85	83	81				
	1.5	111	98	103	93	97	90	87	108	97	101	93	96	89	87	97	91	93	89	86	91	88	86	84				
	2	116	101	109	97	103	94	92	113	100	106	97	101	94	91	102	95	98	93	91	95	92	90	88				
	2.5	119	103	113	100	108	97	95	116	102	110	99	106	97	95	105	97	102	95	94	98	94	93	91				
	3	121	104	116	102	111	99	97	118	103	113	101	109	99	97	108	99	104	97	96	100	96	95	93				
	4	124	106	120	104	116	102	101	120	105	117	103	113	102	100	111	101	108	100	99	103	98	97	95				
	5	126	107	123	105	120	104	103	122	106	119	104	116	103	102	113	103	111	102	101	105	100	99	97				
	7	128	108	126	107	124	106	106	124	107	122	106	120	105	105	115	104	113	104	103	108	102	101	99				
10	130	109	129	108	127	108	108	126	108	124	107	123	107	107	117	105	116	105	105	109	103	103	100					

配光曲線

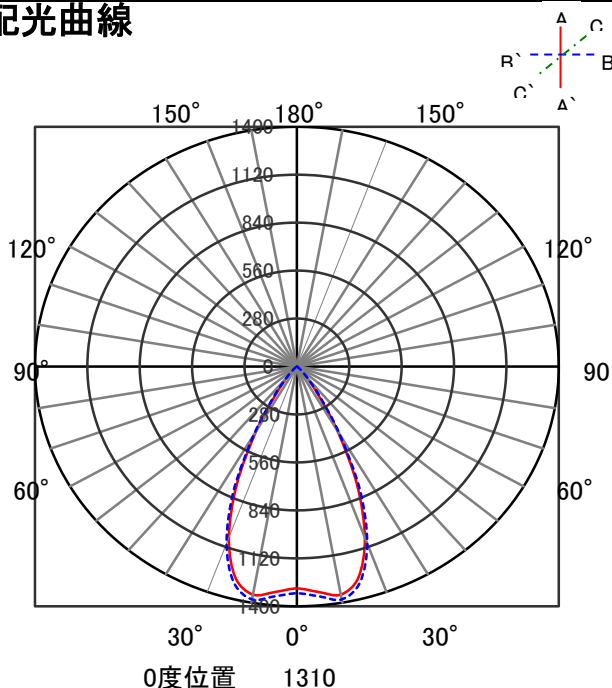

直射水平面照度

