


ECOHiLUX照明器具 配光データシート


|      |                 |      |      |
|------|-----------------|------|------|
| 器具品名 | LEDスポットライトMiOL  | 保守率  |      |
| 器具品番 | SPC20W8-GMW     | 良    | 0.69 |
| 部品品名 | -               | 中    | 0.67 |
| 部品品番 | -               | 否    | 0.63 |
| 器具光束 | 1800 lm         | 器具効率 |      |
| 光源   | -               | 上方向  | 0%   |
| 光源光束 | 一体型器具のため、器具光束表示 | 下方向  | 100% |
|      |                 | 全方向  | 100% |

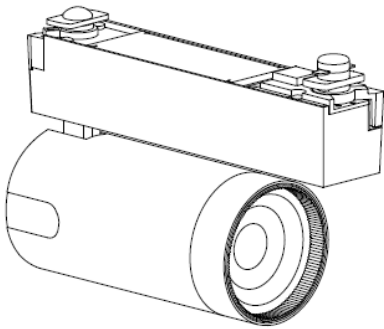

照明率表

| 作業面照明率(×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |
|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 反射率(%)        | 天井  | 80  |     |     |     |     |     |     |     | 70  |     |     |     |     |     |     |     | 50  |     |     |     |     |     | 0   |
|               | 壁   | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |     |     | 50  |     |     | 30  |     |     | 0   |
|               | 床   | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 0   |
| 室<br>指<br>数   | 0.4 | 67  | 63  | 56  | 54  | 49  | 48  | 45  | 66  | 62  | 55  | 53  | 49  | 48  | 45  | 54  | 53  | 49  | 48  | 45  | 49  | 48  | 45  | 44  |
|               | 0.6 | 86  | 79  | 75  | 71  | 69  | 66  | 63  | 85  | 78  | 74  | 71  | 68  | 66  | 63  | 73  | 70  | 67  | 66  | 63  | 67  | 65  | 63  | 61  |
|               | 0.8 | 97  | 88  | 86  | 81  | 79  | 76  | 73  | 95  | 87  | 85  | 80  | 79  | 76  | 73  | 83  | 79  | 78  | 75  | 72  | 77  | 75  | 72  | 71  |
|               | 1   | 103 | 93  | 93  | 87  | 87  | 82  | 79  | 101 | 92  | 92  | 86  | 86  | 82  | 79  | 89  | 85  | 84  | 81  | 78  | 83  | 80  | 78  | 76  |
|               | 1.3 | 109 | 97  | 100 | 92  | 94  | 88  | 85  | 107 | 96  | 98  | 91  | 92  | 87  | 84  | 95  | 90  | 90  | 87  | 84  | 88  | 86  | 83  | 82  |
|               | 1.5 | 113 | 100 | 105 | 95  | 98  | 91  | 88  | 110 | 99  | 103 | 94  | 97  | 91  | 88  | 99  | 93  | 94  | 90  | 87  | 92  | 89  | 87  | 85  |
|               | 2   | 118 | 103 | 111 | 99  | 105 | 96  | 93  | 115 | 102 | 108 | 98  | 103 | 95  | 93  | 104 | 97  | 100 | 94  | 92  | 97  | 93  | 91  | 89  |
|               | 2.5 | 122 | 105 | 115 | 102 | 110 | 99  | 97  | 118 | 104 | 112 | 101 | 108 | 98  | 96  | 107 | 99  | 104 | 97  | 95  | 100 | 96  | 94  | 92  |
|               | 3   | 124 | 106 | 118 | 104 | 113 | 101 | 99  | 120 | 105 | 115 | 103 | 111 | 101 | 99  | 110 | 101 | 106 | 99  | 97  | 102 | 98  | 96  | 94  |
|               | 4   | 127 | 108 | 123 | 106 | 119 | 104 | 103 | 123 | 107 | 119 | 105 | 116 | 103 | 102 | 113 | 103 | 110 | 102 | 101 | 105 | 100 | 99  | 97  |
|               | 5   | 129 | 109 | 125 | 108 | 122 | 106 | 105 | 125 | 108 | 122 | 107 | 119 | 105 | 104 | 115 | 105 | 113 | 104 | 103 | 107 | 102 | 101 | 99  |
|               | 7   | 131 | 110 | 129 | 109 | 126 | 109 | 108 | 127 | 109 | 125 | 108 | 123 | 108 | 107 | 117 | 106 | 116 | 106 | 105 | 110 | 104 | 104 | 101 |
|               | 10  | 133 | 111 | 131 | 111 | 130 | 110 | 110 | 128 | 110 | 127 | 110 | 126 | 109 | 109 | 119 | 108 | 118 | 107 | 107 | 112 | 105 | 105 | 102 |

配光曲線

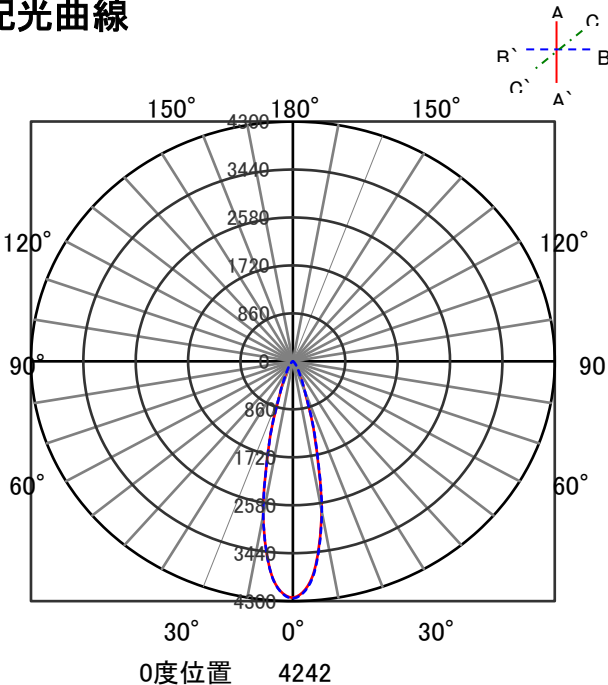

直射水平面照度

