


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDグリッド天井用照明器具	保守率	
器具品番	IRLDGS-532W-640L	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	5300lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

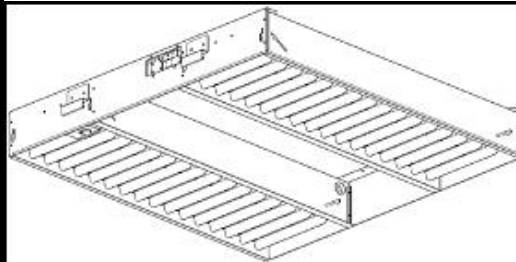

照明率表

反射率	天井	80								70				50				30				0		
		壁	70		50		30		10	70		50		30		10	30		10	0	0			
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	30	10	10	0	0	
室 指 数	0.4	50	47	37	36	30	29	25	49	46	37	35	29	29	25	36	35	29	29	25	29	28	25	23
	0.6	69	64	56	53	47	46	41	68	63	55	52	47	46	41	53	51	46	45	41	46	45	41	39
	0.8	79	72	65	61	57	54	49	77	71	64	61	56	54	49	62	59	55	53	49	54	53	48	46
	1	88	79	75	69	66	63	57	86	78	73	69	65	62	57	71	67	64	61	57	62	61	56	54
	1.25	96	86	84	77	76	71	66	94	84	83	76	75	71	66	79	75	73	70	65	71	69	65	63
	1.5	101	89	90	81	81	75	70	98	88	88	80	80	75	70	84	79	77	74	70	75	73	69	67
	2	108	94	98	88	90	82	78	105	93	96	87	89	82	78	91	85	85	80	77	82	79	76	74
	2.5	113	97	104	92	97	88	84	109	96	102	91	95	87	83	96	89	91	85	82	88	84	81	79
	3	116	99	108	95	102	91	87	112	98	105	94	99	90	87	99	92	95	88	85	91	87	84	82
	4	120	102	114	98	108	95	92	116	100	110	97	105	94	91	104	95	100	92	90	95	91	88	86
5	122	103	117	100	112	98	95	118	102	113	99	109	97	94	106	97	103	95	93	98	93	91	89	
7	125	105	121	103	117	101	99	121	104	117	102	114	100	98	110	99	107	98	96	101	96	95	92	
10	127	107	124	105	121	103	102	123	105	120	104	117	102	101	112	101	110	100	99	104	98	97	94	

配光曲線

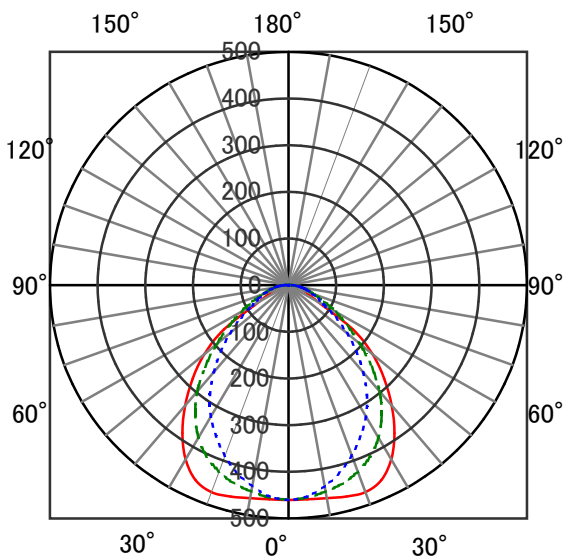

直射水平面照度

