


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	高天井用LED照明	保守率	
器具品番	IRLDRCL210N-120BS-HE	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	18800lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

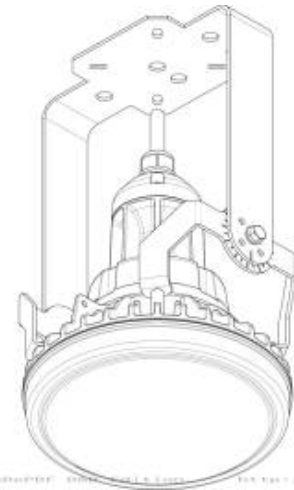

照明率表

		作業面照明率(×0.01)																							
反射率	天井	80								70				50				30		0					
		壁		70		50		30		10		70		50		30		10		30		10		0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0	0
室 指 数	0.4	46	43	32	31	25	24	20	44	42	32	31	25	24	20	31	30	24	24	20	24	24	20	18	
	0.6	63	58	49	47	40	39	34	61	57	48	46	40	39	34	47	45	39	38	34	39	38	34	32	
	0.8	74	67	59	55	50	48	42	71	65	58	55	49	47	42	56	53	48	47	42	47	46	41	39	
	1	82	74	68	63	59	56	50	80	72	67	63	58	55	50	64	61	57	55	50	55	54	49	47	
	1.25	91	81	78	71	69	64	59	88	79	76	70	68	64	59	73	69	66	63	58	64	62	58	55	
	1.5	96	84	84	76	75	69	64	93	83	82	75	73	69	64	78	73	71	68	63	69	66	62	60	
	2	103	90	93	83	84	77	72	100	88	90	82	83	76	72	86	80	80	75	71	77	74	70	68	
	2.5	109	94	99	88	92	83	78	105	92	97	87	90	82	78	91	85	86	81	77	82	79	76	73	
	3	112	96	104	91	97	86	82	108	94	101	90	94	85	82	95	87	90	84	81	86	82	80	77	
	4	116	99	109	95	104	91	88	112	97	106	94	101	90	87	100	91	96	88	86	91	87	84	82	
5	119	101	113	97	108	94	91	115	99	110	96	105	93	91	103	94	99	91	89	94	90	88	85		
7	122	103	118	100	114	98	96	118	101	114	99	110	97	95	107	97	104	95	93	98	93	91	89		
10	125	104	121	102	118	101	99	120	103	117	101	114	100	98	109	99	107	97	96	101	95	94	91		

配光曲線

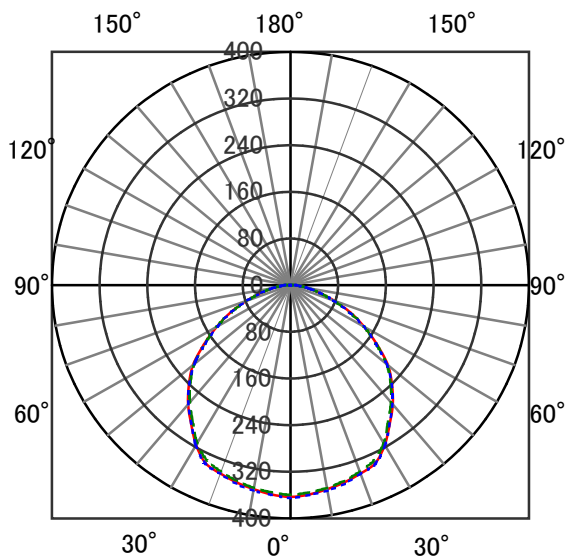

直射水平面照度

