

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDライン照明	保守率	
器具品番	LS060L30-V1	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	475lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%



照明率表

		作業面照明率(×0.01)																										
反射率	天井	80								70				50				30				0						
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0
床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	46	43	32	31	25	24	20	45	42	32	31	25	24	20	31	30	24	24	20	24	24	20	24	24	20	18	
	0.6	63	58	49	47	40	39	34	62	57	48	46	40	39	34	47	45	39	38	34	39	38	34	39	38	34	32	
	0.8	74	67	59	55	50	47	42	71	65	58	55	49	47	42	56	53	48	46	41	47	46	41	47	46	41	39	
	1	82	74	68	63	59	56	50	80	72	67	62	58	55	50	64	61	56	54	49	55	53	49	55	53	49	47	
	1.25	91	80	78	71	68	64	58	88	79	76	70	67	63	58	73	68	65	62	58	63	61	57	63	61	57	55	
	1.5	96	84	83	76	74	69	63	92	83	81	75	73	68	63	78	73	70	67	62	68	66	62	68	66	62	59	
	2	103	90	92	83	84	77	71	100	88	90	81	82	76	71	85	79	79	74	70	76	73	70	76	73	70	67	
	2.5	109	94	99	87	91	82	78	105	92	96	86	89	81	77	91	84	85	80	76	82	79	75	82	79	75	73	
	3	112	96	103	90	96	86	82	108	94	100	89	94	85	81	95	87	90	83	80	86	82	79	86	82	79	76	
	4	116	99	109	95	103	91	87	112	97	106	93	100	90	87	100	91	95	88	85	91	86	84	91	86	84	81	
5	119	101	113	97	108	94	91	115	99	109	96	105	93	90	103	94	99	91	89	94	89	87	94	89	87	85		
7	122	103	118	100	114	98	95	118	101	114	99	110	97	94	107	97	104	95	93	98	93	91	98	93	91	88		
10	125	104	122	102	118	101	99	120	103	117	101	114	100	98	109	99	107	97	96	101	95	94	94	94	94	91		

配光曲線

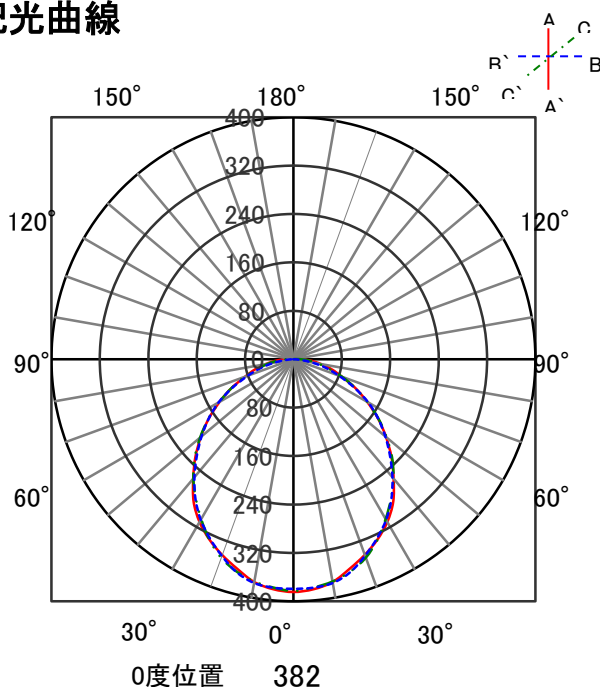

直射水平面照度

