


ECOHiLUX照明器具 配光データシート

意匠図


|      |                 |      |      |
|------|-----------------|------|------|
| 器具品名 | 角型投光器           | 保守率  |      |
| 器具品番 | IRLDSP25N-W-BK  | 良    | -    |
| 部品品名 | -               | 中    | -    |
| 部品品番 | -               | 否    | -    |
| 器具光束 | 2300lm          | 器具効率 |      |
| 光源   | LED             | 上方向  | 0%   |
| 光源光束 | 一体型器具のため、器具光束表示 | 下方向  | 100% |
|      |                 | 全方向  | 100% |

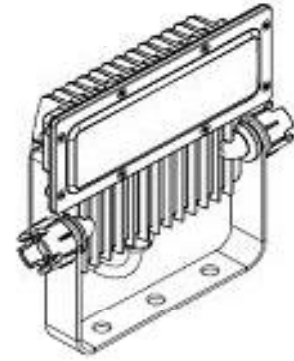

照明率表

| 作業面照明率(×0.01) |      |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |
|---------------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
| 反射率           | 天井   | 80  |     |     |     |     |     |     |     | 70  |     |     |     | 50  |     |     | 30  |     |     | 0   |     |     |     |    |
|               |      | 壁   | 70  |     | 50  |     | 30  |     | 10  | 70  |     | 50  |     | 30  |     | 10  | 30  |     | 10  | 0   |     |     |     |    |
|               | 床    | 30  | 10  | 30  | 10  | 30  | 10  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 10  | 30  | 10  | 30  | 10  | 10  | 0   |     |     |    |
| 室<br>指<br>数   | 0.4  | 57  | 54  | 44  | 43  | 37  | 36  | 32  | 56  | 53  | 44  | 42  | 37  | 36  | 32  | 43  | 42  | 36  | 36  | 32  | 36  | 35  | 32  | 30 |
|               | 0.6  | 79  | 72  | 65  | 62  | 57  | 56  | 51  | 77  | 71  | 65  | 62  | 57  | 55  | 51  | 63  | 61  | 56  | 55  | 51  | 56  | 55  | 51  | 49 |
|               | 0.8  | 88  | 80  | 75  | 70  | 66  | 63  | 58  | 86  | 78  | 73  | 69  | 65  | 63  | 58  | 71  | 68  | 64  | 62  | 58  | 63  | 62  | 58  | 56 |
|               | 1    | 97  | 87  | 84  | 78  | 76  | 72  | 67  | 94  | 85  | 83  | 77  | 75  | 71  | 67  | 80  | 76  | 73  | 70  | 66  | 72  | 70  | 66  | 64 |
|               | 1.25 | 105 | 93  | 94  | 86  | 86  | 80  | 76  | 102 | 92  | 92  | 85  | 84  | 80  | 76  | 89  | 83  | 82  | 79  | 75  | 80  | 78  | 74  | 72 |
|               | 1.5  | 109 | 96  | 98  | 89  | 90  | 84  | 80  | 106 | 95  | 96  | 88  | 89  | 83  | 79  | 93  | 87  | 86  | 82  | 79  | 84  | 81  | 78  | 76 |
|               | 2    | 116 | 101 | 107 | 95  | 99  | 91  | 87  | 112 | 99  | 104 | 94  | 97  | 90  | 86  | 99  | 92  | 94  | 89  | 85  | 91  | 87  | 84  | 82 |
|               | 2.5  | 121 | 104 | 113 | 100 | 106 | 96  | 92  | 117 | 103 | 110 | 98  | 104 | 95  | 92  | 104 | 96  | 100 | 93  | 91  | 96  | 92  | 89  | 87 |
|               | 3    | 124 | 106 | 116 | 102 | 110 | 98  | 95  | 119 | 105 | 113 | 101 | 108 | 97  | 95  | 107 | 99  | 103 | 96  | 93  | 99  | 94  | 92  | 90 |
|               | 4    | 127 | 108 | 121 | 105 | 116 | 102 | 99  | 123 | 107 | 118 | 104 | 113 | 101 | 99  | 111 | 102 | 108 | 99  | 97  | 103 | 98  | 96  | 93 |
| 5             | 130  | 110 | 125 | 107 | 120 | 105 | 102 | 125 | 108 | 121 | 106 | 117 | 104 | 102 | 114 | 104 | 111 | 102 | 100 | 105 | 100 | 99  | 96  |    |
| 7             | 132  | 111 | 129 | 109 | 125 | 108 | 106 | 128 | 110 | 124 | 108 | 121 | 106 | 105 | 117 | 106 | 114 | 104 | 103 | 108 | 103 | 101 | 99  |    |
| 10            | 134  | 112 | 132 | 111 | 129 | 110 | 108 | 130 | 111 | 127 | 110 | 125 | 109 | 107 | 119 | 107 | 117 | 106 | 105 | 111 | 104 | 104 | 101 |    |

配光曲線

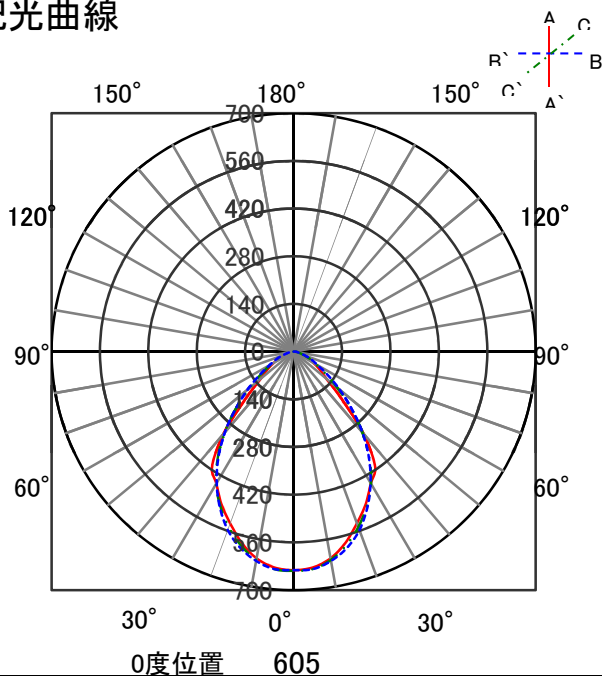

直射水平面照度

