


# ECOHiLUX照明器具 配光データシート

## 意匠図


|      |                      |      |      |
|------|----------------------|------|------|
| 器具品名 | LEDダウンライト<br>COBシリーズ | 保守率  |      |
| 器具品番 | UV20L30-30C2W-D      | 良    | 0.69 |
| 部品品名 | -                    | 中    | 0.67 |
| 部品品番 | -                    | 否    | 0.63 |
| 器具光束 | 1900lm               | 器具効率 |      |
| 光源   | -                    | 上方向  | 0%   |
| 光源光束 | 一体型器具のため、器具光束表示      | 下方向  | 100% |
|      |                      | 全方向  | 100% |

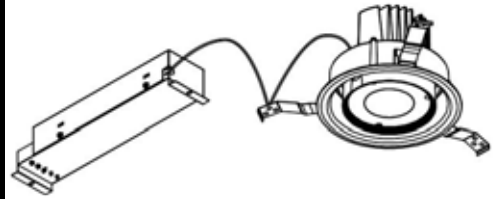

## 照明率表

| 反射率  | 天井  | 80  |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |
|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|
|      |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |     | 0   |     |     |     |     |     |    |
|      |     | 70  | 50  | 30  | 10  | 0   | 70  | 50  | 30  | 10  | 0   | 70  | 50  | 30  | 10  | 0   | 70  | 50  | 30  | 10  | 0   |     |    |
| 0.4  | 60  | 56  | 48  | 47  | 42  | 41  | 37  | 59  | 56  | 48  | 46  | 42  | 41  | 37  | 47  | 46  | 41  | 41  | 37  | 41  | 40  | 37  | 36 |
| 0.6  | 79  | 72  | 67  | 63  | 60  | 58  | 54  | 77  | 71  | 66  | 63  | 59  | 58  | 54  | 65  | 62  | 58  | 57  | 54  | 58  | 57  | 53  | 52 |
| 0.8  | 89  | 81  | 78  | 73  | 70  | 68  | 64  | 87  | 80  | 77  | 72  | 70  | 67  | 63  | 75  | 71  | 69  | 67  | 63  | 68  | 66  | 63  | 61 |
| 1    | 97  | 87  | 86  | 79  | 78  | 74  | 70  | 94  | 85  | 84  | 79  | 77  | 74  | 70  | 82  | 77  | 76  | 73  | 70  | 74  | 72  | 69  | 68 |
| 1.25 | 103 | 92  | 93  | 85  | 86  | 80  | 77  | 100 | 90  | 91  | 84  | 85  | 80  | 76  | 88  | 83  | 83  | 79  | 76  | 81  | 78  | 75  | 74 |
| 1.5  | 107 | 95  | 98  | 89  | 91  | 84  | 81  | 104 | 93  | 96  | 88  | 90  | 84  | 80  | 92  | 87  | 87  | 83  | 80  | 85  | 82  | 79  | 77 |
| 2    | 113 | 98  | 105 | 94  | 99  | 90  | 87  | 110 | 97  | 103 | 93  | 97  | 89  | 86  | 98  | 91  | 93  | 88  | 85  | 90  | 87  | 85  | 83 |
| 2.5  | 117 | 101 | 110 | 97  | 104 | 94  | 91  | 113 | 100 | 107 | 96  | 102 | 93  | 90  | 102 | 94  | 98  | 92  | 89  | 94  | 90  | 88  | 86 |
| 3    | 120 | 102 | 113 | 99  | 108 | 96  | 94  | 116 | 101 | 110 | 98  | 106 | 96  | 93  | 105 | 96  | 101 | 94  | 92  | 97  | 93  | 91  | 89 |
| 4    | 123 | 105 | 118 | 102 | 114 | 100 | 98  | 119 | 103 | 115 | 101 | 111 | 99  | 97  | 108 | 99  | 105 | 97  | 96  | 101 | 96  | 94  | 92 |
| 5    | 125 | 106 | 121 | 104 | 117 | 102 | 100 | 121 | 105 | 117 | 103 | 114 | 101 | 100 | 111 | 101 | 108 | 99  | 98  | 103 | 98  | 97  | 94 |
| 7    | 128 | 107 | 125 | 106 | 122 | 105 | 103 | 123 | 106 | 121 | 105 | 118 | 104 | 103 | 113 | 103 | 112 | 102 | 101 | 106 | 100 | 99  | 97 |
| 10   | 129 | 108 | 127 | 107 | 126 | 107 | 106 | 125 | 107 | 123 | 106 | 121 | 106 | 105 | 115 | 104 | 114 | 104 | 103 | 108 | 102 | 101 | 99 |

## 配光曲線

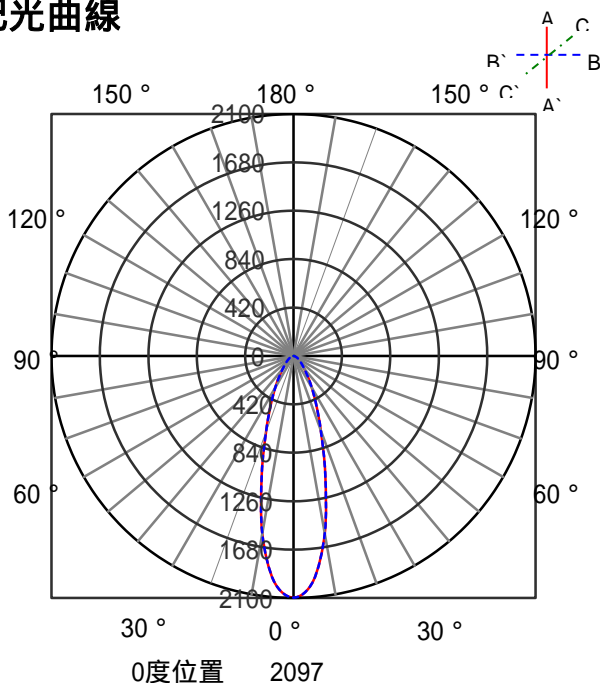

## 直射水平面照度

