


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	角型投光器	保守率	
器具品番	IRLDSP25L2-N-BK	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	2250lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

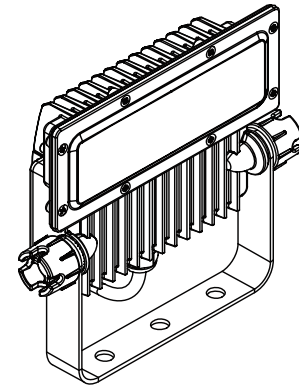

照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70				50				30				0							
	壁	70	10	30	10	30	10	10	30	70	10	30	10	30	10	10	50	10	30	10	30	10	10	30	10	10	30	10	10
室 指 数	0.4	60	56	48	47	42	41	37	59	55	48	46	42	41	37	47	46	41	41	37	41	40	37	36					
	0.6	78	72	67	63	59	58	54	77	71	66	63	59	57	54	64	62	58	57	53	58	57	53	52					
	0.8	89	81	78	73	70	67	63	87	80	77	72	70	67	63	75	71	69	67	63	68	66	63	61					
	1	96	86	85	79	78	74	70	94	85	84	79	77	74	70	82	77	76	73	69	74	72	69	67					
	1.25	103	91	93	85	85	80	76	100	90	91	84	84	80	76	88	83	82	79	76	80	78	75	73					
	1.5	107	94	98	89	91	84	81	104	93	96	88	89	84	80	92	86	87	83	80	84	82	79	77					
	2	113	98	105	93	98	90	86	109	97	102	92	96	89	86	98	91	93	88	85	90	87	84	82					
	2.5	116	100	109	97	103	93	90	113	99	107	96	101	92	90	101	94	97	91	89	94	90	88	86					
	3	119	102	113	99	107	96	93	115	101	110	98	105	95	93	104	96	100	93	91	96	92	90	88					
	4	122	104	117	101	113	99	97	118	103	114	100	110	98	96	108	98	105	97	95	100	95	94	91					
5	124	105	120	103	116	101	100	120	104	117	102	113	100	99	110	100	107	99	97	102	97	96	93						
7	127	107	124	105	121	104	103	122	105	120	104	117	103	102	113	102	111	101	100	105	99	98	96						
10	129	108	127	107	125	106	105	124	106	122	106	121	105	104	115	103	113	103	102	107	101	100	98						

配光曲線

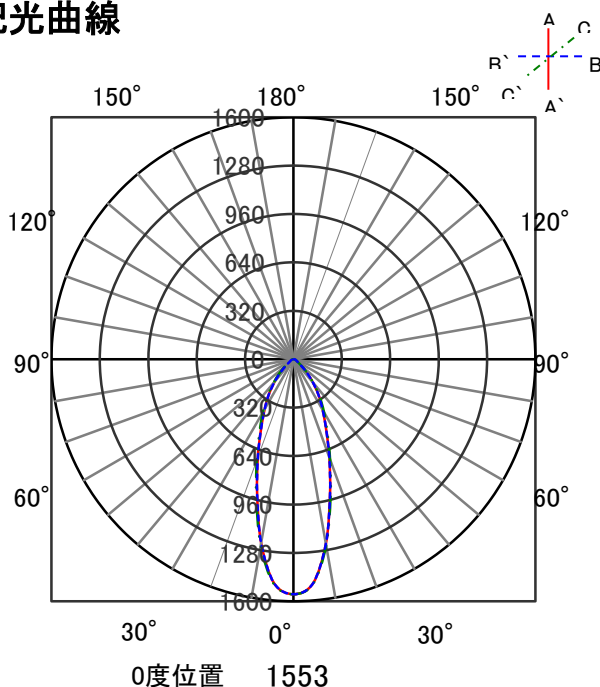

直射水平面照度

