


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ハイパワーLED照明 (RZシリーズ)	保守率	
器具品番	LDR125N-E39/110	良	-
部品品名	-	中	-
部品品番	-	否	-
器具光束	20000lm	器具効率	
光源	LED	上方向	
光源光束	一体型器具のため、器具光束表示	下方向	
		全方向	

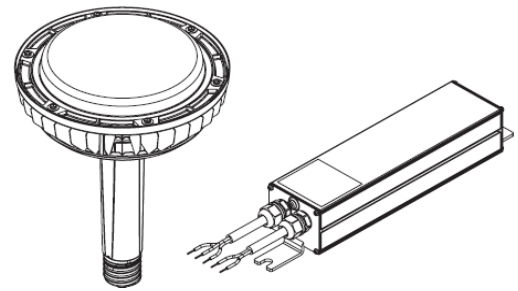

照明率表

反射率		作業面照明率(×0.01)																																					
		天井				80				70				50				30				0																	
		壁	床	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	10	30	10	10	30	10	10	30	10	10	30	10	10	30	10	10	30	10	10	30
室 指 数	0.4	46	44	33	32	25	25	20	45	43	32	31	25	25	20	31	30	25	24	20	24	24	20	20	18														
	0.6	65	59	50	48	41	40	35	63	58	49	47	41	40	35	48	46	40	39	35	39	39	34	32															
	0.8	76	69	61	57	52	49	44	73	67	60	56	51	49	44	58	55	50	48	43	49	48	43	41															
	1	85	76	71	66	61	58	53	82	74	69	65	60	58	52	66	63	59	57	52	57	56	51	49															
	1.25	93	83	81	74	71	67	62	90	81	79	73	70	66	61	75	71	68	65	61	66	64	60	58															
	1.5	99	87	87	79	78	72	67	95	85	85	78	76	72	67	81	76	74	70	66	71	69	65	63															
	2	106	93	96	86	88	80	76	103	91	93	85	86	80	75	89	83	83	78	74	80	77	73	71															
	2.5	112	96	103	91	95	86	82	108	95	100	90	93	85	81	94	87	89	84	80	85	82	79	76															
	3	115	99	107	94	100	90	86	111	97	104	93	98	89	85	98	90	93	87	84	89	85	83	80															
	4	119	101	113	98	107	94	91	115	100	109	96	104	93	90	103	94	99	91	89	94	89	87	84															
5	122	103	116	100	112	97	95	117	102	113	99	108	96	94	106	96	102	94	92	97	92	90	87																
7	125	105	121	103	117	101	99	120	103	117	101	113	99	98	109	99	107	97	96	100	95	94	91																
10	127	106	124	105	121	103	102	122	105	120	103	117	102	101	112	101	110	100	99	103	98	97	93																

配光曲線

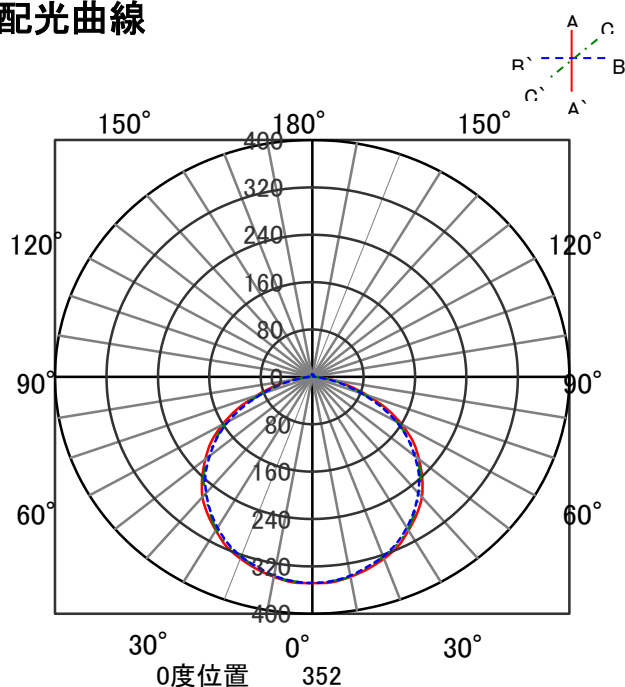

直射水平面照度

