


# ECOHiLUX照明器具 配光データシート

## 意匠図


|      |  |      |      |
|------|--|------|------|
| 器具品名 | LEDダウンライト<br>LAシリーズ                    | 保守率  |      |
| 器具品番 | DL42L308-20A6W-D<br>DL42L308-20A6W-DLS | 良    | 0.67 |
| 部品品名 | -                                      | 中    | 0.63 |
| 部品品番 | -                                      | 否    | 0.56 |
|      |  | 器具効率 |      |
| 器具光束 | 3292lm                                 | 上方向  | 0%   |
| 光源   | -                                      | 下方向  | 100% |
| 光源光束 | 一体型器具のため、器具光束表示                        | 全方向  | 100% |

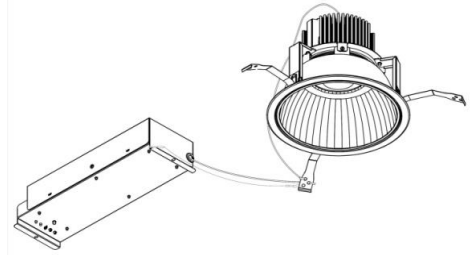

## 照明率表

|             |      | 作業面照明率(×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |    |   |
|-------------|------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|---|
| 反射率         | 天井   | 80            |     |     |     |     |     |     |     | 70  |     |     |     |     |     |     |     | 50  |     |     |     | 30  |    |    |    | 0 |
|             |      | 70            |     | 50  |     | 30  |     | 10  | 70  |     | 50  |     | 30  |     | 10  | 50  |     | 30  |     | 10  | 30  | 10  | 0  |    |    |   |
|             | 壁    | 30            | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 0  |    |   |
| 室<br>指<br>数 | 床    | 0.4           | 62  | 58  | 50  | 49  | 44  | 43  | 40  | 61  | 57  | 50  | 48  | 44  | 43  | 40  | 49  | 48  | 44  | 43  | 40  | 43  | 43 | 40 | 38 |   |
|             | 0.6  | 81            | 74  | 69  | 66  | 63  | 61  | 57  | 79  | 73  | 69  | 65  | 62  | 60  | 57  | 67  | 65  | 61  | 60  | 57  | 61  | 60  | 57 | 55 |    |   |
|             | 0.8  | 91            | 83  | 81  | 76  | 74  | 71  | 67  | 90  | 82  | 80  | 75  | 73  | 70  | 67  | 78  | 74  | 72  | 70  | 67  | 71  | 69  | 66 | 65 |    |   |
|             | 1    | 98            | 88  | 88  | 82  | 81  | 77  | 74  | 96  | 87  | 87  | 81  | 80  | 77  | 73  | 84  | 80  | 79  | 76  | 73  | 77  | 75  | 73 | 71 |    |   |
|             | 1.25 | 105           | 93  | 95  | 87  | 89  | 83  | 80  | 102 | 92  | 94  | 87  | 88  | 83  | 80  | 91  | 85  | 86  | 82  | 79  | 84  | 81  | 79 | 77 |    |   |
|             | 1.5  | 109           | 96  | 100 | 91  | 94  | 87  | 84  | 106 | 95  | 98  | 90  | 92  | 86  | 83  | 95  | 89  | 90  | 86  | 83  | 87  | 85  | 82 | 81 |    |   |
|             | 2    | 114           | 99  | 107 | 95  | 101 | 92  | 89  | 111 | 98  | 104 | 94  | 99  | 91  | 89  | 100 | 93  | 96  | 90  | 88  | 93  | 89  | 87 | 85 |    |   |
|             | 2.5  | 118           | 101 | 111 | 98  | 106 | 95  | 93  | 114 | 100 | 108 | 97  | 104 | 95  | 92  | 103 | 96  | 100 | 93  | 91  | 96  | 92  | 90 | 88 |    |   |
|             | 3    | 120           | 103 | 114 | 100 | 109 | 98  | 95  | 116 | 102 | 111 | 99  | 107 | 97  | 95  | 106 | 97  | 102 | 95  | 94  | 98  | 94  | 93 | 90 |    |   |
|             | 4    | 123           | 105 | 118 | 102 | 114 | 100 | 99  | 119 | 103 | 115 | 101 | 111 | 100 | 98  | 109 | 100 | 106 | 98  | 97  | 101 | 97  | 95 | 93 |    |   |
| 5           | 125  | 106           | 121 | 104 | 118 | 102 | 101 | 121 | 105 | 117 | 103 | 114 | 101 | 100 | 111 | 101 | 109 | 100 | 99  | 103 | 98  | 97  | 95 |    |    |   |
| 7           | 127  | 107           | 124 | 106 | 122 | 105 | 104 | 123 | 106 | 120 | 105 | 118 | 104 | 103 | 113 | 103 | 111 | 102 | 101 | 106 | 100 | 99  | 97 |    |    |   |
| 10          | 129  | 108           | 127 | 107 | 125 | 106 | 106 | 124 | 107 | 123 | 106 | 121 | 105 | 105 | 115 | 104 | 114 | 103 | 103 | 107 | 101 | 101 | 98 |    |    |   |

## 配光曲線

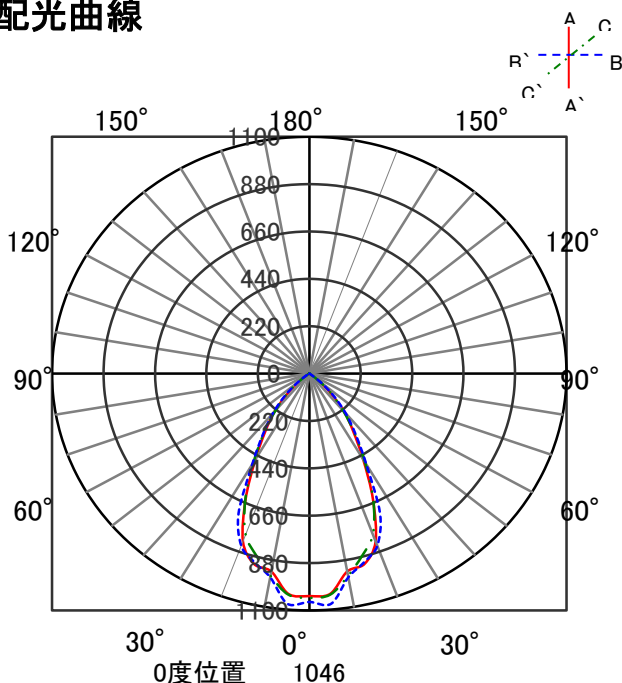

## 直射水平面照度

