


ECOHILUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
器具品番	IRLDDL30W-60D1W	良	-
部品品名	-	中	-
部品品番	-	否	-
器具光束	2760lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

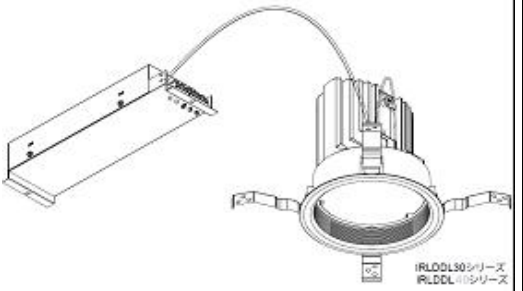

照明率表

作業面照明率(×0.01)																											
反 射 率	天井	80								70								50						30			0
	壁	70		50		30		10		70		50		30		10		50		30		10	30	10	0		
室 指 数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
	0.4	61	57	49	47	42	41	38	60	56	48	47	42	41	37	48	46	42	41	37	41	41	37	36			
	0.6	80	74	68	64	60	58	54	78	73	67	64	60	58	54	65	63	59	58	54	58	57	54	52			
	0.8	91	83	79	74	71	68	64	89	82	78	74	71	68	64	76	72	70	67	64	68	67	64	62			
	1	99	88	87	81	79	75	71	96	87	86	80	78	75	71	83	79	77	74	70	75	73	70	68			
	1.25	105	93	95	87	87	82	78	102	92	93	86	86	81	77	90	84	84	80	77	82	79	76	74			
	1.5	110	97	100	91	92	86	82	107	95	98	90	91	85	82	94	88	88	84	81	86	83	80	78			
	2	116	101	107	96	100	92	88	112	99	105	95	98	91	88	100	93	95	90	87	92	88	86	84			
	2.5	120	103	112	99	106	95	92	116	102	109	98	104	95	92	104	96	100	93	91	96	92	90	88			
	3	122	105	116	101	110	98	95	118	104	113	100	108	97	95	107	98	103	96	94	99	94	92	90			
	4	126	107	121	104	116	102	100	122	106	117	103	113	101	99	111	101	107	99	97	102	98	96	94			
	5	128	108	124	106	120	104	102	124	107	120	105	116	103	101	113	103	110	101	100	105	100	98	96			
	7	131	110	127	108	124	107	106	126	109	123	107	121	106	105	116	105	114	104	103	108	102	101	98			
	10	133	111	130	110	128	109	108	128	110	126	109	124	108	107	118	107	117	106	105	110	104	103	100			

配光曲線

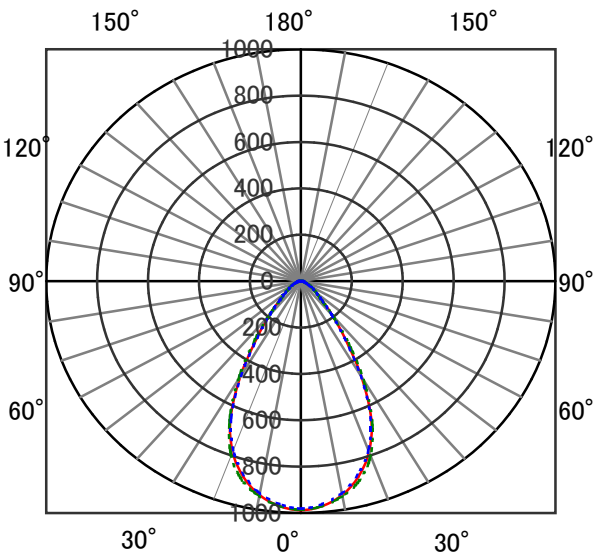

直射水平面照度

