


ECOHILUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
器具品番	IRLDDL15WW-30D1W	良	-
部品品名	-	中	-
部品品番	-	否	-
器具光束	1350lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

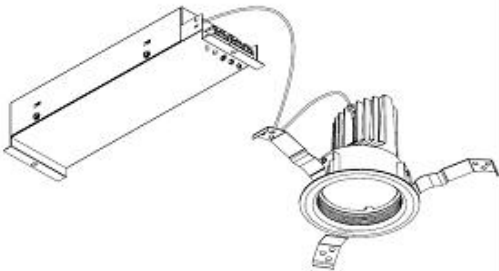

照明率表

反射率		作業面照明率(×0.01)																					
		天井				80				70				50				30				0	
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	10	30	10	0	0
室 指 数	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	0
	0.4	62	59	51	49	45	44	41	61	58	51	49	45	44	41	50	49	45	44	41	44	44	39
	0.6	81	75	70	66	63	61	57	79	74	69	66	63	61	57	68	65	62	60	57	61	60	56
	0.8	91	83	80	75	73	70	67	89	82	79	75	73	70	67	77	74	72	70	66	71	69	65
	1	98	88	88	81	81	76	73	96	87	86	81	80	76	73	84	79	78	75	72	77	75	70
	1.25	104	92	94	87	88	82	79	101	91	93	86	86	82	78	90	84	84	81	78	82	80	77
	1.5	108	95	99	90	92	86	82	105	94	97	89	91	85	82	93	88	88	84	81	86	83	81
	2	113	99	105	94	99	91	88	110	97	103	93	97	90	87	99	92	94	89	86	91	88	84
	2.5	117	101	110	97	104	94	91	113	100	107	96	102	93	91	102	94	98	92	90	95	91	89
	3	119	102	113	99	108	96	94	115	101	110	98	106	96	93	105	96	101	94	92	97	93	89
	4	123	104	118	102	113	100	98	118	103	114	101	111	99	97	108	99	105	97	96	100	96	94
	5	125	105	121	104	117	102	100	120	104	117	103	114	101	100	110	101	108	99	98	103	98	94
	7	127	107	124	106	122	104	103	123	106	120	104	118	103	103	113	102	111	102	101	105	100	99
	10	129	108	127	107	125	106	106	124	107	123	106	121	105	105	115	104	114	103	103	107	101	101

配光曲線

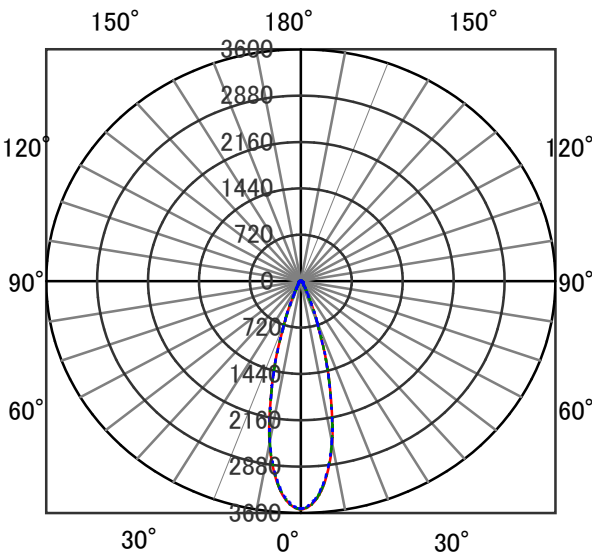

直射水平面照度

