


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
器具品番	IRLDDL6L30-30D1W	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	550lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

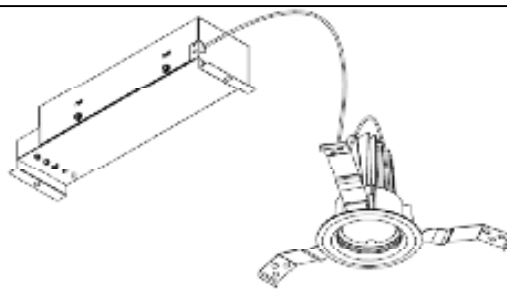

照明率表

		作業面照明率(×0.01)																						
反射率	天井 壁	80				70				50				30				0						
		70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	10	0					
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	0			
室 指 数	0.4	65	61	53	51	46	46	42	63	60	52	51	46	45	42	52	50	46	45	42	45	45	42	40
	0.6	84	77	72	68	65	63	59	82	76	71	68	65	63	59	70	67	64	62	59	63	62	59	57
	0.8	94	86	83	78	76	73	69	92	85	82	77	75	72	69	80	76	74	72	69	73	71	68	67
	1	101	91	91	84	83	79	75	99	90	89	83	82	79	75	87	82	81	78	75	79	77	74	73
	1.25	108	96	98	90	91	85	81	105	94	96	89	89	84	81	93	87	87	84	81	85	83	80	78
	1.5	112	98	102	93	95	89	85	109	97	100	92	94	88	85	97	91	91	87	84	89	86	84	82
	2	117	102	109	98	103	94	91	114	101	107	97	101	93	90	102	95	97	92	89	94	91	89	87
	2.5	121	104	114	101	108	97	95	117	103	111	100	106	97	94	106	98	102	95	93	98	94	92	90
	3	123	106	117	103	112	100	97	120	105	114	102	109	99	97	108	100	105	98	96	100	96	94	92
	4	127	108	122	105	118	103	101	123	107	118	104	115	102	101	112	102	109	101	99	104	99	98	95
5	129	109	125	107	121	106	104	125	108	121	106	118	105	103	114	104	112	103	102	106	101	100	97	
7	132	111	129	109	126	108	107	127	109	124	108	122	107	106	117	106	115	105	104	109	103	103	100	
10	134	112	132	111	130	110	109	129	110	127	110	125	109	108	119	108	118	107	107	111	105	105	102	

配光曲線

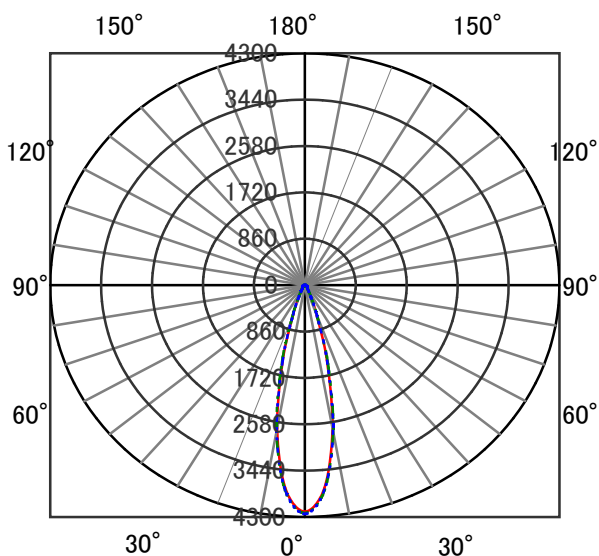

直射水平面照度

