


# ECOHiLUX照明器具 配光データシート

## 意匠図


|      |                 |      |      |
|------|-----------------|------|------|
| 器具品名 | ダウンライト          | 保守率  |      |
| 器具品番 | DL4W-50MUW-D    | 良    | 0.78 |
| 部品品名 | -               | 中    | 0.74 |
| 部品品番 | -               | 否    | 0.70 |
|      |                 | 器具効率 |      |
| 器具光束 | 520lm           | 上方向  | 0%   |
| 光源   | -               | 下方向  | 100% |
| 光源光束 | 一体型器具のため、器具光束表示 | 全方向  | 100% |

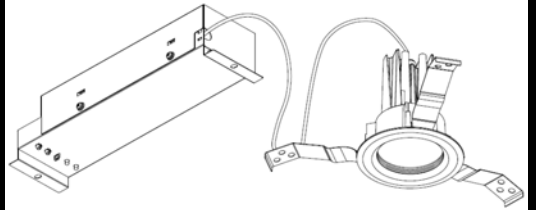

## 照明率表

| 反射率  | 天井 | 80  |    |     |    |     |    |    |     | 70 |     |    |     | 50 |    |     |    | 30  |    |    |    | 0  |    |    |    |    |    |
|------|----|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|
|      |    | 壁   |    | 70  |    | 50  |    | 30 |     | 10 |     | 70 |     | 50 |    | 30  |    | 10  |    | 50 |    | 30 |    | 10 |    | 0  |    |
|      | 床  | 30  | 10 | 30  | 10 | 30  | 10 | 30 | 10  | 30 | 10  | 30 | 10  | 30 | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 |
| 0.4  |    | 55  | 51 | 44  | 43 | 38  | 37 | 34 | 54  | 51 | 44  | 42 | 38  | 37 | 34 | 43  | 42 | 38  | 37 | 34 | 37 | 37 | 34 | 33 |    |    |    |
| 0.6  |    | 72  | 66 | 61  | 58 | 54  | 53 | 49 | 70  | 65 | 60  | 57 | 54  | 52 | 49 | 59  | 57 | 53  | 52 | 49 | 53 | 52 | 49 | 47 |    |    |    |
| 0.8  |    | 82  | 74 | 71  | 67 | 64  | 62 | 58 | 80  | 73 | 70  | 66 | 64  | 61 | 58 | 68  | 65 | 63  | 61 | 58 | 62 | 60 | 57 | 56 |    |    |    |
| 1    |    | 88  | 79 | 78  | 73 | 71  | 68 | 64 | 86  | 78 | 72  | 71 | 67  | 64 | 75 | 71  | 69 | 67  | 64 | 68 | 66 | 63 | 62 |    |    |    |    |
| 1.25 |    | 94  | 84 | 85  | 78 | 78  | 73 | 70 | 92  | 83 | 83  | 77 | 77  | 73 | 70 | 81  | 76 | 75  | 72 | 69 | 74 | 71 | 69 | 67 |    |    |    |
| 1.5  |    | 98  | 87 | 90  | 81 | 83  | 77 | 74 | 96  | 85 | 88  | 81 | 82  | 77 | 74 | 84  | 79 | 80  | 76 | 73 | 77 | 75 | 72 | 71 |    |    |    |
| 2    |    | 104 | 90 | 96  | 86 | 90  | 82 | 79 | 101 | 89 | 94  | 85 | 88  | 82 | 79 | 90  | 83 | 85  | 81 | 78 | 83 | 80 | 77 | 76 |    |    |    |
| 2.5  |    | 107 | 92 | 100 | 89 | 95  | 86 | 83 | 104 | 91 | 98  | 88 | 93  | 85 | 83 | 93  | 86 | 89  | 84 | 82 | 86 | 83 | 81 | 79 |    |    |    |
| 3    |    | 109 | 94 | 104 | 91 | 99  | 88 | 86 | 106 | 93 | 101 | 90 | 96  | 87 | 85 | 96  | 88 | 92  | 86 | 84 | 88 | 85 | 83 | 81 |    |    |    |
| 4    |    | 113 | 96 | 108 | 93 | 104 | 91 | 89 | 109 | 95 | 105 | 92 | 101 | 90 | 89 | 99  | 91 | 96  | 89 | 87 | 92 | 87 | 86 | 84 |    |    |    |
| 5    |    | 114 | 97 | 111 | 95 | 107 | 93 | 92 | 111 | 96 | 107 | 94 | 104 | 92 | 91 | 101 | 92 | 99  | 91 | 90 | 94 | 89 | 88 | 86 |    |    |    |
| 7    |    | 117 | 98 | 114 | 97 | 111 | 96 | 94 | 113 | 97 | 110 | 96 | 108 | 95 | 94 | 104 | 94 | 102 | 93 | 92 | 96 | 91 | 91 | 88 |    |    |    |
| 10   |    | 119 | 99 | 117 | 98 | 115 | 97 | 97 | 114 | 98 | 113 | 97 | 111 | 96 | 96 | 105 | 95 | 104 | 95 | 94 | 98 | 93 | 92 | 89 |    |    |    |

## 配光曲線

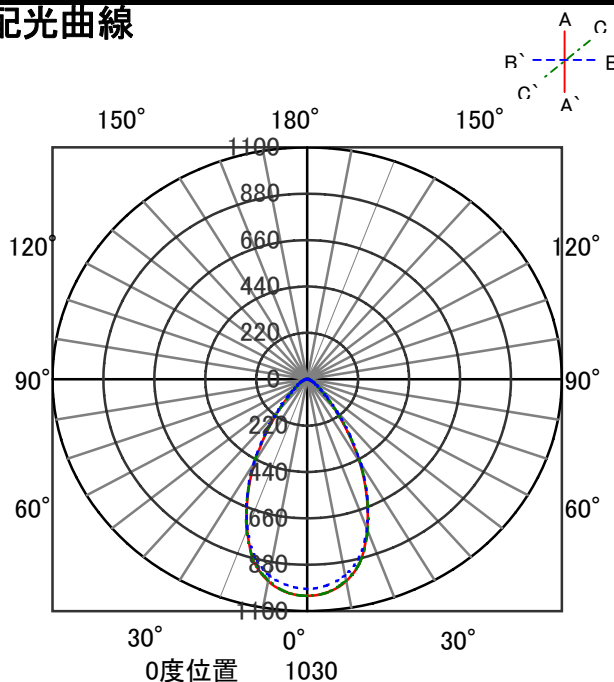

## 直射水平面照度

