


# ECOHiLUX照明器具 配光データシート

## 意匠図


|      |                 |      |      |
|------|-----------------|------|------|
| 器具品名 | ユニバーサルダウンライト    | 保守率  |      |
| 器具品番 | UV15N-30UCB-D   | 良    | 0.78 |
| 部品品名 | -               | 中    | 0.74 |
| 部品品番 | -               | 否    | 0.70 |
| 器具光束 | 1440            | 器具効率 |      |
| 光源   | -               | 上方向  | 0%   |
| 光源光束 | 一体型器具のため、器具光束表示 | 下方向  | 100% |
|      |                 | 全方向  | 100% |

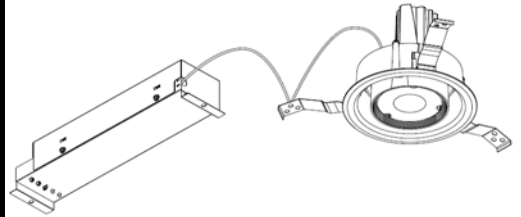

## 照明率表

|             |              | 作業面照明率(×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-------------|--------------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 反射率         | 天井<br>壁<br>床 | 80            |     |     |     |     |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 0   |    |    |
|             |              | 70            | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 30  | 10  | 30  | 10  | 10  | 0   |    |    |
| 室<br>指<br>数 | 0.4          | 60            | 57  | 49  | 47  | 42  | 41  | 38  | 59  | 56  | 48  | 47  | 42  | 41  | 38  | 47  | 46  | 42  | 41  | 38  | 41  | 41  | 38 | 36 |
|             | 0.6          | 79            | 73  | 67  | 64  | 60  | 58  | 54  | 77  | 72  | 66  | 63  | 60  | 58  | 54  | 65  | 63  | 59  | 58  | 54  | 58  | 57  | 54 | 53 |
|             | 0.8          | 90            | 82  | 78  | 74  | 71  | 68  | 64  | 88  | 80  | 77  | 73  | 71  | 68  | 64  | 75  | 72  | 69  | 67  | 64  | 68  | 67  | 64 | 62 |
|             | 1            | 97            | 87  | 86  | 80  | 79  | 75  | 71  | 95  | 86  | 85  | 79  | 78  | 74  | 71  | 82  | 78  | 76  | 74  | 70  | 75  | 73  | 70 | 68 |
|             | 1.25         | 103           | 92  | 93  | 86  | 86  | 81  | 77  | 101 | 91  | 92  | 85  | 85  | 81  | 77  | 89  | 84  | 83  | 80  | 77  | 81  | 79  | 76 | 74 |
|             | 1.5          | 108           | 95  | 98  | 89  | 91  | 85  | 81  | 105 | 94  | 96  | 89  | 90  | 84  | 81  | 93  | 87  | 88  | 83  | 80  | 85  | 82  | 80 | 78 |
|             | 2            | 113           | 99  | 105 | 94  | 99  | 90  | 87  | 110 | 97  | 103 | 93  | 97  | 90  | 87  | 99  | 92  | 94  | 89  | 86  | 91  | 87  | 85 | 83 |
|             | 2.5          | 117           | 101 | 110 | 97  | 104 | 94  | 91  | 114 | 100 | 107 | 96  | 102 | 93  | 91  | 102 | 95  | 98  | 92  | 90  | 95  | 91  | 89 | 87 |
|             | 3            | 120           | 103 | 113 | 99  | 108 | 97  | 94  | 116 | 101 | 110 | 98  | 106 | 96  | 93  | 105 | 97  | 101 | 94  | 92  | 97  | 93  | 91 | 89 |
|             | 4            | 123           | 105 | 118 | 102 | 114 | 100 | 98  | 119 | 103 | 115 | 101 | 111 | 99  | 97  | 108 | 99  | 106 | 98  | 96  | 101 | 96  | 95 | 92 |
| 5           | 125          | 106           | 121 | 104 | 117 | 102 | 100 | 121 | 105 | 117 | 103 | 114 | 101 | 100 | 111 | 101 | 108 | 100 | 98  | 103 | 98  | 97  | 94 |    |
| 7           | 128          | 107           | 125 | 106 | 122 | 105 | 104 | 123 | 106 | 121 | 105 | 118 | 104 | 103 | 113 | 103 | 112 | 102 | 101 | 106 | 100 | 99  | 97 |    |
| 10          | 129          | 108           | 127 | 107 | 125 | 107 | 106 | 125 | 107 | 123 | 106 | 121 | 106 | 105 | 115 | 104 | 114 | 104 | 103 | 108 | 102 | 101 | 99 |    |

## 配光曲線

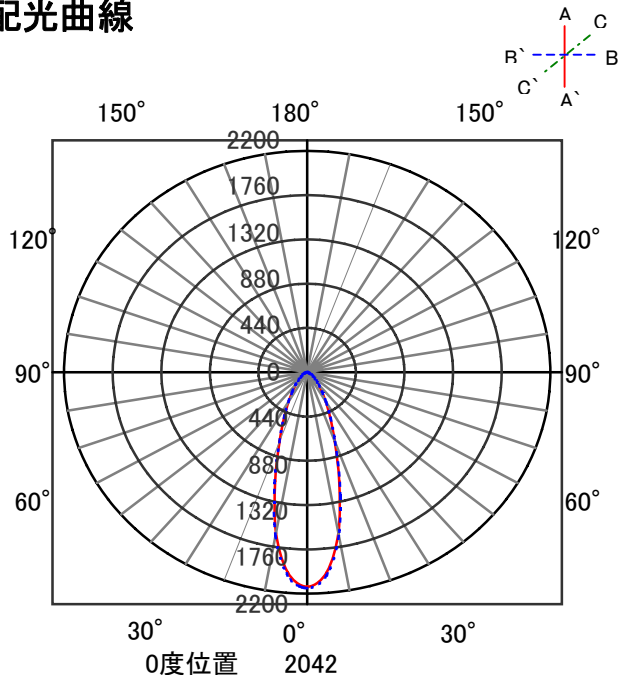

## 直射水平面照度

