


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	直管形LEDランプ 低温用防塵・防湿型専用器具	保守率	
器具品番	IRLDFL21BCLV2	良	0.69
部品品名	-	中	0.65
部品品番	-	否	0.61
		器具効率	
器具光束	900lm	上方向	0%
光源	LDG20S・N/8/10	下方向	90%
光源光束	1000lm	全方向	90%

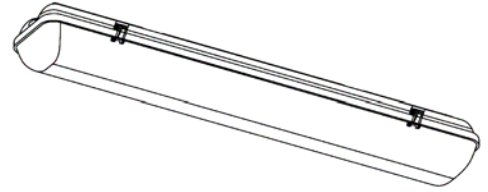

照明率表

反射率	天井	80								70				50				30		0				
		壁	70		50		30		10		70	50	30	10	50	30	10	30	10	30	10	0	0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室 指 数	0.4	39	37	27	26	20	20	15	38	36	26	25	20	19	15	25	25	19	19	15	19	19	15	14
	0.6	54	49	40	38	32	31	26	52	48	40	38	32	31	26	38	37	31	30	26	30	30	26	24
	0.8	63	57	49	46	40	38	33	60	55	48	45	39	38	33	46	44	38	37	32	37	36	32	30
	1	70	63	57	53	48	45	39	68	61	55	52	47	45	39	53	50	45	44	39	44	43	38	36
	1.25	78	69	65	59	56	52	47	75	67	63	58	55	52	46	60	57	53	51	46	51	50	45	43
	1.5	82	72	70	64	61	57	51	79	71	68	62	60	56	51	65	60	58	55	50	55	54	49	47
	2	89	78	78	70	70	64	58	86	76	76	69	68	63	58	72	67	65	62	57	63	60	56	54
	2.5	94	81	84	75	77	69	64	90	79	82	73	75	68	64	77	71	71	67	63	68	65	62	59
	3	97	83	89	78	81	72	68	93	82	86	76	79	72	67	80	74	75	70	66	71	68	65	62
	4	101	86	94	82	88	77	73	97	85	91	80	85	76	73	85	78	81	75	71	76	73	70	67
5	104	88	98	84	93	80	77	100	87	95	83	90	80	76	88	81	84	78	75	80	76	73	71	
7	108	90	103	87	98	84	82	103	89	99	86	95	83	81	92	84	89	81	79	84	79	78	75	
10	110	92	107	90	103	88	85	106	91	103	89	99	86	85	95	86	93	84	83	87	82	81	78	

配光曲線

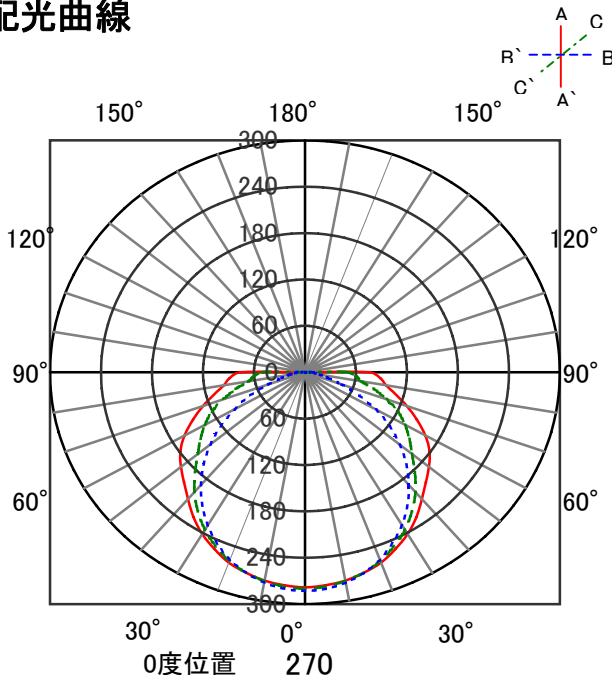

直射水平面照度

