


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト リニューアルタイプ	保守率	
器具品番	DL5W-50RP12-07W-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
器具光束	700lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

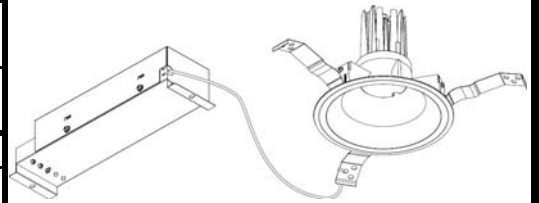

照明率表

反射率	天井	80								70								50								30								0							
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10		0											
床		30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	30	10	10	30	10	10	30	10	0											
0.4		65	61	54	52	48	47	43	64	60	53	52	47	47	43	52	51	47	46	43	47	46	43	47	46	43	42														
0.6		87	80	77	73	71	69	66	86	79	76	73	71	69	66	75	72	70	68	65	69	68	65	68	65	64															
0.8		93	85	83	78	76	73	70	91	84	82	77	76	73	69	80	76	74	72	69	73	72	69	68	65																
1		101	90	91	84	84	80	77	98	89	90	84	84	80	77	87	83	82	79	76	81	78	76	74																	
1.25		108	96	99	91	93	87	85	105	95	98	90	92	87	84	95	89	90	86	84	88	85	83	82																	
1.5		110	97	102	92	96	89	86	107	96	100	92	94	88	86	96	90	92	87	85	89	87	84	83																	
2		115	100	108	96	102	93	91	112	99	105	95	100	93	90	101	94	97	91	89	94	90	89	87																	
2.5		119	102	113	100	108	97	95	115	101	110	99	106	96	94	105	97	102	95	93	98	94	92	91																	
3		121	103	115	101	111	99	97	117	102	112	100	108	98	96	107	98	104	97	95	100	95	94	92																	
4		123	105	119	103	115	101	100	120	104	116	102	112	101	99	110	100	107	99	98	102	97	96	94																	
5		125	106	122	105	119	103	102	121	105	118	104	115	102	101	112	102	110	101	100	104	99	98	96																	
7		128	107	125	106	123	105	104	123	106	121	105	119	104	104	114	103	112	103	102	106	101	100	98																	
10		129	108	127	107	126	107	106	125	107	123	106	122	106	105	115	104	114	104	103	108	102	102	99																	

配光曲線

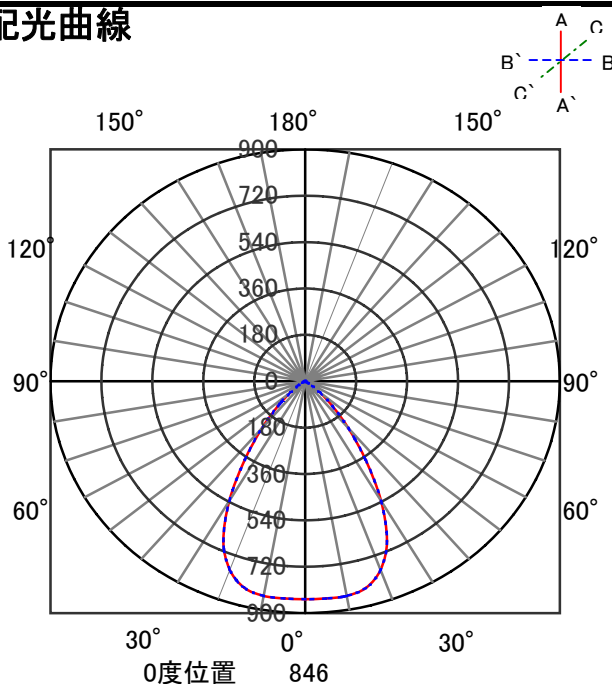

直射水平面照度

