


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯	保守率	
器具品番	IRCL5L-SQGRB-BS-P	良	0.63
部品品名	-	中	0.60
部品品番	-	否	0.56
器具光束	430lm	器具効率	
光源	LED	上方向	13%
光源光束	一体型器具のため、器具光束表示	下方向	87%
		全方向	100%

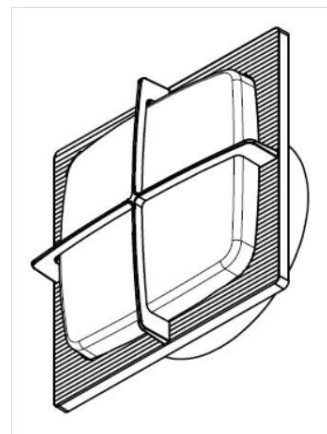

照明率表

作業面照明率(×0.01)																													
反 射 率	天井	80								70						50						30				0			
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室 指 数	0.4	44	41	31	29	23	23	18	42	40	30	29	23	22	18	28	27	22	21	17	21	20	17	14	12	10	8	6	
	0.6	60	55	45	43	37	36	30	57	53	44	42	36	35	30	41	40	34	33	29	33	32	28	25	21	18	15	12	
	0.8	70	63	55	52	45	44	38	67	61	53	50	44	43	37	50	47	42	41	36	40	39	34	31	27	23	20	17	
	1	78	70	64	59	54	51	45	75	68	61	57	52	50	44	57	54	49	48	43	47	46	41	37	33	29	25	21	
	1.25	86	77	73	67	63	59	53	82	74	70	65	61	58	52	65	61	57	55	50	54	53	48	44	39	35	31	27	
	1.5	91	81	78	71	69	64	58	87	78	75	69	67	62	57	70	65	62	59	55	59	57	53	48	44	39	35	31	
	2	99	86	88	78	78	72	66	94	83	84	76	76	70	65	77	72	71	67	62	66	64	60	55	50	46	41	37	
	2.5	104	90	94	83	86	77	72	99	87	90	81	83	76	71	83	76	77	72	68	71	69	65	60	55	50	46	41	
	3	108	92	99	86	91	81	77	102	90	94	84	87	79	75	86	79	81	75	72	75	72	69	63	59	54	50	46	
	4	112	96	105	91	98	86	82	107	93	100	88	94	84	81	91	83	87	80	77	80	76	74	68	64	59	54	50	46
	5	115	98	109	94	103	90	86	109	95	104	91	99	88	84	94	86	91	83	81	83	79	77	71	67	62	58	53	49
7	119	100	114	97	109	94	91	113	97	108	94	104	92	89	98	89	95	87	85	87	83	81	75	71	66	61	57	52	
10	122	102	118	99	114	97	95	115	99	112	97	109	95	93	102	92	99	90	89	91	86	84	78	74	68	63	58	53	

配光曲線

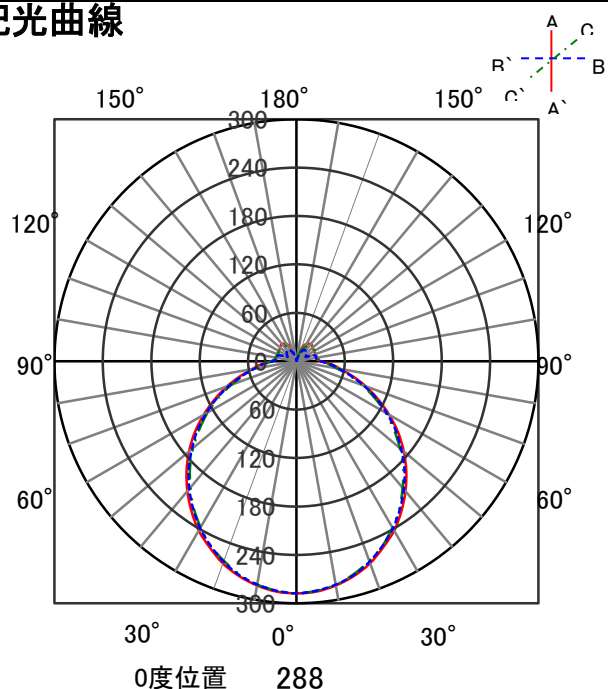

直射水平面照度

