


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDスポットライト S-tria生鮮シリーズ	保守率	
器具品番	SP18ME-25STW	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2200lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

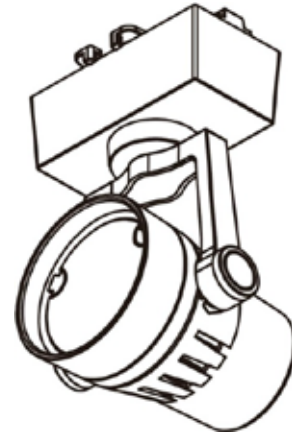

照明率表

		作業面照明率(×0.01)																												
反射率	天井	80								70								50				30				0				
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0	
室 指 数	0.4	65	61	54	52	48	47	43	64	61	54	52	47	47	43	53	51	47	46	43	47	46	43	42	42	42	42	42	42	42
	0.6	85	78	73	70	66	64	61	83	77	72	69	66	64	60	71	68	65	64	60	64	63	60	59	59	59	59	59	59	59
	0.8	95	87	84	79	77	74	70	93	86	83	79	76	74	70	81	77	75	73	70	74	73	70	68	68	68	68	68	68	68
	1	102	92	92	85	84	80	76	100	91	90	84	84	80	76	88	83	82	79	76	80	78	76	74	74	74	74	74	74	74
	1.25	108	96	99	90	92	86	83	106	95	97	90	91	86	82	94	88	88	85	82	86	84	81	80	80	80	80	80	80	80
	1.5	112	99	103	94	96	90	86	109	98	101	93	95	89	86	98	92	93	88	85	90	87	85	83	83	83	83	83	83	83
	2	118	103	110	98	104	95	92	115	101	107	97	102	94	91	103	96	98	93	90	95	92	90	88	88	88	88	88	88	88
	2.5	122	105	115	101	109	98	96	118	104	112	100	107	98	95	107	99	103	96	94	99	95	93	91	91	91	91	91	91	91
	3	124	106	118	103	113	101	98	120	105	115	102	110	100	98	109	101	106	98	97	101	97	95	93	93	93	93	93	93	93
	4	127	108	123	106	118	104	102	123	107	119	105	115	103	102	113	103	110	102	100	105	100	99	96	96	96	96	96	96	96
5	130	110	126	108	122	106	105	125	108	122	107	119	105	104	115	105	113	104	102	107	102	101	98	98	98	98	98	98	98	
7	132	111	129	110	127	109	108	127	110	125	109	123	108	107	118	107	116	106	105	110	104	104	101	101	101	101	101	101	101	
10	134	112	132	111	130	111	110	129	111	128	110	126	110	109	120	108	119	108	107	112	106	105	103	103	103	103	103	103	103	

配光曲線

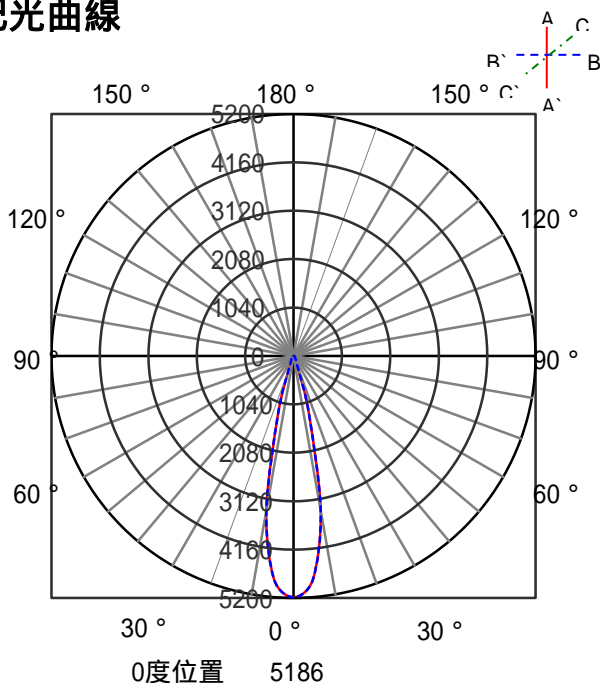

直射水平面照度

