


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDダウンライト LAシリーズ 高天井用【軒下用】	保守率	
器具品番	DL20KN8-40W9W-D-WP	良	-
部品品名	-	中	-
部品品番	-	否	-
器具光束	18750lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

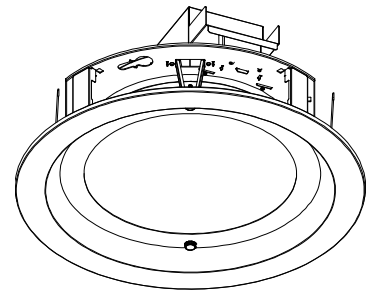

照明率表

		作業面照明率(×0.01)																						
反射率	天井 壁 床	80				70				50				30				0						
		70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0	0					
室 指 数	0.4	48	45	34	33	27	26	22	46	44	34	33	27	26	22	33	32	26	26	22	26	26	22	20
	0.6	66	61	52	50	44	42	38	64	60	51	49	43	42	37	50	48	43	42	37	42	41	37	35
	0.8	77	70	63	59	54	52	46	75	68	62	58	53	51	46	60	57	52	51	46	51	50	46	44
	1	86	77	73	67	64	60	55	83	76	71	67	63	60	55	69	65	61	59	54	60	58	54	52
	1.25	94	84	82	75	74	69	64	92	82	81	75	72	69	64	77	73	71	68	63	69	67	63	61
	1.5	99	88	88	80	79	74	69	96	86	86	79	78	73	69	82	77	76	72	68	74	71	67	65
	2	107	93	97	87	89	81	77	103	91	94	86	87	81	77	90	84	84	79	76	81	78	75	73
	2.5	112	96	103	91	96	87	83	108	95	100	90	94	86	82	95	88	90	85	81	87	83	81	78
	3	115	98	107	94	101	90	86	111	97	104	93	98	89	86	99	91	94	88	85	90	86	84	81
	4	119	101	113	97	107	94	91	115	100	109	96	104	93	91	103	94	99	92	89	94	90	88	85
5	121	103	116	100	111	97	94	117	101	112	99	108	96	94	106	96	103	94	92	97	93	91	88	
7	124	104	120	102	116	100	98	120	103	116	101	113	99	97	109	99	106	97	96	101	95	94	91	
10	126	106	123	104	120	102	101	122	104	119	103	117	101	100	111	101	109	99	98	103	97	96	94	

配光曲線

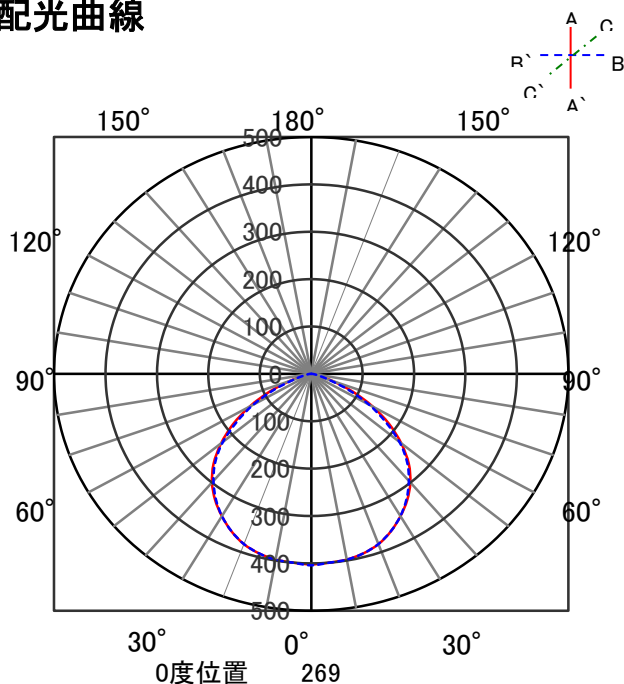

直射水平面照度

