


ECOHILUX 照明器具 配光データシート

意匠図




器具品名	LEDダウンライト COB高演色シリーズ	保守率	
		良	0.69
器具品番	SP12WW-60H2CRB	中	
		否	0.67
部品品名	-	否	
		器具効率	
器具光束	1010lm	上方向	0%
		下方向	100%
光源	-	全方向	100%
光源光束	一体型器具のため、器具光束表示		

照度率表

作業面照度率(×0.01)																0	
反射率	天井		80				70				50				30		0
	壁		70	50	30	10	70	50	30	10	70	50	30	10	30	10	0
	床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	59	55	47	45	41	40	36	58	54	47	45	41	40	36	46	35
	0.6	80	74	69	65	62	60	56	79	73	68	65	62	60	56	67	55
	0.8	88	80	76	72	69	66	62	86	79	75	71	68	66	62	73	60
	1	96	86	85	79	78	74	70	93	85	84	78	77	73	70	75	67
	1.25	103	92	94	86	87	81	78	101	91	92	85	86	81	78	89	75
	1.5	107	94	97	88	91	84	81	104	93	95	88	89	84	80	92	77
	2	112	98	104	93	98	89	86	109	96	102	92	96	89	86	98	82
	2.5	116	100	110	97	104	94	91	113	99	107	96	102	93	91	102	90
	3	119	102	113	99	108	96	94	115	101	110	98	105	95	93	104	91
	4	122	104	117	101	113	99	97	118	102	114	100	110	98	96	107	91
指 数	5	124	105	120	103	116	101	100	120	104	116	102	113	100	99	110	96
	7	126	106	123	105	120	103	102	122	105	119	104	117	103	101	112	93
	10	128	107	126	106	124	105	104	123	106	122	105	120	104	103	114	96

配光曲線

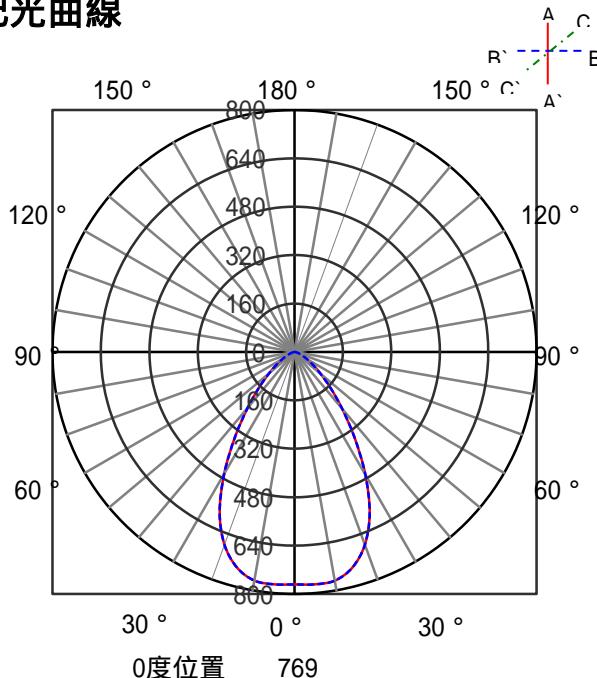

直射水平面照度

