


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ベースダウンライト	保守率	
器具品番	DL8L28-7A7BW-DA	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	696lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

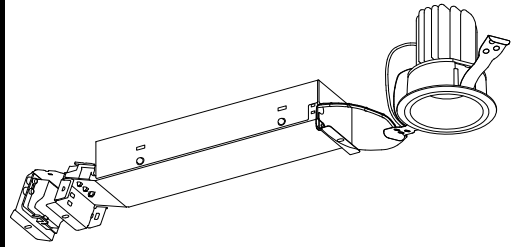

照明率表

		作業面照明率(×0.01)																													
反射率	天井	80						70						50						30						0					
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室 指 数	0.4	59	55	47	45	40	39	36	57	54	46	45	40	39	36	45	44	40	39	36	39	39	35	34	52	50					
	0.6	77	71	65	62	58	56	52	76	70	65	62	58	56	52	63	61	57	56	52	56	55	52	50	67	61					
	0.8	89	81	77	72	70	67	63	87	79	76	72	69	67	63	74	71	68	66	63	67	65	62	61	81	74					
	1	96	86	85	79	78	74	70	94	85	84	79	77	74	70	82	77	76	73	70	74	72	69	68	94	84					
	1.25	103	92	93	85	86	81	77	100	90	91	85	85	80	77	88	83	83	79	76	81	79	76	74	100	90					
	1.5	107	95	98	89	91	85	81	105	94	96	88	90	84	81	93	87	88	83	81	85	83	80	78	105	94					
	2	113	99	105	94	99	91	87	110	97	103	93	97	90	87	99	92	94	89	86	91	88	85	84	110	97					
	2.5	117	101	110	97	104	94	91	113	100	107	96	102	93	91	102	95	98	92	90	95	91	89	87	113	100					
	3	119	102	113	99	108	97	94	116	101	110	98	106	96	94	105	96	101	94	92	97	93	91	89	116	101					
	4	123	104	118	102	113	100	98	119	103	114	101	110	99	97	108	99	105	97	96	100	96	94	92	119	103					
5	124	105	120	103	117	102	100	120	104	117	102	113	101	99	110	100	108	99	98	102	97	96	94	120	104						
7	127	107	124	105	121	104	103	122	105	120	104	117	103	102	112	102	111	101	100	105	99	98	96	122	105						
10	128	107	126	106	124	106	105	124	106	122	105	120	104	104	114	103	113	103	102	106	101	100	97	124	106						

配光曲線

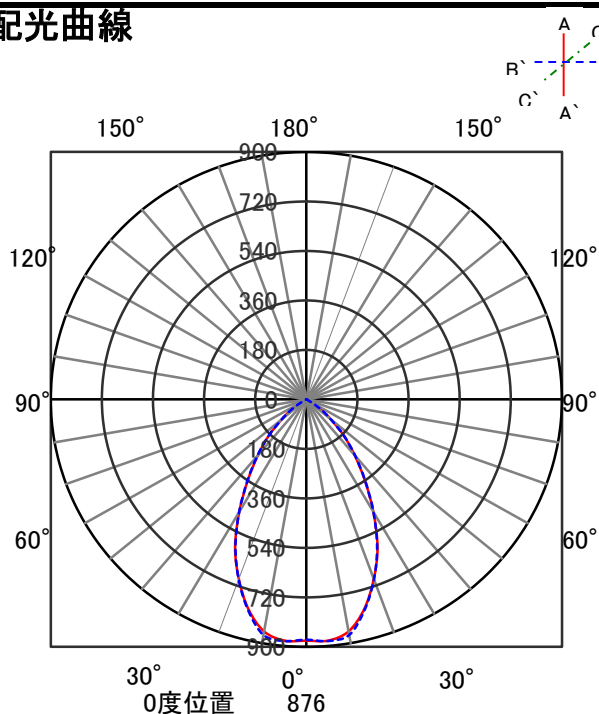

直射水平面照度

