


ECOHiLUX照明器具 配光データシート

意匠図

| | | | | | |
|------|---------------|--------|------|-----|------|
| 器具品名 | 標準グリッド照明 | | | 保守率 | |
| 器具品番 | GS-67N-642-D | | | 良 | 0.69 |
| | GS-67N-642-DA | | | 中 | 0.67 |
| | GS-67N-642-LI | | | 否 | 0.63 |
| 器具効率 | | | | | |
| 器具光束 | 6750lm | 最大取付間隔 | | 上方向 | 0% |
| 光源 | LED | AA | 1.3H | 下方向 | 100% |
| 光源光束 | - | BB | 1.3H | 全方向 | 100% |

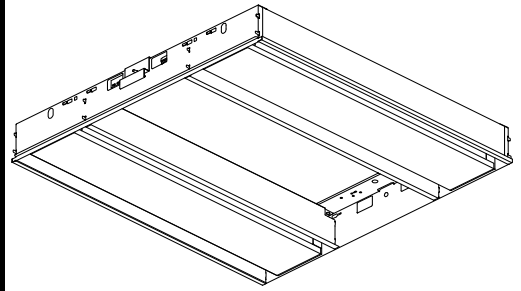


照明率表

作業面照明率(×0.01)

| 反射率(%) | 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | 30 | | | | 0 | |
|--------|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|----|----|-----|----|----|----|----|---|--|
| | | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | 50 | | 30 | | 10 | | 50 | 30 | | 10 | | 30 | 10 | | 0 | |
| 室指数 | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | |
| | 0.4 | 46 | 43 | 32 | 31 | 25 | 24 | 20 | 45 | 42 | 32 | 31 | 25 | 24 | 20 | 31 | 30 | 24 | 24 | 20 | 24 | 23 | 20 | 18 | | | |
| | 0.6 | 63 | 58 | 49 | 46 | 40 | 39 | 33 | 61 | 57 | 48 | 46 | 39 | 38 | 33 | 46 | 44 | 39 | 38 | 33 | 38 | 37 | 33 | 31 | | | |
| | 0.8 | 73 | 67 | 59 | 55 | 49 | 47 | 41 | 71 | 65 | 57 | 54 | 48 | 47 | 41 | 55 | 53 | 47 | 46 | 41 | 46 | 45 | 41 | 38 | | | |
| | 1 | 82 | 74 | 68 | 63 | 58 | 55 | 49 | 79 | 72 | 66 | 62 | 57 | 55 | 49 | 64 | 60 | 56 | 54 | 49 | 54 | 53 | 48 | 46 | | | |
| | 1.25 | 91 | 80 | 77 | 71 | 68 | 64 | 58 | 88 | 79 | 75 | 70 | 67 | 63 | 58 | 72 | 68 | 65 | 62 | 57 | 63 | 61 | 57 | 54 | | | |
| | 1.5 | 96 | 84 | 83 | 75 | 74 | 69 | 63 | 92 | 83 | 81 | 74 | 73 | 68 | 63 | 77 | 73 | 70 | 67 | 62 | 68 | 66 | 62 | 59 | | | |
| | 2 | 103 | 90 | 92 | 83 | 84 | 77 | 71 | 100 | 88 | 90 | 82 | 82 | 76 | 71 | 86 | 80 | 79 | 75 | 70 | 76 | 73 | 70 | 67 | | | |
| | 2.5 | 109 | 94 | 99 | 88 | 91 | 82 | 78 | 105 | 92 | 96 | 87 | 89 | 82 | 77 | 91 | 84 | 86 | 80 | 76 | 82 | 79 | 76 | 73 | | | |
| | 3 | 112 | 96 | 104 | 91 | 97 | 86 | 82 | 108 | 95 | 101 | 90 | 94 | 85 | 81 | 95 | 88 | 90 | 84 | 80 | 86 | 82 | 79 | 77 | | | |
| | 4 | 117 | 99 | 110 | 95 | 104 | 91 | 88 | 113 | 98 | 106 | 94 | 101 | 90 | 87 | 100 | 92 | 96 | 89 | 86 | 91 | 87 | 85 | 82 | | | |
| | 5 | 120 | 101 | 114 | 98 | 109 | 95 | 92 | 115 | 100 | 110 | 97 | 105 | 94 | 91 | 103 | 94 | 100 | 92 | 89 | 95 | 90 | 88 | 85 | | | |
| | 7 | 123 | 103 | 119 | 101 | 114 | 98 | 96 | 118 | 102 | 115 | 100 | 111 | 97 | 95 | 107 | 97 | 105 | 95 | 94 | 99 | 94 | 92 | 89 | | | |
| | 10 | 126 | 105 | 122 | 103 | 119 | 101 | 100 | 121 | 104 | 118 | 102 | 115 | 100 | 99 | 110 | 100 | 108 | 98 | 97 | 102 | 96 | 95 | 92 | | | |

配光曲線

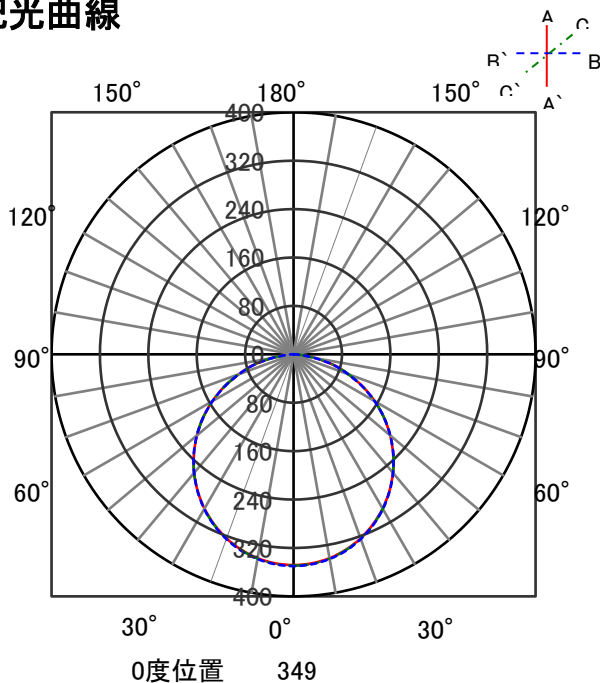

直射水平面照度

