


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	高天井RZ-Rダウンライト	保守率	
器具品番	LDRDL78N-WW-I-D	良	0.69
器具品番	LDRDL78N-WW-I-LI	中	0.67
器具品番	LDRDL78N-WW-I-LI	否	0.63
部品品番	-	器具効率	
器具光束	13700lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

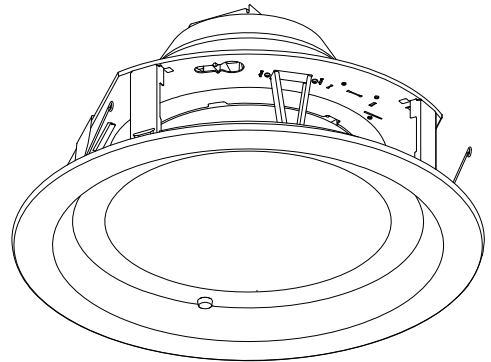


照明率表

作業面照明率(×0.01)

反射率	天井	80								70				50				30		0				
		70	10	30	10	30	10	30	10	70	10	30	10	50	10	30	10	30	10	0	0			
室 指 数	0.4	48	45	35	34	28	27	23	47	44	35	33	27	27	23	34	33	27	27	23	27	26	23	21
	0.6	67	62	53	51	45	44	39	65	61	53	50	45	43	39	51	49	44	43	38	43	42	38	37
	0.8	78	71	64	60	55	53	48	76	69	63	59	54	52	47	61	58	53	52	47	52	51	47	45
	1	87	78	74	68	65	62	56	84	77	72	68	64	61	56	70	66	63	60	56	61	60	56	54
	1.25	95	85	83	77	75	70	65	93	83	82	76	74	70	65	79	74	72	69	65	70	68	64	62
	1.5	100	88	89	81	81	75	70	97	87	87	80	80	75	70	83	78	77	73	69	75	72	69	67
	2	108	94	98	88	90	83	78	104	92	95	87	89	82	78	91	85	85	81	77	82	79	76	74
	2.5	112	97	104	92	97	88	84	109	96	101	91	95	87	84	96	89	91	86	83	88	84	82	79
	3	115	99	108	95	102	91	87	111	98	105	94	99	90	87	99	92	95	89	86	91	87	85	82
	4	119	101	113	98	108	95	92	115	100	110	97	105	94	91	104	95	100	92	90	95	91	89	86
5	122	103	117	100	112	98	95	117	102	113	99	109	97	94	106	97	103	95	93	98	93	92	89	
7	124	105	120	102	117	100	99	120	103	116	101	113	99	98	109	99	107	98	96	101	96	95	92	
10	126	106	123	104	121	103	101	122	104	119	103	117	102	100	112	101	110	100	99	103	98	97	94	

配光曲線

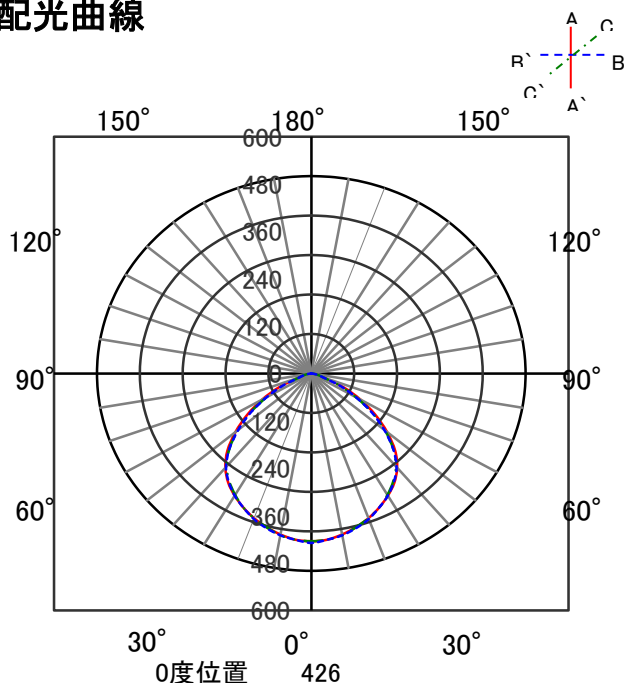

直射水平面照度

