



ECOHiLUX照明器具 配光データシート

意匠図

器具品名	高天井用LED照明 RZ-Rシリーズ E39口金タイプ	保守率	
器具品番	LDR104N-E39/110-I	良	0.69
器具品番	LDR104N-E39/110-I-LI	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	20000lm	上方向	1%
光源	LED	下方向	99%
光源光束	一体型器具のため、器具光束表示	全方向	100%

LDR104N-E39/110-I

LDR104N-E39/110-I-LI




照明率表

作業面照明率(×0.01)

反射率(%)	天井	80								70								50				30				0	
		壁	70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	0	0				
室 指 数	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
	0.4	45	43	32	31	24	24	19	44	42	31	30	24	24	19	30	29	24	23	19	23	23	19	17	17		
	0.6	63	58	48	46	39	38	33	61	56	47	45	39	38	33	46	44	38	37	32	37	37	32	30	30		
	0.8	73	66	58	55	49	47	41	71	65	57	54	48	46	41	55	52	47	46	40	46	45	40	38	38		
	1	82	74	68	63	58	55	49	79	72	66	62	57	54	49	63	60	55	54	48	54	53	48	46	46		
	1.25	90	80	77	71	68	63	58	87	79	75	70	66	63	57	72	68	64	62	57	63	61	56	54	54		
	1.5	96	84	83	75	74	68	63	92	83	81	74	72	68	63	77	72	70	67	62	68	65	61	59	59		
	2	104	90	93	83	84	77	71	100	88	90	82	82	76	71	85	79	79	74	70	76	73	69	67	67		
	2.5	109	94	99	88	91	82	78	105	92	96	87	89	82	77	91	84	85	80	76	82	79	75	73	73		
	3	112	96	104	91	97	86	82	108	95	101	90	94	85	81	95	87	90	84	80	86	82	79	76	76		
4	117	99	110	95	104	91	88	113	98	106	94	101	90	87	100	92	96	88	86	91	87	84	81	81			
5	120	101	114	98	109	95	92	115	100	110	97	105	94	91	103	94	100	92	89	94	90	88	85	85			
7	123	104	119	101	115	98	96	118	102	115	100	111	97	95	107	97	104	95	93	98	93	92	89	89			
10	126	105	122	103	119	101	100	121	104	118	102	115	100	99	110	100	108	98	97	102	96	95	92	92			

配光曲線

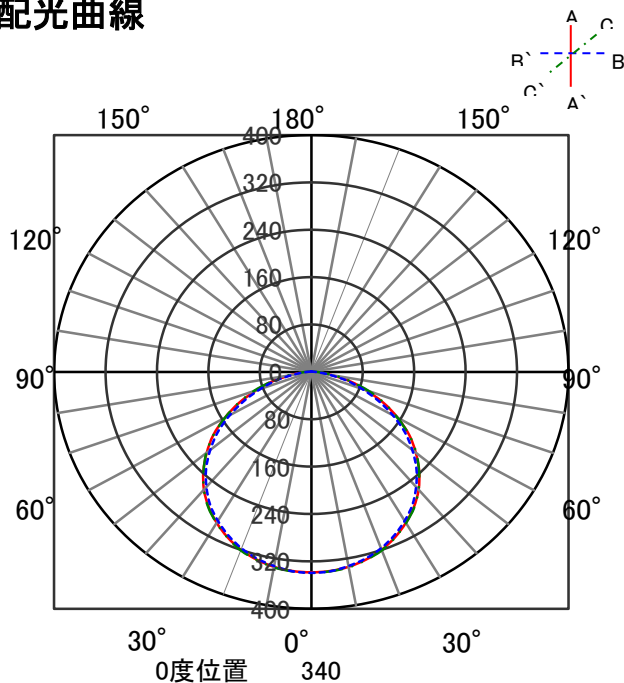

直射水平面照度

