


ECOHiLUX照明器具 配光データシート

意匠図


| | | | |
|-------|---------------------|------|--|
| 品名 | ラインルクス | 保守率 | |
| セット品番 | LX175F-46L-CH40-W90 | 良 | |
| 器具品名 | 埋込型 Cチャン回避型 | 中 | |
| 器具品番 | LXBF-CH40-W90 | 否 | |
| 器具光束 | 4680lm | 器具効率 | |
| 光源 | LXU175F-46L-40S | 上方向 | |
| 光源光束 | 4680lm | 下方向 | |
| | | 全方向 | |

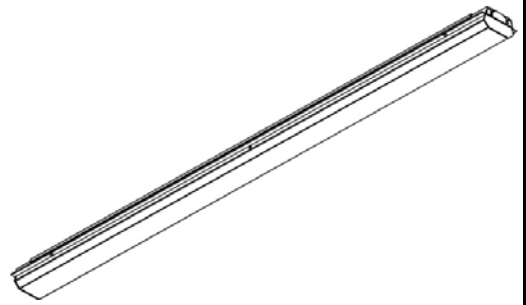

照明率表

| | | 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------|---------------|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|---|
| 反射率 | 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | 30 | | | | 0 | | | |
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 30 | | 10 | | 30 | | 10 | | 0 | |
| 床 | | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 10 | 30 | 10 | 10 | 0 |
| 室 指 数 | 0.4 | 45 | 42 | 31 | 30 | 24 | 23 | 19 | 44 | 41 | 31 | 30 | 24 | 23 | 19 | 29 | 29 | 23 | 22 | 18 | 22 | 22 | 18 | 16 | 16 | 16 | 16 | 16 | |
| | 0.6 | 62 | 57 | 47 | 45 | 38 | 37 | 32 | 60 | 55 | 46 | 44 | 38 | 37 | 31 | 44 | 42 | 36 | 36 | 31 | 35 | 35 | 30 | 28 | 28 | 28 | 28 | 28 | |
| | 0.8 | 72 | 65 | 57 | 53 | 47 | 45 | 39 | 69 | 63 | 55 | 52 | 46 | 44 | 39 | 53 | 50 | 45 | 43 | 38 | 43 | 42 | 37 | 35 | 35 | 35 | 35 | 35 | |
| | 1 | 81 | 72 | 66 | 61 | 56 | 53 | 47 | 77 | 70 | 64 | 60 | 55 | 52 | 46 | 61 | 57 | 53 | 51 | 46 | 51 | 49 | 45 | 42 | 42 | 42 | 42 | 42 | |
| | 1.25 | 89 | 79 | 75 | 69 | 65 | 61 | 55 | 85 | 77 | 73 | 67 | 64 | 60 | 55 | 69 | 65 | 61 | 59 | 53 | 59 | 57 | 52 | 49 | 49 | 49 | 49 | 49 | |
| | 1.5 | 94 | 83 | 81 | 73 | 71 | 66 | 60 | 90 | 81 | 78 | 72 | 69 | 65 | 60 | 74 | 69 | 66 | 63 | 58 | 63 | 61 | 57 | 54 | 54 | 54 | 54 | 54 | |
| | 2 | 102 | 89 | 90 | 81 | 81 | 74 | 69 | 98 | 86 | 87 | 79 | 79 | 73 | 68 | 82 | 76 | 75 | 71 | 66 | 71 | 69 | 65 | 61 | 61 | 61 | 61 | 61 | |
| | 2.5 | 107 | 93 | 97 | 86 | 89 | 80 | 75 | 103 | 90 | 94 | 84 | 86 | 79 | 74 | 87 | 81 | 81 | 76 | 72 | 77 | 74 | 70 | 67 | 67 | 67 | 67 | 67 | |
| | 3 | 111 | 95 | 102 | 89 | 94 | 84 | 79 | 106 | 93 | 98 | 87 | 91 | 82 | 78 | 91 | 84 | 86 | 80 | 76 | 81 | 77 | 74 | 70 | 70 | 70 | 70 | 70 | |
| | 4 | 115 | 98 | 108 | 93 | 101 | 89 | 85 | 110 | 96 | 104 | 92 | 98 | 88 | 84 | 96 | 88 | 92 | 85 | 82 | 86 | 82 | 79 | 75 | 75 | 75 | 75 | 75 | |
| 5 | 118 | 100 | 112 | 96 | 106 | 93 | 89 | 113 | 98 | 108 | 94 | 103 | 91 | 88 | 100 | 91 | 96 | 88 | 85 | 90 | 85 | 83 | 79 | 79 | 79 | 79 | 79 | | |
| 7 | 122 | 103 | 117 | 100 | 113 | 97 | 94 | 117 | 100 | 112 | 98 | 108 | 95 | 93 | 104 | 94 | 101 | 92 | 90 | 94 | 89 | 87 | 83 | 83 | 83 | 83 | 83 | | |
| 10 | 125 | 104 | 121 | 102 | 118 | 100 | 98 | 119 | 102 | 116 | 100 | 113 | 98 | 97 | 107 | 97 | 105 | 95 | 94 | 97 | 92 | 91 | 86 | 86 | 86 | 86 | 86 | | |

配光曲線

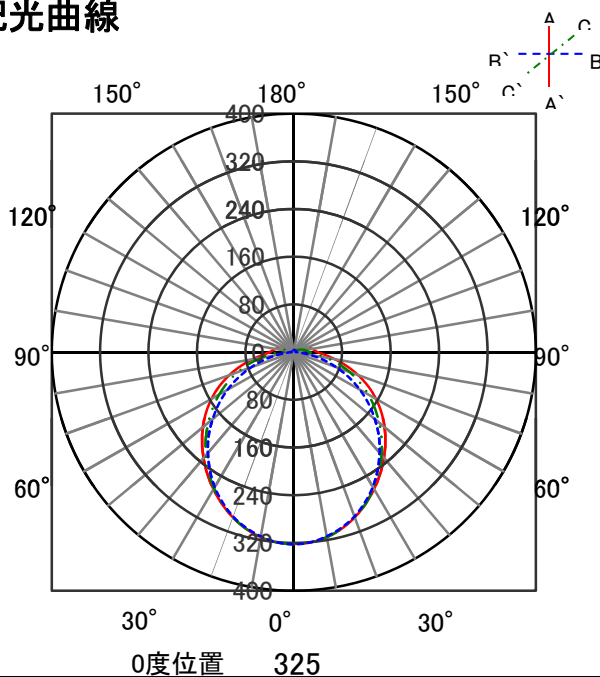

直射水平面照度

