


# ECOHiLUX照明器具 配光データシート

## 意匠図

|       |              |        |        |      |      |
|-------|--------------|--------|--------|------|------|
| 品名    | ラインルクスエッジ直付型 |        |        | 保守率  |      |
| セット品番 | EG-23WW-CL06 |        |        | 良    | 0.83 |
| 光源品番  | EGU-23WW-06  |        |        | 中    | 0.81 |
| 器具品番  | EGB-CL06     |        |        | 否    | 0.77 |
| 器具光束  | 2300lm       | 最大取付間隔 |        | 器具効率 |      |
| 光源    | LED          | A-A    | 1.55 H | 上方向  | 22%  |
| 光源光束  | -            | B-B    | 1.27 H | 下方向  | 78%  |
|       |              |        |        | 全方向  | 100% |

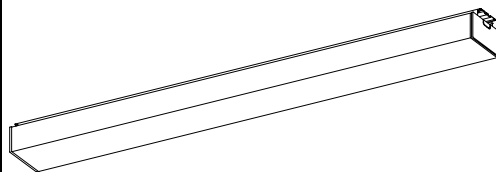


## 照明率表

作業面照明率(×0.01)

| 反射率(%) | 天井   | 80  |    |     |    |     |    |    |     | 70 |     |    |     |    |    |    |    | 50 |    |    |    | 30 |    | 0  |   |
|--------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|---|
|        |      | 壁   | 70 |     | 50 |     | 30 |    | 10  |    | 70  | 50 |     | 30 |    | 10 |    | 50 | 30 |    | 10 | 30 | 10 | 0  |   |
| 床      | 30   | 10  | 30 | 10  | 30 | 10  | 30 | 10 | 30  | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 |
| 室指数    | 0.4  | 41  | 38 | 28  | 27 | 20  | 20 | 15 | 39  | 36 | 26  | 25 | 19  | 19 | 15 | 24 | 23 | 18 | 18 | 14 | 16 | 16 | 13 | 10 |   |
|        | 0.6  | 55  | 51 | 41  | 39 | 32  | 31 | 25 | 52  | 48 | 39  | 37 | 31  | 30 | 25 | 35 | 34 | 28 | 28 | 23 | 26 | 26 | 21 | 18 |   |
|        | 0.8  | 65  | 59 | 50  | 47 | 40  | 38 | 32 | 61  | 56 | 47  | 45 | 38  | 37 | 31 | 43 | 41 | 35 | 34 | 29 | 32 | 32 | 27 | 23 |   |
|        | 1    | 73  | 65 | 58  | 54 | 48  | 45 | 39 | 68  | 62 | 55  | 51 | 46  | 44 | 38 | 50 | 47 | 42 | 41 | 35 | 38 | 37 | 33 | 28 |   |
|        | 1.25 | 81  | 72 | 66  | 61 | 56  | 53 | 46 | 76  | 68 | 63  | 58 | 54  | 51 | 45 | 57 | 53 | 49 | 47 | 42 | 45 | 44 | 39 | 34 |   |
|        | 1.5  | 86  | 76 | 72  | 65 | 62  | 58 | 51 | 80  | 72 | 68  | 63 | 59  | 56 | 50 | 61 | 58 | 54 | 51 | 46 | 49 | 48 | 43 | 37 |   |
|        | 2    | 93  | 81 | 81  | 73 | 72  | 65 | 59 | 88  | 78 | 77  | 70 | 68  | 63 | 58 | 69 | 64 | 62 | 58 | 54 | 56 | 54 | 50 | 43 |   |
|        | 2.5  | 99  | 85 | 88  | 78 | 79  | 71 | 66 | 93  | 81 | 83  | 75 | 75  | 69 | 64 | 74 | 68 | 68 | 64 | 59 | 61 | 59 | 55 | 48 |   |
|        | 3    | 102 | 88 | 93  | 81 | 84  | 75 | 70 | 96  | 84 | 87  | 78 | 80  | 72 | 68 | 78 | 72 | 72 | 67 | 63 | 65 | 62 | 59 | 51 |   |
|        | 4    | 107 | 91 | 99  | 86 | 92  | 81 | 76 | 100 | 87 | 93  | 82 | 87  | 78 | 74 | 83 | 76 | 78 | 72 | 69 | 70 | 67 | 64 | 56 |   |
|        | 5    | 110 | 93 | 103 | 89 | 97  | 84 | 80 | 103 | 89 | 97  | 85 | 92  | 81 | 78 | 86 | 79 | 82 | 75 | 72 | 73 | 70 | 67 | 59 |   |
|        | 7    | 114 | 96 | 109 | 92 | 104 | 89 | 86 | 107 | 92 | 102 | 89 | 98  | 86 | 83 | 90 | 82 | 87 | 79 | 77 | 77 | 73 | 71 | 63 |   |
|        | 10   | 117 | 98 | 113 | 95 | 109 | 93 | 90 | 110 | 94 | 106 | 92 | 103 | 89 | 87 | 94 | 85 | 91 | 83 | 81 | 81 | 77 | 75 | 66 |   |

## 配光曲線

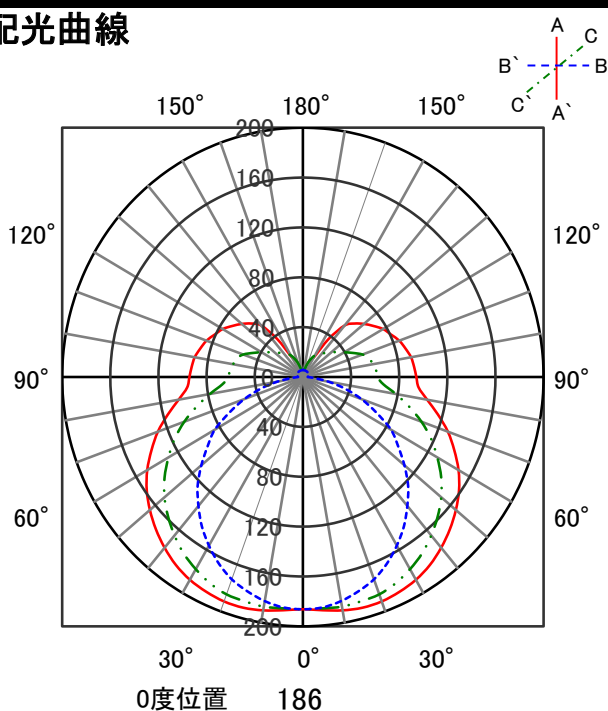

## 直射水平面照度

