


## ECOHiLUX照明器具 配光データシート

## 意匠図

| 品名    | LEDベースライト                |        |        | 保守率  |      |
|-------|--------------------------|--------|--------|------|------|
|       |                          |        |        | 良    | 0.81 |
|       |                          |        |        | 中    | 0.77 |
|       |                          |        |        | 否    | 0.68 |
| セット品番 | LX3-170-46WW-KK40-W250-D |        |        | 器具効率 |      |
| 光源品番  | LX3U170-47WW-40S-D       |        |        |      |      |
| 器具品番  | LXBF-KK40-W250-D         |        |        |      |      |
| 器具光束  | 4690lm                   | 最大取付間隔 |        | 上方向  | 1%   |
| 光源    | LED                      | A-A    | 1.32 H | 下方向  | 99%  |
| 光源光束  | 4785lm                   | B-B    | 1.25 H | 全方向  | 100% |

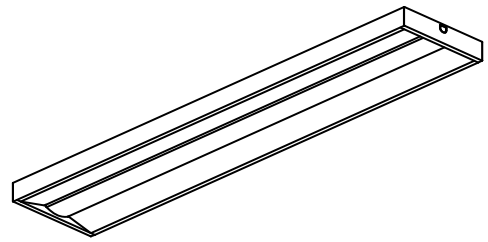


## 照明率表

作業面照明率(×0.01)

| (反射率)<br>(%) | 天井<br>壁<br>床 | 80  |     |     |     |     |    |     |     | 70  |     |     |     |    |     |     |     | 50  |    |     |    |    |    | 30 |  |  |  | 0 |
|--------------|--------------|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|-----|----|-----|-----|-----|-----|----|-----|----|----|----|----|--|--|--|---|
|              |              | 70  |     | 50  |     | 30  |    | 10  | 70  |     | 50  |     | 30  |    | 10  | 50  |     | 30  |    | 10  | 30 |    | 10 | 0  |  |  |  |   |
|              |              | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30  | 10  | 30  | 10 | 10  | 30  | 10  | 30  | 10 | 10  | 30 | 10 | 10 | 0  |  |  |  |   |
| 室<br>指<br>数  | 0.4          | 45  | 42  | 31  | 30  | 24  | 23 | 19  | 44  | 41  | 31  | 30  | 24  | 23 | 19  | 30  | 29  | 23  | 23 | 19  | 23 | 23 | 19 | 17 |  |  |  |   |
|              | 0.6          | 62  | 57  | 47  | 45  | 38  | 37 | 32  | 60  | 56  | 46  | 44  | 38  | 37 | 32  | 45  | 43  | 37  | 36 | 32  | 37 | 36 | 31 | 29 |  |  |  |   |
|              | 0.8          | 72  | 66  | 57  | 54  | 47  | 46 | 40  | 70  | 64  | 56  | 53  | 47  | 45 | 39  | 54  | 51  | 46  | 44 | 39  | 45 | 44 | 39 | 37 |  |  |  |   |
|              | 1            | 81  | 73  | 66  | 61  | 56  | 54 | 48  | 78  | 71  | 65  | 61  | 56  | 53 | 47  | 62  | 59  | 54  | 52 | 47  | 52 | 51 | 46 | 44 |  |  |  |   |
|              | 1.25         | 89  | 79  | 76  | 69  | 66  | 62 | 56  | 86  | 77  | 74  | 68  | 65  | 61 | 56  | 70  | 66  | 63  | 60 | 55  | 61 | 59 | 54 | 52 |  |  |  |   |
|              | 1.5          | 94  | 83  | 82  | 74  | 72  | 67 | 61  | 91  | 81  | 79  | 73  | 71  | 66 | 61  | 75  | 71  | 68  | 65 | 60  | 66 | 64 | 59 | 57 |  |  |  |   |
|              | 2            | 102 | 89  | 91  | 81  | 82  | 75 | 70  | 98  | 87  | 88  | 80  | 80  | 74 | 69  | 84  | 78  | 77  | 73 | 68  | 74 | 71 | 67 | 65 |  |  |  |   |
|              | 2.5          | 108 | 93  | 98  | 86  | 90  | 81 | 76  | 104 | 91  | 95  | 85  | 88  | 80 | 76  | 90  | 83  | 84  | 78 | 74  | 80 | 77 | 73 | 70 |  |  |  |   |
|              | 3            | 111 | 95  | 102 | 90  | 95  | 85 | 80  | 107 | 94  | 99  | 88  | 92  | 84 | 80  | 93  | 86  | 88  | 82 | 78  | 84 | 80 | 77 | 74 |  |  |  |   |
|              | 4            | 116 | 99  | 109 | 94  | 102 | 90 | 86  | 111 | 97  | 105 | 93  | 99  | 89 | 85  | 99  | 90  | 94  | 87 | 84  | 89 | 85 | 83 | 80 |  |  |  |   |
|              | 5            | 119 | 101 | 113 | 97  | 107 | 93 | 90  | 114 | 99  | 109 | 96  | 104 | 92 | 89  | 102 | 93  | 98  | 90 | 88  | 93 | 88 | 86 | 83 |  |  |  |   |
|              | 7            | 122 | 103 | 118 | 100 | 113 | 97 | 95  | 118 | 101 | 114 | 99  | 110 | 96 | 94  | 106 | 96  | 103 | 94 | 92  | 97 | 92 | 90 | 87 |  |  |  |   |
| 10           | 125          | 104 | 122 | 103 | 118 | 101 | 99 | 120 | 103 | 117 | 101 | 114 | 99  | 98 | 109 | 99  | 107 | 97  | 96 | 101 | 95 | 94 | 91 |    |  |  |  |   |

## 配光曲線

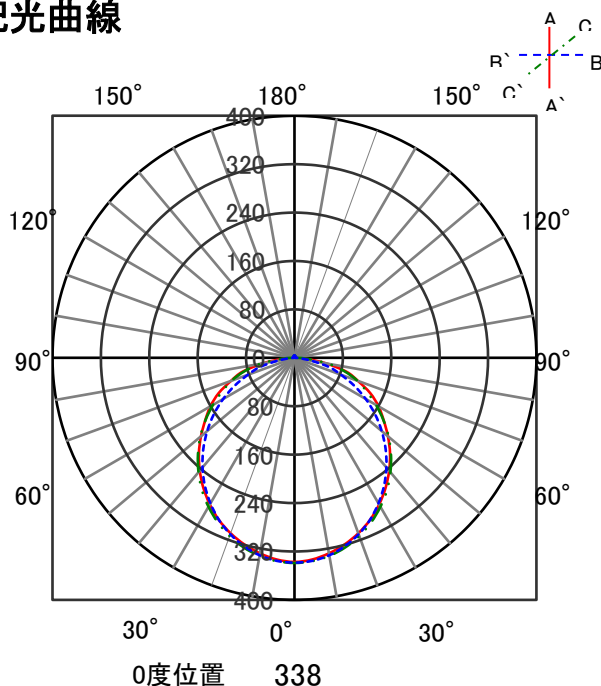

## 直射水平面照度

