


ECOHILUX照明器具 配光データシート

意匠図


|       |                      |        |       |      |      |
|-------|----------------------|--------|-------|------|------|
| 品名    | LEDベースライト            |        |       | 保守率  |      |
| セット品番 | LX4-170-52L-CL40W-LI |        |       | 良    | 0.83 |
| 光源品番  | LX4U170-52L-40S-LI   |        |       | 中    | 0.81 |
| 器具品番  | LXBF-CL40W           |        |       | 否    | 0.77 |
| 器具光束  | 4890 lm              | 最大取付間隔 |       | 器具効率 |      |
| 光源    | LED                  | AA     | 1.64h | 上方向  | 4%   |
| 光源光束  | 4890 lm              | BB     | 1.29h | 下方向  | 96%  |
|       |                      |        |       | 全方向  | 100% |

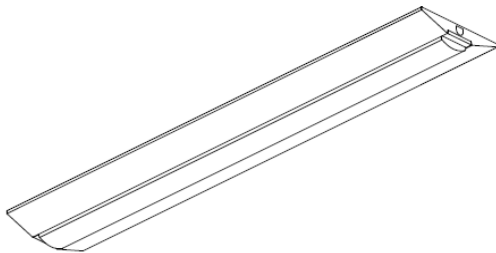

照明率表

|        |     | 作業面照明率(×0.01) |     |     |     |     |    |    |     |     |     |     |     |    |    |     |    |     |    |    |    |    |    |    |    |    |    |    |    |
|--------|-----|---------------|-----|-----|-----|-----|----|----|-----|-----|-----|-----|-----|----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|----|----|
| 反射率(%) | 天井  | 80            |     |     |     |     |    |    |     | 70  |     |     |     |    |    |     |    | 50  |    |    |    |    |    | 30 |    |    |    | 0  |    |
|        |     | 70            |     | 50  |     | 30  |    | 10 |     | 70  |     | 50  |     | 30 |    | 10  |    | 50  |    | 30 |    | 10 |    | 30 |    | 10 |    | 0  |    |
|        | 壁床  | 30            | 10  | 30  | 10  | 30  | 10 | 30 | 10  | 30  | 10  | 30  | 10  | 30 | 10 | 30  | 10 | 30  | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0  | 0  |
| 室指数    | 0.4 | 44            | 42  | 31  | 30  | 23  | 23 | 18 | 43  | 41  | 30  | 29  | 23  | 23 | 18 | 29  | 28 | 23  | 22 | 18 | 22 | 22 | 18 | 22 | 22 | 18 | 16 | 16 | 16 |
|        | 0.6 | 61            | 56  | 47  | 44  | 38  | 36 | 31 | 59  | 55  | 46  | 43  | 37  | 36 | 31 | 44  | 42 | 36  | 35 | 31 | 35 | 35 | 30 | 28 | 28 | 28 | 28 | 28 | 28 |
|        | 0.8 | 71            | 65  | 56  | 53  | 47  | 45 | 39 | 69  | 63  | 55  | 52  | 46  | 44 | 38 | 52  | 50 | 44  | 43 | 38 | 43 | 42 | 37 | 35 | 35 | 35 | 35 | 35 | 35 |
|        | 1   | 80            | 72  | 65  | 60  | 55  | 52 | 46 | 77  | 70  | 64  | 59  | 54  | 52 | 46 | 60  | 57 | 53  | 51 | 45 | 51 | 49 | 45 | 42 | 42 | 42 | 42 | 42 | 42 |
|        | 1.3 | 88            | 78  | 74  | 68  | 65  | 61 | 55 | 85  | 76  | 72  | 67  | 63  | 60 | 54 | 69  | 65 | 61  | 58 | 53 | 59 | 57 | 53 | 50 | 50 | 50 | 50 | 50 | 50 |
|        | 1.5 | 93            | 82  | 80  | 73  | 71  | 66 | 60 | 90  | 80  | 78  | 72  | 69  | 65 | 59 | 74  | 69 | 66  | 63 | 58 | 64 | 62 | 57 | 54 | 54 | 54 | 54 | 54 | 54 |
|        | 2   | 101           | 88  | 90  | 80  | 80  | 74 | 68 | 97  | 86  | 87  | 79  | 79  | 73 | 67 | 82  | 76 | 75  | 71 | 66 | 72 | 69 | 65 | 62 | 62 | 62 | 62 | 62 | 62 |
|        | 2.5 | 106           | 92  | 96  | 85  | 88  | 79 | 74 | 102 | 90  | 93  | 84  | 86  | 78 | 74 | 87  | 81 | 81  | 76 | 72 | 77 | 74 | 71 | 68 | 68 | 68 | 68 | 68 | 68 |
|        | 3   | 110           | 94  | 101 | 88  | 93  | 83 | 79 | 105 | 92  | 97  | 87  | 91  | 82 | 78 | 91  | 84 | 86  | 80 | 76 | 81 | 78 | 75 | 71 | 71 | 71 | 71 | 71 | 71 |
|        | 4   | 114           | 97  | 107 | 93  | 100 | 88 | 84 | 110 | 95  | 103 | 91  | 97  | 87 | 84 | 96  | 88 | 92  | 85 | 82 | 87 | 83 | 80 | 76 | 76 | 76 | 76 | 76 | 76 |
|        | 5   | 117           | 99  | 111 | 95  | 105 | 92 | 88 | 113 | 98  | 107 | 94  | 102 | 91 | 87 | 100 | 91 | 96  | 88 | 85 | 90 | 86 | 83 | 80 | 80 | 80 | 80 | 80 | 80 |
|        | 7   | 121           | 102 | 116 | 99  | 112 | 96 | 93 | 116 | 100 | 112 | 97  | 108 | 95 | 92 | 104 | 94 | 101 | 92 | 90 | 94 | 89 | 88 | 84 | 84 | 84 | 84 | 84 | 84 |
|        | 10  | 124           | 103 | 120 | 101 | 117 | 99 | 97 | 119 | 102 | 115 | 100 | 112 | 98 | 96 | 107 | 97 | 105 | 95 | 93 | 98 | 92 | 91 | 87 | 87 | 87 | 87 | 87 | 87 |

配光曲線

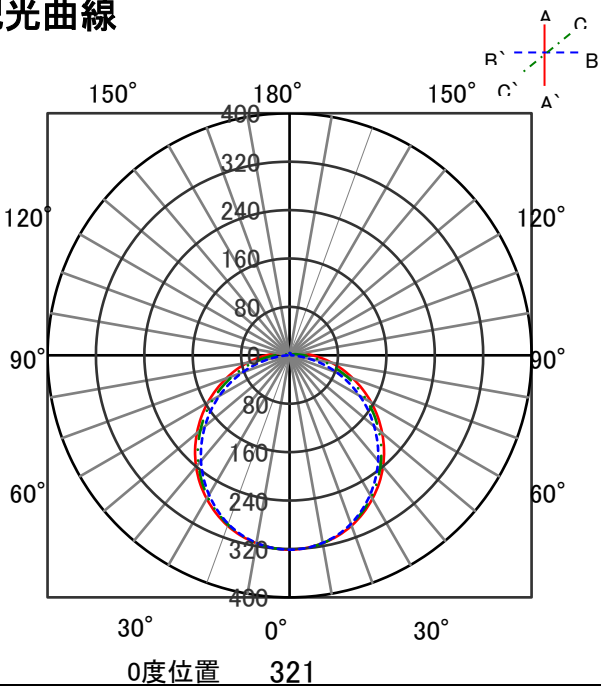

直射水平面照度

