


## ECOHiLUX照明器具 配光データシート

## 意匠図




器具品名	乳白ガラス ペンダント1灯(プラグ)	保守率	
		良	0.67
器具品番	PLTV-1E17R		0.63
	中	0.56	
部品品名	-		0.56
	器具効率		
器具光束	437lm		20%
	上方向	62%	
光源	LDG5L-H-E17-WP		81%
	下方向	30%	
光源光束	540lm	全方向	10%

## 照明率表

作業面照明率(×0.01)																								
反射率	天井	80								70								50			0			
	壁	70		50		30		10		70		50		30		10		50		30		0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	0		
室 指 数	0.4	43	40	30	29	23	22	18	41	38	29	28	22	22	18	26	26	20	20	16	19	15	12	
	0.6	57	52	43	40	34	33	28	54	50	41	39	33	32	27	37	35	30	29	25	28	27	20	
	0.8	67	61	52	49	43	41	35	63	57	49	47	41	39	34	45	43	38	36	32	34	30	25	
	1	74	66	59	55	50	47	41	69	63	56	53	48	45	40	51	48	43	42	37	40	39	29	
	1.25	81	72	67	61	57	54	47	76	68	64	59	55	52	46	57	54	50	48	43	45	44	40	34
	1.5	86	76	73	66	63	59	52	81	72	69	63	60	56	51	62	58	55	52	47	49	48	44	37
	2	94	81	82	73	72	66	60	87	77	77	70	69	63	58	68	64	62	58	54	56	54	50	43
	2.5	99	85	88	78	79	71	66	92	81	83	74	75	68	63	73	68	67	63	59	60	58	54	47
	3	102	88	92	81	84	75	70	95	83	87	77	80	72	67	77	71	71	66	63	64	61	58	50
	4	107	91	99	85	92	81	76	100	87	93	82	86	77	73	82	75	77	71	68	68	65	63	54
	5	110	93	103	88	97	84	80	103	89	97	85	91	81	77	85	78	81	74	71	72	68	66	57
	7	114	96	108	92	103	89	85	106	91	101	88	97	85	82	89	81	86	78	76	76	72	70	61
	10	117	98	113	95	109	92	90	109	93	105	91	102	89	87	93	84	90	82	80	79	75	73	64

## 配光曲線

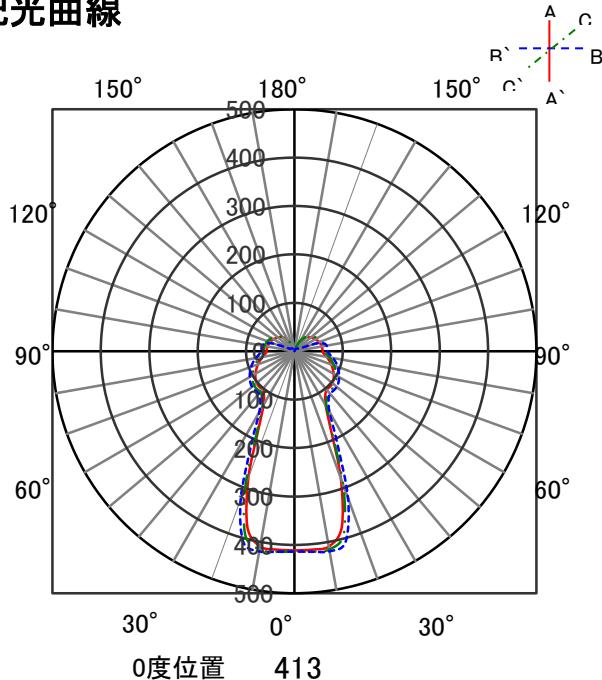

## 直射水平面照度

