


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LED投光器	保守率	
器具品番	FL2M-100W-25-K57-R7	良	
部品品名	-	中	
部品品番	-	否	
		器具効率	
器具光束	16000lm	上方向	0%
光源	LED	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%



照明率表

作業面照明率(×0.01)																									
反射率	天井	80								70				50			30		0						
		壁		70		50		30		10		70		50		30		10		30		10		0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	51	48	38	37	32	31	27	50	47	38	37	31	31	27	37	36	31	30	27	31	30	27	25	
	0.6	68	63	55	52	47	45	41	66	62	54	52	46	45	41	53	51	46	45	40	45	44	40	39	
	0.8	79	72	66	62	58	55	51	77	71	65	61	57	55	50	63	60	56	54	50	55	54	50	48	
	1	87	78	75	69	66	63	58	85	77	73	68	65	62	58	71	67	64	62	57	62	61	57	55	
	1.25	95	84	83	76	74	70	65	92	83	81	75	73	69	65	78	73	71	68	64	70	68	64	62	
	1.5	100	88	89	81	81	75	70	97	86	87	80	79	74	70	83	78	77	73	69	75	72	69	67	
	2	106	93	97	87	90	82	78	103	91	95	86	88	81	77	90	84	85	80	77	82	79	76	74	
	2.5	111	96	103	91	96	87	83	107	94	100	90	94	86	82	95	88	90	84	81	87	83	80	78	
	3	114	98	107	93	101	90	86	110	96	104	92	98	89	86	98	90	94	87	85	90	86	84	81	
	4	118	100	112	97	107	94	91	114	99	109	96	104	93	91	103	94	99	92	89	94	90	88	86	
5	120	102	115	99	111	97	94	116	101	112	98	108	96	94	105	96	102	94	92	97	92	91	88		
7	123	104	120	102	116	100	98	119	102	116	101	113	99	97	108	98	106	97	96	100	95	94	91		
10	125	105	123	104	120	102	101	121	104	119	102	116	101	100	111	100	109	99	98	103	97	97	94		

配光曲線

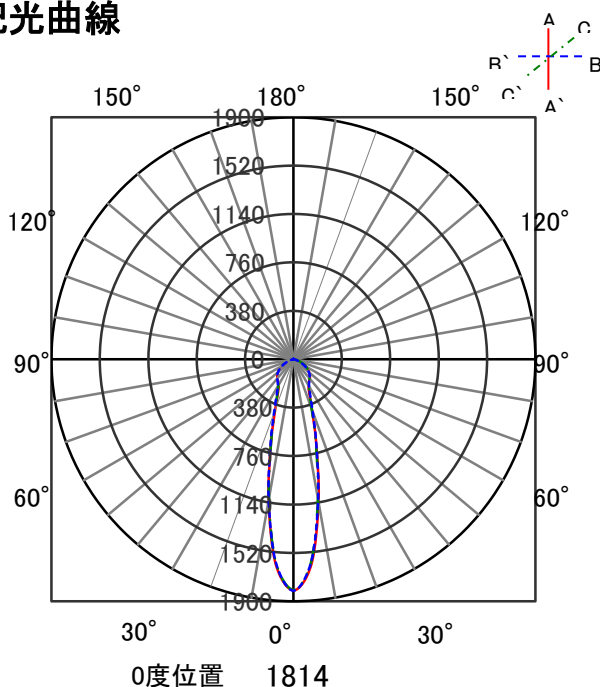

直射水平面照度

