


ECOHiLUX照明器具 配光データシート

意匠図


| | | | |
|------|------------------|------|------|
| 器具品名 | グレアレスピンホールダウンライト | 保守率 | |
| 器具品番 | UVS3L308-55P3W-D | 良 | 0.69 |
| 部品品名 | - | 中 | 0.67 |
| 部品品番 | - | 否 | 0.63 |
| 器具光束 | 380lm | 器具効率 | |
| 光源 | - | 上方向 | 0% |
| 光源光束 | 一体型器具のため、器具光束表示 | 下方向 | 100% |
| | | 全方向 | 100% |

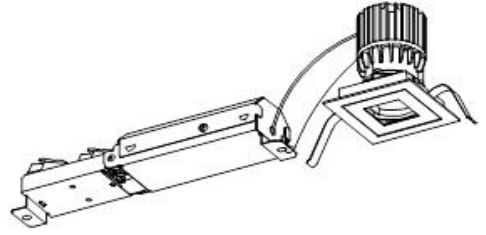

照明率表

| | | 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-------------|------|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|---|--|--|--|---|--|--|--|--|--|--|--|
| 反射率 | 天井 | 80 | | | | | | | | 70 | | | | | | | | 50 | | | | | | | | 30 | | | | | | | | 0 | | | | | | | |
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 30 | | 10 | | 30 | | 10 | | 0 | | | | | | | | | | | | | |
| 床 | | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 0 | | | | | | | | | | | |
| 室 指 数 | 0.4 | 69 | 64 | 58 | 56 | 52 | 51 | 48 | 67 | 64 | 57 | 55 | 52 | 51 | 47 | 57 | 55 | 51 | 50 | 47 | 51 | 50 | 47 | 46 | 46 | 46 | 46 | 46 | 46 | | | | | | | | | | | | |
| | 0.6 | 88 | 81 | 77 | 74 | 71 | 69 | 66 | 86 | 80 | 77 | 73 | 71 | 69 | 66 | 75 | 72 | 70 | 68 | 65 | 69 | 68 | 65 | 64 | 64 | 64 | 64 | 64 | 64 | | | | | | | | | | | | |
| | 0.8 | 98 | 89 | 88 | 83 | 82 | 78 | 75 | 96 | 88 | 87 | 82 | 81 | 78 | 75 | 85 | 81 | 80 | 77 | 75 | 79 | 77 | 74 | 73 | 73 | 73 | 73 | 73 | 73 | | | | | | | | | | | | |
| | 1 | 104 | 94 | 95 | 88 | 88 | 84 | 81 | 102 | 93 | 93 | 87 | 87 | 83 | 81 | 91 | 86 | 86 | 83 | 80 | 84 | 82 | 80 | 78 | 78 | 78 | 78 | 78 | 78 | | | | | | | | | | | | |
| | 1.25 | 110 | 98 | 101 | 93 | 95 | 89 | 86 | 107 | 97 | 99 | 92 | 94 | 89 | 86 | 96 | 91 | 92 | 88 | 85 | 90 | 87 | 85 | 83 | 83 | 83 | 83 | 83 | 83 | | | | | | | | | | | | |
| | 1.5 | 113 | 100 | 105 | 96 | 99 | 92 | 89 | 111 | 99 | 103 | 95 | 98 | 92 | 89 | 100 | 93 | 95 | 91 | 88 | 93 | 90 | 88 | 86 | 86 | 86 | 86 | 86 | 86 | | | | | | | | | | | | |
| | 2 | 118 | 103 | 111 | 99 | 105 | 96 | 94 | 115 | 102 | 109 | 98 | 104 | 96 | 93 | 104 | 97 | 100 | 95 | 93 | 97 | 93 | 92 | 90 | 90 | 90 | 90 | 90 | 90 | | | | | | | | | | | | |
| | 2.5 | 121 | 105 | 115 | 102 | 110 | 99 | 97 | 118 | 104 | 112 | 101 | 108 | 99 | 97 | 107 | 99 | 104 | 97 | 96 | 100 | 96 | 95 | 93 | 93 | 93 | 93 | 93 | 93 | | | | | | | | | | | | |
| | 3 | 124 | 106 | 118 | 104 | 114 | 101 | 99 | 120 | 105 | 115 | 103 | 111 | 101 | 99 | 110 | 101 | 106 | 99 | 98 | 102 | 98 | 97 | 94 | 94 | 94 | 94 | 94 | 94 | | | | | | | | | | | | |
| | 4 | 127 | 108 | 122 | 106 | 119 | 104 | 103 | 123 | 107 | 119 | 105 | 116 | 103 | 102 | 113 | 103 | 110 | 102 | 101 | 105 | 100 | 99 | 97 | 97 | 97 | 97 | 97 | 97 | | | | | | | | | | | | |
| 5 | 129 | 109 | 125 | 107 | 122 | 106 | 105 | 124 | 108 | 121 | 106 | 119 | 105 | 104 | 115 | 105 | 113 | 104 | 103 | 107 | 102 | 101 | 99 | 99 | 99 | 99 | 99 | 99 | | | | | | | | | | | | | |
| 7 | 131 | 110 | 128 | 109 | 126 | 108 | 108 | 126 | 109 | 124 | 108 | 123 | 108 | 107 | 117 | 106 | 116 | 106 | 105 | 110 | 104 | 104 | 101 | 101 | 101 | 101 | 101 | 101 | | | | | | | | | | | | | |
| 10 | 132 | 111 | 131 | 111 | 130 | 110 | 110 | 128 | 110 | 127 | 109 | 125 | 109 | 109 | 119 | 107 | 118 | 107 | 107 | 111 | 105 | 105 | 102 | 102 | 102 | 102 | 102 | 102 | | | | | | | | | | | | | |

配光曲線

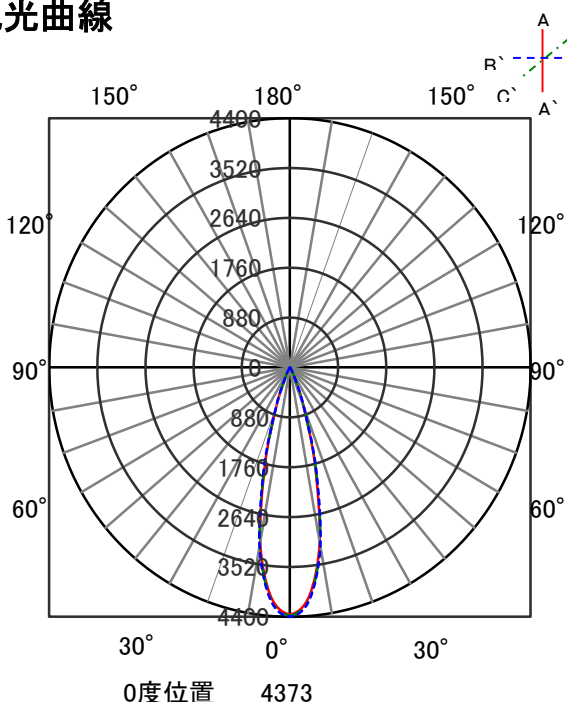

直射水平面照度

